SIEMENS

Data sheet 3RW5073-6TB14

SIRIUS



SIRIUS soft starter 200-480 V 250 A, 110-250 V AC Screw terminals Thermistor input



| product category | Hybrid switching devices | |
|---------------------------------------------------------------------------------------------------|------------------------------------------------------|--|
| product designation | Soft starter | |
| product type designation | 3RW50 | |
| manufacturer's article number | | |
| of standard HMI module usable | 3RW5980-0HS01 | |
| of high feature HMI module usable | 3RW5980-0HF00 | |
| of communication module PROFINET standard usable | 3RW5980-0CS00 | |
| of communication module PROFIBUS usable | 3RW5980-0CP00 | |
| of communication module Modbus TCP usable | 3RW5980-0CT00 | |
| of communication module Modbus RTU usable | 3RW5980-0CR00 | |
| of communication module Ethernet/IP | 3RW5980-0CE00 | |
| of circuit breaker usable at 400 V | 3VA2440-7MN32-0AA0; Type of assignment 1, Iq = 65 kA | |
| of circuit breaker usable at 500 V | 3VA2440-7MN32-0AA0; Type of assignment 1, Iq = 65 kA | |
| of the gG fuse usable up to 690 V | 2x3NA3354-6; Type of coordination 1, Iq = 65 kA | |
| of full range R fuse link for semiconductor protection usable up to 690 V | 3NE1 331-0; Type of coordination 2, Iq = 65 kA | |
| of back-up R fuse link for semiconductor protection usable up to 690 V | 3NE3 335; Type of coordination 2, Iq = 65 kA | |
| of line contactor usable up to 480 V | <u>3RT1065</u> | |
| of line contactor usable up to 690 V | <u>3RT1065</u> | |
| General technical data | | |
| starting voltage [%] | 30 100 % | |
| stopping voltage [%] | 50 %; non-adjustable | |
| start-up ramp time of soft starter | 0 20 s | |
| ramp-down time of soft starter | 0 20 s | |
| current limiting value [%] adjustable | 130 700 % | |
| certificate of suitability | | |
| CE marking | Yes | |
| UL approval | Yes | |
| CSA approval | Yes | |
| product component | | |
| HMI-High Feature | No | |
| • is supported HMI-Standard | Yes | |
| • is supported HMI-High Feature | Yes | |
| product feature integrated bypass contact system | Yes | |
| number of controlled phases | 2 | |
| buffering time in the event of power failure | | |

| for main current circuit | 100 ms |
|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| for control circuit | 100 ms |
| insulation voltage rated value | 600 V |
| degree of pollution | 3, acc. to IEC 60947-4-2 |
| impulse voltage rated value | 5, acc. to fee 60547-4-2 |
| <u> </u> | 1 600 V |
| blocking voltage of the thyristor maximum service factor | 1 |
| | 6 kV |
| surge voltage resistance rated value maximum permissible voltage for protective separation | O KV |
| | 600 V |
| between main and auxiliary circuit shock resistance | 15 g / 11 ms, from 12 g / 11 ms with potential contact lifting |
| | AC-53a |
| utilization category according to IEC 60947-4-2 | Q Q |
| reference code according to IEC 81346-2 | 09/23/2019 |
| Substance Prohibitance (Date) | Lead - 7439-92-1 |
| SVHC substance name | Lead - 743-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 1,6,7,8,9,14,15,16,17,17,18,18- Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]octadeca-7,15-diene ("Dechlorane Plus" M) covering any of its individual anti- and syn-isomers or any combination thereof Dicyclohexyl phthalate (DCHP) - 84-61-7 Dodecamethylcyclohexasiloxane (D6) - 540-97-6 |
| product function | , , , , , , , , , , , , , , , , , , , |
| ramp-up (soft starting) | Yes |
| • ramp-down (soft stop) | Yes |
| Soft Torque | Yes |
| adjustable current limitation | Yes |
| pump ramp down | Yes |
| intrinsic device protection | Yes |
| motor overload protection | Yes; Full motor protection (thermistor motor protection and electronic motor |
| · | overload protection) |
| evaluation of thermistor motor protection | Yes; Type A PTC or Klixon / Thermoclick |
| auto-RESET | Yes |
| manual RESET | Yes |
| • remote reset | Yes; By turning off the control supply voltage |
| communication function | Yes |
| operating measured value display | Yes; Only in conjunction with special accessories |
| • error logbook | Yes; Only in conjunction with special accessories |
| via software parameterizable | No |
| via software configurable | Yes |
| PROFlenergy | Yes; in connection with the PROFINET Standard communication module |
| voltage ramp | Yes |
| • torque control | No |
| analog output | No |
| Power Electronics | |
| operational current | |
| • at 40 °C rated value | 250 A |
| at 50 °C rated value | 220 A |
| at 60 °C rated value | 200 A |
| operating voltage | |
| rated value | 200 480 V |
| relative negative tolerance of the operating voltage | -15 % |
| relative positive tolerance of the operating voltage | 10 % |
| operating power for 3-phase motors | |
| at 230 V at 40 °C rated value | 75 kW |
| at 400 V at 40 °C rated value | 132 kW |
| Operating frequency 1 rated value | 50 Hz |
| Operating frequency 2 rated value | 60 Hz |
| relative negative tolerance of the operating frequency | -10 % |
| relative positive tolerance of the operating frequency | 10 % |
| adjustable motor current | |
| at rotary coding switch on switch position 1 | 100 A |

| at rotary coding switch on switch position 2 | 110 A |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| at rotary coding switch on switch position 3 | 120 A |
| at rotary coding switch on switch position 4 | 130 A |
| at rotary coding switch on switch position 5 | 140 A |
| at rotary coding switch on switch position 6 | 150 A |
| at rotary coding switch on switch position 7 | 160 A |
| at rotary coding switch on switch position 8 | 170 A |
| at rotary coding switch on switch position 9 | 180 A |
| at rotary coding switch on switch position 10 at rotary coding switch on switch position 10 | 190 A |
| | 200 A |
| at rotary coding switch on switch position 11 | |
| at rotary coding switch on switch position 12 | 210 A |
| at rotary coding switch on switch position 13 | 220 A |
| at rotary coding switch on switch position 14 | 230 A |
| at rotary coding switch on switch position 15 | 240 A |
| at rotary coding switch on switch position 16 | 250 A |
| • minimum | 100 A |
| minimum load [%] | 15 %; Relative to smallest settable le |
| power loss [W] for rated value of the current at AC | |
| at 40 °C after startup | 23 W |
| at 50 °C after startup | 18 W |
| at 60 °C after startup | 15 W |
| power loss [W] at AC at current limitation 350 % | |
| at 40 °C during startup | 2 454 W |
| at 50 °C during startup | 2 043 W |
| at 60 °C during startup | 1 786 W |
| type of the motor protection | Electronic, tripping in the event of thermal overload of the motor |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC |
| control supply voltage at AC | |
| • at 50 Hz | 110 250 V |
| ● at 60 Hz | 110 250 V |
| relative negative tolerance of the control supply voltage at AC at 50 Hz | -15 % |
| AU at 30 HZ | |
| relative positive tolerance of the control supply voltage at AC at 50 Hz | 10 % |
| relative positive tolerance of the control supply voltage at | 10 % -15 % |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at | |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at | -15 % |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz | -15 % 10 % |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency | -15 % 10 % 50 60 Hz -10 % 10 % |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A Varistor |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu=600 A), C6 miniature circuit breaker (Icu=300 A); Is not part of scope of supply |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu=600 A), C6 miniature circuit breaker (Icu=300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital outputs • not parameterizable digital output version number of analog outputs | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu=600 A), C6 miniature circuit breaker (Icu=300 A); Is not part of scope of supply |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 0 |
| relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital outputs • not parameterizable digital output version number of analog outputs | -15 % 10 % 50 60 Hz -10 % 10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu=600 A), C6 miniature circuit breaker (Icu=300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) |

| nstallation/ mounting/ dimensions | with vertical magnification and for a 1,000 and table 100 and |
|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| mounting position | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| fastening method | screw fixing |
| height | 230 mm |
| width | 160 mm |
| depth | 282 mm |
| required spacing with side-by-side mounting | |
| • forwards | 10 mm |
| backwards | 0 mm |
| • upwards | 100 mm |
| • downwards | 75 mm |
| at the side | 5 mm |
| weight without packaging | 7.3 kg |
| onnections/ Terminals | |
| type of electrical connection | |
| for main current circuit | busbar connection |
| for control circuit | screw-type terminals |
| width of connection bar maximum | 35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm |
| wire length for thermistor connection | |
| with conductor cross-section = 0.5 mm² maximum | 50 m |
| with conductor cross-section = 1.5 mm² maximum | 150 m |
| with conductor cross-section = 2.5 mm² maximum | 250 m |
| type of connectable conductor cross-sections for main | |
| contacts for box terminal | |
| using the front clamping point solid | 95 300 mm² |
| using the front clamping point finely stranded with core end processing | 70 240 mm² |
| using the front clamping point finely stranded without core end processing | 70 240 mm² |
| using the front clamping point stranded | 95 300 mm² |
| using the back clamping point solid | 120 240 mm² |
| r box terminal using the back clamping point | 250 500 kcmil |
| using both clamping points solid | min. 2x 70 mm², max. 2x 240 mm² |
| using both clamping points finely stranded with core end processing | min. 2x 50 mm², max. 2x 185 mm² |
| using both clamping points finely stranded without core end processing | min. 2x 50 mm², max. 2x 185 mm² |
| using both clamping points stranded | min. 2x 70 mm², max. 2x 240 mm² |
| using the back clamping point finely stranded with core end processing | 120 185 mm² |
| using the back clamping point finely stranded without core end processing | |
| using the back clamping point stranded | 120 240 mm² |
| type of connectable conductor cross-sections | 0/0 5001 1 |
| for AWG cables for main current circuit solid | 2/0 500 kcmil |
| for DIN cable lug for main contacts stranded | 50 240 mm² |
| for DIN cable lug for main contacts finely stranded | 70 240 mm² |
| type of connectable conductor cross-sections | 4 (0.5 4.0 3) 0 (0.7 0.7 3) |
| for control circuit solid | 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) |
| for control circuit finely stranded with core end processing | 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) |
| for AWG cables for control circuit solid | 1x (20 12), 2x (20 14) |
| wire length | 000 |
| between soft starter and motor maximum | 800 m |
| at the digital inputs at AC maximum | 1 000 m |
| tightening torque | 4 |
| for main contacts with screw-type terminals | 14 24 N·m |
| for auxiliary and control contacts with screw-type terminals | 0.8 1.2 N·m |
| tightening torque [lbf·in] | |
| for main contacts with screw-type terminals | 124 210 lbf-in |
| for auxiliary and control contacts with screw-type | 7 10.3 lbf·in |

| Ambient conditions | |
|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| installation altitude at height above sea level maximum | 5 000 m; derating as of 1000 m, see Manual |
| ambient temperature | , , , , , , , , , , , , , , , , , , , , |
| during operation | -25 +60 °C; Please observe derating at temperatures of 40 °C or above |
| during storage and transport | -40 +80 °C |
| environmental category | 40 100 0 |
| during operation according to IEC 60721 | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| during storage according to IEC 60721 | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 |
| during transport according to IEC 60721 | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) |
| Environmental footprint | |
| Siemens Eco Profile (SEP) | Siemens EcoTech |
| EMC emitted interference | acc. to IEC 60947-4-2: Class A |
| Communication/ Protocol | |
| communication module is supported | |
| PROFINET standard | Yes |
| • EtherNet/IP | Yes |
| Modbus RTU | Yes |
| Modbus TCP | Yes |
| PROFIBUS | Yes |
| UL/CSA ratings | 165 |
| | |
| manufacturer's article number | |
| of circuit breaker | 0: |
| — usable for High Faults at 460/480 V according to UL | Siemens type: 3VA54, max. 600 A; Iq max = 65 kA |
| • of the fuse | T 0 1 1 10 10 10 10 10 10 10 10 10 10 10 |
| — usable for Standard Faults up to 575/600 V according to UL | Type: Class L, max. 800 A; lq = 18 kA |
| usable for High Faults up to 575/600 V according to | Type: Class L, max. 800 A; Iq = 100 kA |
| operating power [hp] for 3-phase motors | |
| • at 200/208 V at 50 °C rated value | 60 hp |
| at 220/230 V at 50 °C rated value | 75 hp |
| • at 460/480 V at 50 °C rated value | 150 hp |
| Electrical Safety | 100 110 |
| protection class IP on the front according to IEC 60529 | IP00; IP20 with cover |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front with cover |
| ATEX | imger-sale, for vertical contact from the front with cover |
| | CII 1 |
| Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX | SIL1 |
| PFHD with high demand rate according to IEC 61508 relating to ATEX | 9E-6 1/h |
| PFDavg with low demand rate according to IEC 61508 relating to ATEX | 0.09 |
| hardware fault tolerance according to IEC 61508 relating to ATEX | 0 |
| T1 value for proof test interval or service life according to IEC 61508 relating to ATEX | 3 a |
| certificate of suitability | |
| • ATEX | Yes |
| • IECEx | Yes |
| • UKEX | Yes |
| Approvals Certificates | |
| Consul Product Approval | |

General Product Approval



Confirmation









EMV For use in hazardous locations Test Certificates Marine / Shipping





Miscellaneous

Type Test Certificates/Test Report



Marine / Shipping

other

Environment











Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5073-6TB14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5073-6TB14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5073-6TB14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5073-6TB14&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5073-6TB14/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5073-6TB14&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

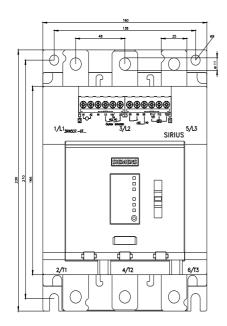

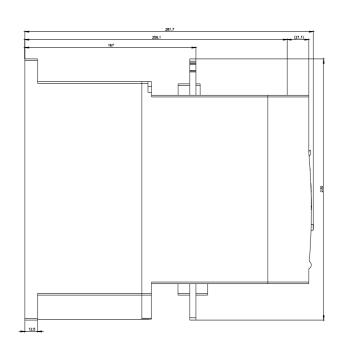

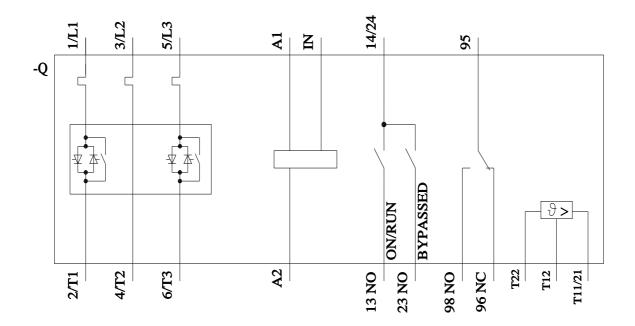

last modified: 4/19/2024 🖸