SIEMENS

product brand name

Data sheet 3RW5076-2TB14

SIRIUS



SIRIUS soft starter 200-480 V 470 A, 110-250 V AC Spring-loaded terminals Thermistor input





product action control			
product category	Hybrid switching devices		
product designation	Soft starter		
product type designation	3RW50		
manufacturer's article number			
 of standard HMI module usable 	3RW5980-0HS01		
 of high feature HMI module usable 	3RW5980-0HF00		
 of communication module PROFINET standard usable 	3RW5980-0CS00		
 of communication module PROFIBUS usable 	3RW5980-0CP00		
 of communication module Modbus TCP usable 	3RW5980-0CT00		
 of communication module Modbus RTU usable 	3RW5980-0CR00		
 of communication module Ethernet/IP 	3RW5980-0CE00		
 of circuit breaker usable at 400 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA		
 of circuit breaker usable at 500 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA		
 of the gG fuse usable up to 690 V 	2x3NA3365-6; Type of coordination 1, Iq = 65 kA		
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1 436-2; Type of coordination 2, Iq = 65 kA		
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE3 340-8; Type of coordination 2, Iq = 65 kA		
 of line contactor usable up to 480 V 	<u>3RT1076</u>		
 of line contactor usable up to 690 V 	<u>3RT1076</u>		
General technical data			
starting voltage [%]	30 100 %		
stopping voltage [%]	50 %; non-adjustable		
start-up ramp time of soft starter	0 20 s		
ramp-down time of soft starter	0 20 s		
current limiting value [%] adjustable	130 700 %		
certificate of suitability			
CE marking	Yes		
UL approval	Yes		
CSA approval	Yes		
product component			
HMI-High Feature	No		
• is supported HMI-Standard	Yes		
• is supported HMI-High Feature	Yes		
product feature integrated bypass contact system	Yes		
number of controlled phases	2		
buffering time in the event of power failure			

• for main current circuit	100 ms		
for main current circuit for control circuit	100 ms		
insulation voltage rated value	100 ms 600 V		
degree of pollution	3, acc. to IEC 60947-4-2		
impulse voltage rated value	3, acc. to IEC 60947-4-2 6 kV		
blocking voltage of the thyristor maximum			
service factor	1 600 V		
	6 kV		
surge voltage resistance rated value	O KV		
maximum permissible voltage for protective separation	600 V		
between main and auxiliary circuit			
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting		
utilization category according to IEC 60947-4-2	AC-53a		
reference code according to IEC 81346-2	Q 200/201/2040		
Substance Prohibitance (Date)	09/23/2019		
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 1,6,7,8,9,14,15,16,17,17,18,18- Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]octadeca-7,15-diene ("Dechlorane Plus"™) covering any of its individual anti- and syn-isomers or any combination thereof Dicyclohexyl phthalate (DCHP) - 84-61-7 Dodecamethylcyclohexasiloxane (D6) - 540-97-6		
product function			
• ramp-up (soft starting)	Yes		
• ramp-down (soft stop)	Yes		
• Soft Torque	Yes		
adjustable current limitation	Yes		
pump ramp down	Yes		
intrinsic device protection	Yes		
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor		
Thicker eventual protection	overload protection)		
 evaluation of thermistor motor protection 	Yes; Type A PTC or Klixon / Thermoclick		
• auto-RESET	Yes		
• manual RESET	Yes		
• remote reset	Yes; By turning off the control supply voltage		
• communication function	Yes		
 operating measured value display 	Yes; Only in conjunction with special accessories		
• error logbook	Yes; Only in conjunction with special accessories		
 via software parameterizable 	No		
 via software configurable 	Yes		
PROFlenergy	Yes; in connection with the PROFINET Standard communication module		
voltage ramp	Yes		
• torque control	No		
analog output	No		
Power Electronics			
operational current			
at 40 °C rated value	470 A		
at 50 °C rated value	416 A		
at 60 °C rated value	380 A		
operating voltage			
• rated value	200 480 V		
relative negative tolerance of the operating voltage	-15 %		
relative positive tolerance of the operating voltage	10 %		
operating power for 3-phase motors			
at 230 V at 40 °C rated value	132 kW		
at 400 V at 40 °C rated value	250 kW		
Operating frequency 1 rated value	50 Hz		
Operating frequency 2 rated value	60 Hz		
relative negative tolerance of the operating frequency	-10 %		
relative negative tolerance of the operating frequency	10 %		
adjustable motor current			
at rotary coding switch on switch position 1	200 A		
- at rotary county owner on owner position i			

 at rotary coding switch on switch position 2 	218 A		
 at rotary coding switch on switch position 3 	236 A		
 at rotary coding switch on switch position 4 	254 A		
 at rotary coding switch on switch position 5 	272 A		
 at rotary coding switch on switch position 6 	290 A		
 at rotary coding switch on switch position 7 	308 A		
at rotary coding switch on switch position 8	326 A		
at rotary coding switch on switch position 9	344 A		
at rotary coding switch on switch position 10 at rotary coding switch on switch position 10			
, ,	362 A		
at rotary coding switch on switch position 11	380 A		
at rotary coding switch on switch position 12	398 A		
 at rotary coding switch on switch position 13 	416 A		
 at rotary coding switch on switch position 14 	434 A		
 at rotary coding switch on switch position 15 	452 A		
 at rotary coding switch on switch position 16 	470 A		
• minimum	200 A		
minimum load [%]	15 %; Relative to smallest settable le		
power loss [W] for rated value of the current at AC			
 at 40 °C after startup 	56 W		
 at 50 °C after startup 	44 W		
at 60 °C after startup	37 W		
power loss [W] at AC at current limitation 350 %			
 at 40 °C during startup 	5 344 W		
 at 50 °C during startup 	4 438 W		
 at 60 °C during startup 	3 876 W		
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor		
Control circuit/ Control			
type of voltage of the control supply voltage	AC		
control supply voltage at AC			
• at 50 Hz	110 250 V		
● at 60 Hz	110 250 V		
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %		
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %		
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %		
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %		
control supply voltage frequency	50 60 Hz		
relative negative tolerance of the control supply voltage frequency	-10 %		
relative positive tolerance of the control supply voltage frequency	10 %		
control supply current in standby mode rated value	30 mA		
holding current in bypass operation rated value	105 mA		
inrush current by closing the bypass contacts maximum	2.2 A		
inrush current peak at application of control supply voltage maximum	12.2 A		
duration of inrush current peak at application of control supply	2.2 ms		
voltage			
design of the overvoltage protection	Varistor		
	Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply		
design of the overvoltage protection	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of		
design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of		
design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply		
design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply		
design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2		
design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)		
design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2		
design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 0		
design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)		

mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back		
fastening method			
fastening method height	screw fixing 230 mm		
width	230 mm		
depth	160 mm 282 mm		
required spacing with side-by-side mounting	EOE mill		
• forwards	10 mm		
backwards	0 mm		
• upwards	100 mm		
• downwards	75 mm		
• at the side	5 mm		
weight without packaging	7.3 kg		
connections/ Terminals			
type of electrical connection			
for main current circuit	busbar connection		
for control circuit	spring-loaded terminals		
width of connection bar maximum	35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm		
wire length for thermistor connection			
• with conductor cross-section = 0.5 mm² maximum	50 m		
• with conductor cross-section = 1.5 mm² maximum	150 m		
• with conductor cross-section = 2.5 mm² maximum	250 m		
type of connectable conductor cross-sections for main			
contacts for box terminal	05 0002		
using the front clamping point solid	95 300 mm²		
using the front clamping point finely stranded with core end processing	70 240 mm²		
 using the front clamping point finely stranded without core end processing 	70 240 mm²		
 using the front clamping point stranded 	95 300 mm²		
 using the back clamping point solid 	120 240 mm²		
 r box terminal using the back clamping point 	250 500 kcmil		
 using both clamping points solid 	min. 2x 70 mm², max. 2x 240 mm²		
 using both clamping points finely stranded with core end processing 	min. 2x 50 mm², max. 2x 185 mm²		
 using both clamping points finely stranded without core end processing 	min. 2x 50 mm², max. 2x 185 mm²		
 using both clamping points stranded 	min. 2x 70 mm², max. 2x 240 mm²		
 using the back clamping point finely stranded with core end processing 	120 185 mm²		
 using the back clamping point finely stranded without core end processing 	120 185 mm²		
using the back clamping point stranded	120 240 mm²		
type of connectable conductor cross-sections			
 for AWG cables for main current circuit solid 	2/0 500 kcmil		
 for DIN cable lug for main contacts stranded 	50 240 mm²		
 for DIN cable lug for main contacts finely stranded 	70 240 mm²		
type of connectable conductor cross-sections			
for control circuit solid	2x (0.25 1.5 mm²)		
• for control circuit finely stranded with core end processing	2x (0.25 1.5 mm²)		
for AWG cables for control circuit solid	2x (24 16)		
for AWG cables for control circuit finely stranded with core end processing	2x (24 16)		
wire length			
between soft starter and motor maximum	800 m		
at the digital inputs at AC maximum	1 000 m		
tightening torque	. 300.11		
	14 24 N·m		
for main contacts with screw-type terminals for auxiliary and control contacts with screw-type	14 24 N·III 0.8 1.2 N·m		
 for auxiliary and control contacts with screw-type terminals 	U.U 1.Z IV III		
tightening torque [lbf·in]			
for main contacts with screw-type terminals	124 210 lbf·in		
for auxiliary and control contacts with screw-type	7 10.3 lbf·in		

terminals			
Ambient conditions			
installation altitude at height above sea level maximum	5 000 m; derating as of 1000 m, see Manual		
ambient temperature			
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above		
during storage and transport	-40 +80 °C		
environmental category			
during operation according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6		
during storage according to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not ge inside the devices), 1M4		
 during transport according to IEC 60721 	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)		
Environmental footprint			
Siemens Eco Profile (SEP)	Siemens EcoTech		
EMC emitted interference	acc. to IEC 60947-4-2: Class A		
Communication/ Protocol			
communication module is supported			
PROFINET standard	Yes		
EtherNet/IP	Yes		
Modbus RTU	Yes		
Modbus TCP	Yes		
PROFIBUS	Yes		
UL/CSA ratings			
manufacturer's article number			
of the fuse			
 usable for Standard Faults up to 575/600 V according to UL 	Type: Class L, max. 1600 A; Iq = 30 kA		
— usable for High Faults up to 575/600 V according to UL	Type: Class L, max. 1200 A; Iq = 100 kA		
operating power [hp] for 3-phase motors			
• at 200/208 V at 50 °C rated value	150 hp		
• at 220/230 V at 50 °C rated value	150 hp		
• at 460/480 V at 50 °C rated value	350 hp		
Electrical Safety			
protection class IP on the front according to IEC 60529	IP00; IP20 with cover		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover		
ATEX			
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1		
PFHD with high demand rate according to IEC 61508 relating to ATEX	9E-6 1/h		
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.09		
hardware fault tolerance according to IEC 61508 relating to ATEX	0		
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a		
certificate of suitability			
• ATEX	Yes		
• IECEx	Yes		
• UKEX	Yes		
Approvals Certificates			

General Product Approval









Confirmation



General Product Approval	For use in hazardous locations	Test Certificates
--------------------------	--------------------------------	-------------------



<u>KC</u>





Miscellaneous

Type Test Certificates/Test Report

Marine / Shipping

other

Environment







Confirmation







Environment

Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5076-2TB14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5076-2TB14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-2TB14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5076-2TB14&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-2TB14/char


Characteristic: Installation altitude


 $\underline{\text{http://www.automation.siemens.com/bilddb/index.aspx?view=Search\&mlfb=3RW5076-2TB14\&objecttype=14\&gridview=view1}$

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

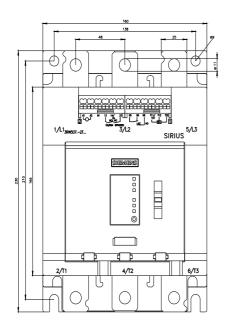

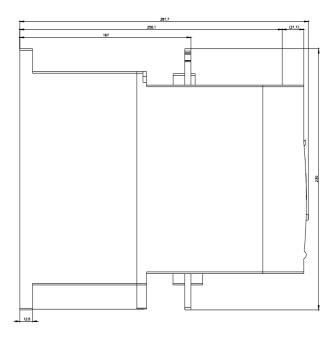

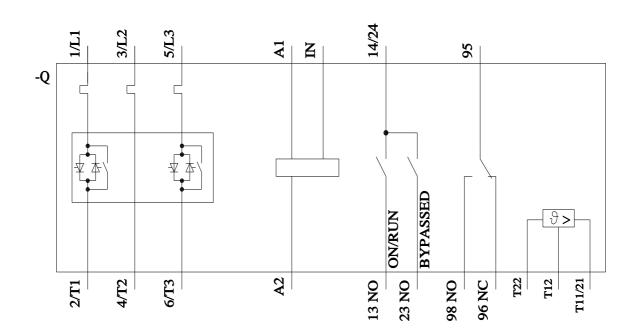

last modified: 4/19/2024 🖸

