

# IB IL 24 PSDO 8-PAC - Safety module



2985631

<https://www.phoenixcontact.com/in/products/2985631>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Safety-related digital output module, IP20 degree of protection, for SafetyBridge, INTERBUS-Safety, and PROFIsafe systems. The module has four safe digital outputs for two-channel assignment or eight safe digital outputs for single-channel assignment

## Product Description

The safety module is an output module from the Inline product range designed for use at any point within a SafetyBridge, INTERBUS-Safety or PROFIsafe system. The transmission speed of the safety module can be set to 500 kBaud or 2 Mbaud using a switch. One transmission speed must be used consistently within a station. The module has four safe digital outputs for two-channel assignment or eight digital outputs for single-channel assignment.

## Your advantages


- SIL 3 according to IEC 61508/EN 61508
- SIL 3 in accordance with EN 62061
- PL e in accordance with EN ISO 13849-1

## Commercial Data

Item number	2985631
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	DNA
Product Key	DNA431
Catalog Page	Page 267 (C-6-2019)
GTIN	4046356131605
Weight per Piece (including packing)	341 g
Weight per Piece (excluding packing)	245.6 g
Customs tariff number	85389091
Country of origin	DE

## Technical Data

### Dimensions

Dimensional drawing	
Width	48.8 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

### Interfaces

#### Inline local bus

No. of channels	2
Connection method	Inline data jumper
Transmission speed	500 kbps / 2 Mbps (can be switched)

### System properties

#### Module

ID code (dec.)	167
ID code (hex)	A7
Length code (hex)	04
Length code (dec)	04
Process data channel	8 Byte
Input address area	8 Byte ((Operating mode: SafetyBridge))
Output address area	8 Byte ((Operating mode: SafetyBridge))
Register length	8 Byte
Required parameter data	1 Byte ((Operating mode: SafetyBridge))
Required configuration data	5 Byte ((Operating mode: SafetyBridge))

### Output data

#### Digital

Output name	Digital outputs
Connection method	Spring-cage connection
Connection technology	2-, 3-conductor
Number of outputs	4 (for 2-channel assignment)
	8 (for 1-channel assignment)
	8

Protective circuit	Overload protection, short-circuit protection of outputs
Output voltage	24 V DC ( $U_S - 1$ V)
Output current	max. 6 A (Total current of all outputs, -25 °C ... 50 °C) max. 4 A (Total current of all outputs, >50 °C ... 55 °C)
Maximum output current per group	3 A
Maximum output current per channel	2 A
Maximum output current per module	3 A (See technical data)
Nominal output voltage	24 V DC
Nominal load, inductive	see safety data
Nominal load, lamp	see safety data
Nominal load, ohmic	see safety data
Behavior with inductive overload	Output can be destroyed

## Product properties

Type	modular
Product type	I/O component
Product family	Inline
Application	Functional safety
Diagnostics messages	Short-circuit or overload of the digital outputs Error message in diagnostics code (bus) and display by means of the LED on the motor

## Electrical properties

Maximum power dissipation for nominal condition	144 W
Transmission medium	Copper

### Potentials: Communications power ( $U_L$ )

Supply voltage	7.5 V DC (see safety data)
Current draw	max. 230 mA (see safety data)

### Potentials: Main circuit supply ( $U_M$ )

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 6.03 A typ. 30 mA (all outputs set including actuator current)

### Supply: Module electronics

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC

## Connection data

### Connection technology

Connection name	Inline connector
pluggable	yes

### Conductor connection

# IB IL 24 PSDO 8-PAC - Safety module



2985631

<https://www.phoenixcontact.com/in/products/2985631>

Connection method	Spring-cage connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 16

## Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section, flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 16

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	80 kPa ... 108 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (up to 3500 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	10 % ... 85 % (Take suitable measures against increased air humidity within the permitted temperature range.)
Permissible humidity (storage/transport)	10 % ... 85 % (Take suitable measures against increased air humidity within the permitted temperature range.)

## Standards and regulations


Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------

Drawings

Connection diagram

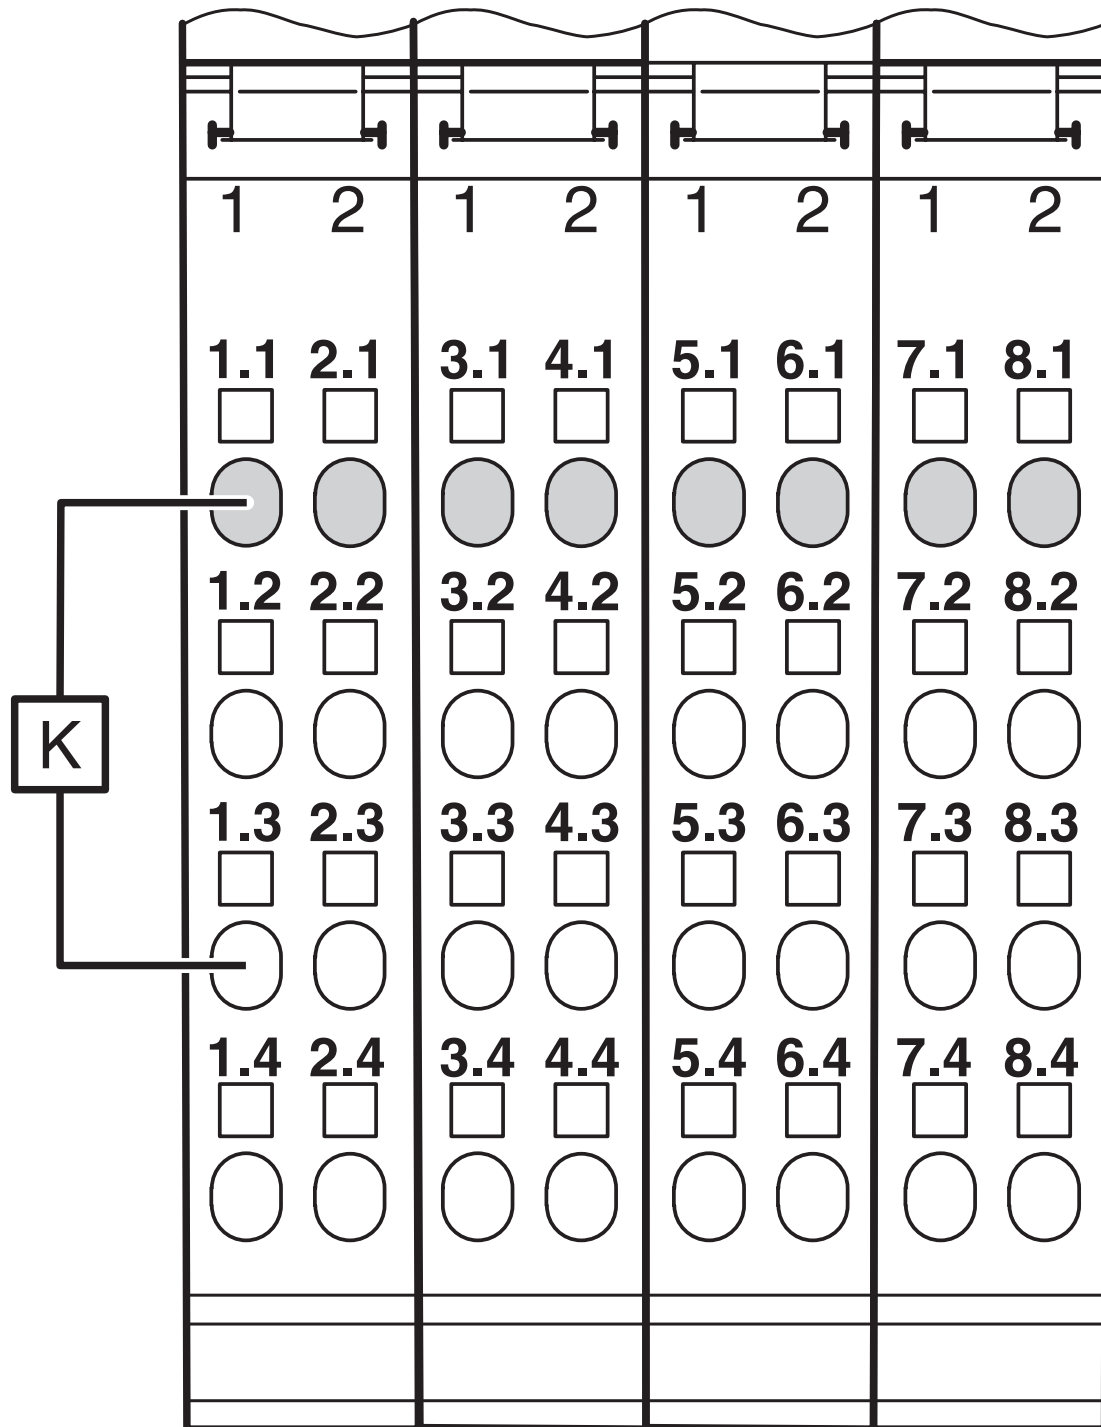


Example connection of a contactor

# IB IL 24 PSDO 8-PAC - Safety module

2985631

<https://www.phoenixcontact.com/in/products/2985631>

Dimensional drawing

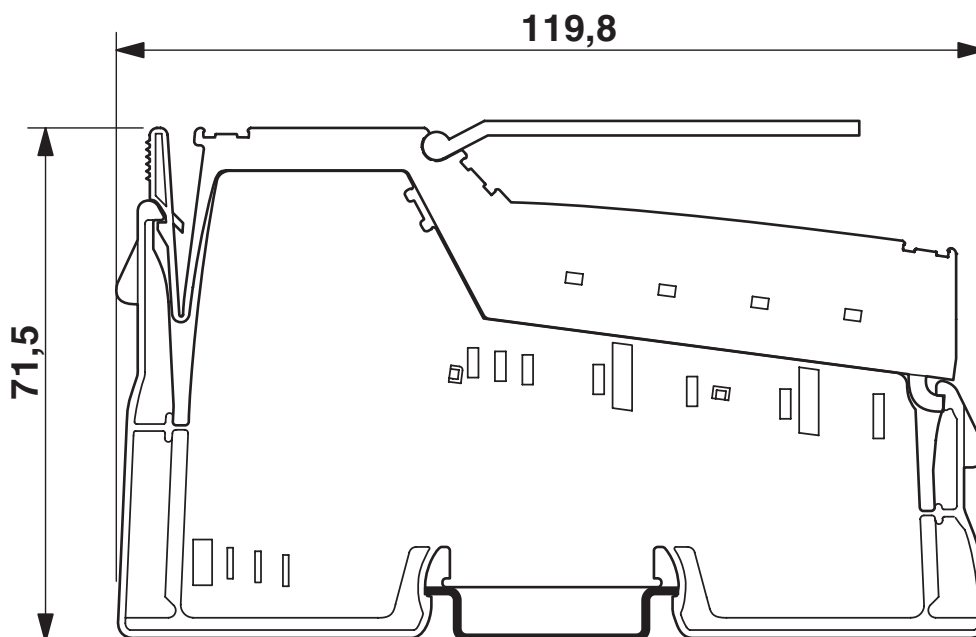

Dimensions (in mm)


# IB IL 24 PSDO 8-PAC - Safety module





2985631

<https://www.phoenixcontact.com/in/products/2985631>


## Approvals

 **UL Listed**  
Approval ID: FILE E 140324

 **cUL Listed**  
Approval ID: FILE E 140324

 **Functional Safety**  
Approval ID: 968/FSP 2449.00/22

 **Functional Safety**  
Approval ID: 968/EZ 650.04/20

 **Functional Safety**  
Approval ID: 968/EZ 650.04/20

2985631

<https://www.phoenixcontact.com/in/products/2985631>

## Classifications

### ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

### ETIM

ETIM 8.0	EC001599
----------	----------

### UNSPSC

UNSPSC 21.0	32151600
-------------	----------



# IB IL 24 PSDO 8-PAC - Safety module



2985631

<https://www.phoenixcontact.com/in/products/2985631>

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

# IB IL 24 PSDO 8-PAC - Safety module

2985631

<https://www.phoenixcontact.com/in/products/2985631>



## Accessories

### IB IL 24 SDO 8-PLSET/CP - Connector set

2916927

<https://www.phoenixcontact.com/in/products/2916927>

Connector set (yellow), color coded, for safe SDO boards.



---

### IB IL FIELD 2 - Labeling field

2727501

<https://www.phoenixcontact.com/in/products/2727501>

Labeling field, width: 12.2 mm



# IB IL 24 PSDO 8-PAC - Safety module

2985631

<https://www.phoenixcontact.com/in/products/2985631>



## IB IL FIELD 8 - Labeling field

2727515

<https://www.phoenixcontact.com/in/products/2727515>

Labeling field, width: 48.8 mm



---

## ESL 62X10 - Insert strip

0809492

<https://www.phoenixcontact.com/in/products/0809492>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems:  
Laser printer, mounting type: insert, lettering field size: 62 x 10 mm, Number of  
individual labels: 72



# IB IL 24 PSDO 8-PAC - Safety module

2985631

<https://www.phoenixcontact.com/in/products/2985631>



## ESL 62X46 - Insert strip

0809502

<https://www.phoenixcontact.com/in/products/0809502>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems: Laser printer, mounting type: insert, lettering field size: 62 x 46 mm, Number of individual labels: 15



---

## PSR-FTB/20/86 - Filter terminal block

2904477

<https://www.phoenixcontact.com/in/products/2904477>

Terminal block for filtering test pulses from safe semiconductor outputs with adjustable filter values (20  $\mu$ F/86  $\mu$ F), as well as for EMC filtering of 24 V signals up to an amperage of 2 A.



# IB IL 24 PSDO 8-PAC - Safety module

2985631

<https://www.phoenixcontact.com/in/products/2985631>



## PSR-FTB/1.5/11.5 - Filter terminal block

2904476

<https://www.phoenixcontact.com/in/products/2904476>



Terminal block for filtering test pulses from safe semiconductor outputs with adjustable filter values (1.5  $\mu$ F/11.5  $\mu$ F), as well as for EMC filtering of 24 V signals up to an amperage of 2 A.

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)