

# UK 6-FSI/C - Fuse modular terminal block



3118203

<https://www.phoenixcontact.com/in/products/3118203>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Flat, fuse type: C, nom. voltage: 250 V, nominal current: 30 A, number of positions: 1, connection method: Screw connection, 1 level, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 10 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, NS 32, color: black

## Your advantages

- Can be bridged with FBI ... fixed bridge
- For the use of KFZ flat-type fuses from the FSI/C series

## Commercial data

Item number	3118203
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE1
Product key	BE1236
Catalog page	Page 499 (C-1-2019)
GTIN	4017918100605
Weight per piece (including packing)	20.79 g
Weight per piece (excluding packing)	19.5 g
Customs tariff number	85369095
Country of origin	TR

# UK 6-FSI/C - Fuse modular terminal block



3118203

<https://www.phoenixcontact.com/in/products/3118203>

## Technical data

### Notes

#### General

Note	The current is determined by the fuse used, the voltage by the fuse or selected light indicator.
------	--

### Product properties

Product type	Fuse terminal block
Number of positions	1
Number of connections	2
Number of rows	1
Potentials	1

#### Data management status

Article revision	17
------------------	----

#### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Fuse type	Flat
Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	1.31 W
Fuse	C
Maximum current with single arrangement	30 A (special arrangements on request)

### Connection data

Number of connections per level	2
Nominal cross section	6 mm <sup>2</sup>

#### 1 level

Screw thread	M4
Tightening torque	1.5 ... 1.6 Nm
Stripping length	10 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Cross section AWG	24 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	24 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with same cross section, solid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>

# UK 6-FSI/C - Fuse modular terminal block



3118203

<https://www.phoenixcontact.com/in/products/3118203>

2 conductors with same cross section, flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Nominal current	30 A
Maximum load current	30 A
Nominal voltage	250 V
Nominal cross section	4 mm <sup>2</sup>

## Dimensions

Width	8.2 mm
Height	64 mm
Depth	52.6 mm
Depth on NS 32	58.8 mm
Depth on NS 35/7,5	53.8 mm
Depth on NS 35/15	61.3 mm

## Material specifications

Color	black (RAL 9005)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Environmental and real-life conditions

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	0.964 (m/s <sup>2</sup> )/Hz
Acceleration	0.58g

# UK 6-FSI/C - Fuse modular terminal block



3118203

<https://www.phoenixcontact.com/in/products/3118203>

Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

## Shocks

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

## Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

# UK 6-FSI/C - Fuse modular terminal block




3118203

<https://www.phoenixcontact.com/in/products/3118203>

## Drawings

Diagram

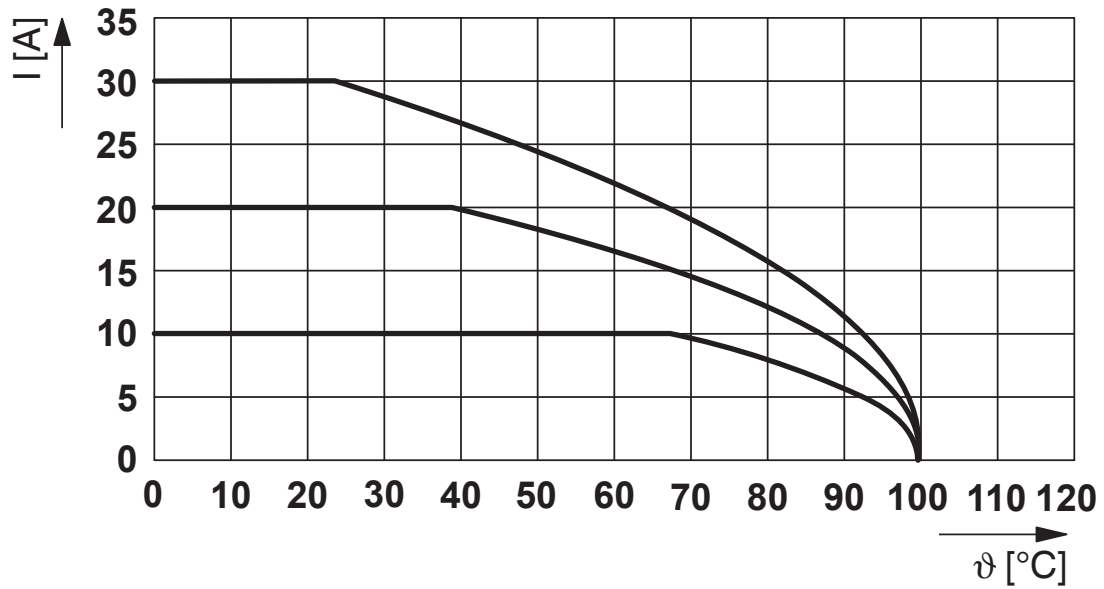


# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



Circuit diagram

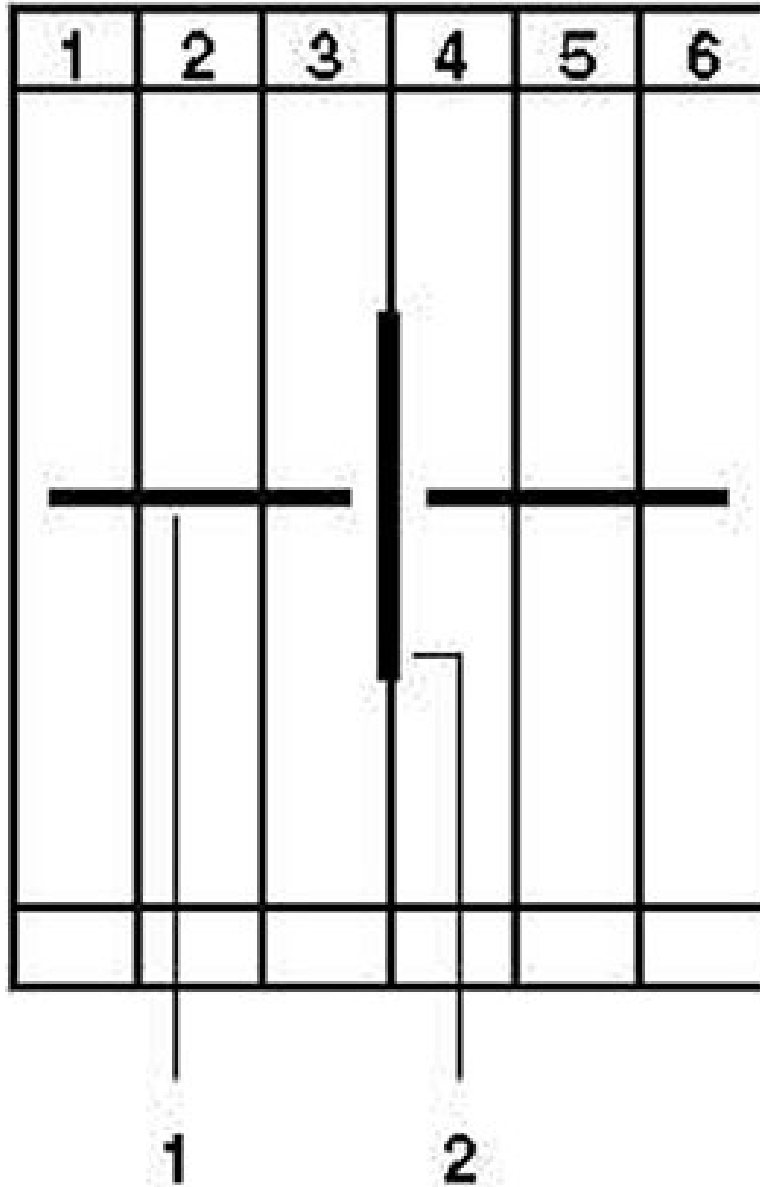


# UK 6-FSI/C - Fuse modular terminal block



3118203

<https://www.phoenixcontact.com/in/products/3118203>

Circuit diagram

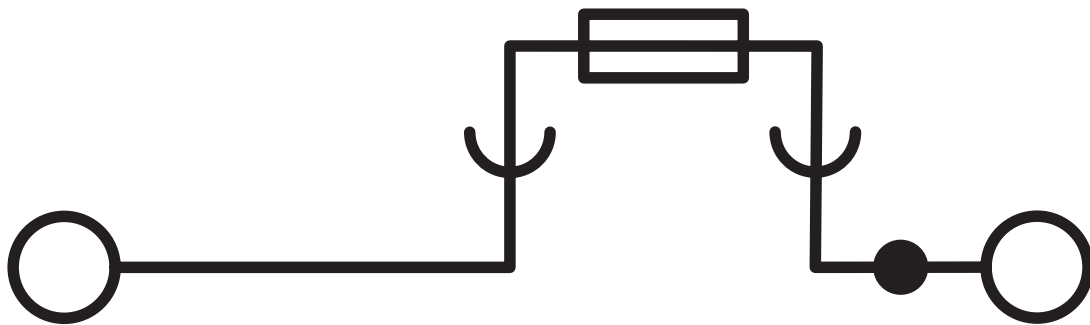

# UK 6-FSI/C - Fuse modular terminal block





3118203


<https://www.phoenixcontact.com/in/products/3118203>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/3118203>

 <b>CSA</b> Approval ID: 13631				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	32 V	30 A	26 - 8	-

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

 <b>cULus Recognized</b> Approval ID: E60425				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B	300 V	30 A	26 - 8	-
Use group C	300 V	30 A	26 - 8	-
Use group F	250 V	30 A	26 - 8	-
Use group D	600 V	5 A	26 - 8	-



# UK 6-FSI/C - Fuse modular terminal block



3118203

<https://www.phoenixcontact.com/in/products/3118203>

## Classifications

### ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

### ETIM

ETIM 9.0	EC000899
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# UK 6-FSI/C - Fuse modular terminal block



3118203

<https://www.phoenixcontact.com/in/products/3118203>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	c78f7ade-a28f-471b-b2c9-b7e27715dc57

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## Accessories

 Note: Applying some accessories below might limit this product.


### FBI 2- 8 - Fixed bridge

0200020

<https://www.phoenixcontact.com/in/products/0200020>



Fixed bridge, pitch: 8 mm, number of positions: 2, color: silver

 Max. current carrying capacity: 34 A

---

### FBI 3- 8 - Fixed bridge

0200059

<https://www.phoenixcontact.com/in/products/0200059>



Fixed bridge, pitch: 8 mm, number of positions: 3, color: silver

 Max. current carrying capacity: 34 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>


## FBI 4- 8 - Fixed bridge

0200046

<https://www.phoenixcontact.com/in/products/0200046>



Fixed bridge, pitch: 8 mm, number of positions: 4, color: silver

 Max. current carrying capacity: 34 A

---


## FBI 10- 8 - Fixed bridge

0203263

<https://www.phoenixcontact.com/in/products/0203263>



Fixed bridge, pitch: 8 mm, number of positions: 10, color: silver

 Max. current carrying capacity: 34 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>


## EB 2- 8 - Insertion bridge

0202154

<https://www.phoenixcontact.com/in/products/0202154>



Insertion bridge, pitch: 8 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 57 A

---

## EB 3- 8 - Insertion bridge

0202141

<https://www.phoenixcontact.com/in/products/0202141>



Insertion bridge, pitch: 8 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 57 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## EB 10- 8 - Insertion bridge

0202138

<https://www.phoenixcontact.com/in/products/0202138>



Insertion bridge, pitch: 8 mm, number of positions: 10, color: gray

 Max. current carrying capacity: 57 A

---


## ISSBI 10- 8 - Bridge

0301534

<https://www.phoenixcontact.com/in/products/0301534>



Bridge, pitch: 8 mm, number of positions: 10, color: silver

 Max. current carrying capacity: 38 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>


## EB 4- 8 - Insertion bridge

0202142

<https://www.phoenixcontact.com/in/products/0202142>

Insertion bridge, pitch: 8 mm, number of positions: 4, color: gray



 Max. current carrying capacity: 41 A

---


## EB 1/3/5/7-8 - Insertion bridge

3072340

<https://www.phoenixcontact.com/in/products/3072340>

Insertion bridge, pitch: 16.4 mm, number of positions: 4, pin assignment: 1, 3, 5, 7, length: 24 mm, color: gray



 Max. current carrying capacity: 41 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>


## EB 1/3/5-8 - Insertion bridge

3072341

<https://www.phoenixcontact.com/in/products/3072341>



Insertion bridge, pitch: 16.4 mm, number of positions: 3, pin assignment: 1,3,5, length: 24 mm, color: gray

 Max. current carrying capacity: 41 A

---

## TS-KK 3 - Separating plate

2770215

<https://www.phoenixcontact.com/in/products/2770215>



Separating plate, depth: 16 mm, width: 0.5 mm, height: 14 mm, color: gray



# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## SBS 8:UNBEDRUCKT - Marker card

1007235

<https://www.phoenixcontact.com/in/products/1007235>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm

---

## TCP 0,1A - Thermal device circuit breaker

0712107

<https://www.phoenixcontact.com/in/products/0712107>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 0.1 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## TCP 0,25A - Thermal device circuit breaker

0712123

<https://www.phoenixcontact.com/in/products/0712123>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 0.25 A

---

## TCP 0,5A - Thermal device circuit breaker

0712152

<https://www.phoenixcontact.com/in/products/0712152>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 0.5 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## TCP 1A - Thermal device circuit breaker

0712194

<https://www.phoenixcontact.com/in/products/0712194>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 1 A

---

## TCP 2A - Thermal device circuit breaker

0712217

<https://www.phoenixcontact.com/in/products/0712217>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 2 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## TCP 3A - Thermal device circuit breaker

0712233

<https://www.phoenixcontact.com/in/products/0712233>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 3 A

---

## TCP 4A - Thermal device circuit breaker

0712259

<https://www.phoenixcontact.com/in/products/0712259>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 4 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## TCP 6A - Thermal device circuit breaker

0712275

<https://www.phoenixcontact.com/in/products/0712275>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 6 A

---

## TCP 8A - Thermal device circuit breaker

0712291

<https://www.phoenixcontact.com/in/products/0712291>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 8 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## TCP 10A - Thermal device circuit breaker

0712314

<https://www.phoenixcontact.com/in/products/0712314>



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 10 A

---

## TCP 32DC/5A M - Thermal device circuit breaker

1499963

<https://www.phoenixcontact.com/in/products/1499963>



1-channel thermal device circuit breaker for protecting loads up to 32 V DC in the event of an overload. Fuse type: slow-blow. Can be plugged onto fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 5 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## TCP 32DC/6A M - Thermal device circuit breaker

1499965

<https://www.phoenixcontact.com/in/products/1499965>



1-channel thermal device circuit breaker for protecting loads up to 32 V DC in the event of an overload. Fuse type: slow-blow. Can be plugged onto fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 6 A

---

## TCP 32DC/7,5A M - Thermal device circuit breaker

1499966

<https://www.phoenixcontact.com/in/products/1499966>



1-channel thermal device circuit breaker for protecting loads up to 32 V DC in the event of an overload. Fuse type: slow-blow. Can be plugged onto fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 7.5 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## TCP 32DC/10A M - Thermal device circuit breaker

1499967

<https://www.phoenixcontact.com/in/products/1499967>



1-channel thermal device circuit breaker for protecting loads up to 32 V DC in the event of an overload. Fuse type: slow-blow. Can be plugged onto fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 10 A

---

## TCP 32DC/15A M - Thermal device circuit breaker

1499968

<https://www.phoenixcontact.com/in/products/1499968>



1-channel thermal device circuit breaker for protecting loads up to 32 V DC in the event of an overload. Fuse type: slow-blow. Can be plugged onto fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 15 A



# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## TCP 32DC/20A M - Thermal device circuit breaker

1499969

<https://www.phoenixcontact.com/in/products/1499969>



1-channel thermal device circuit breaker for protecting loads up to 32 V DC in the event of an overload. Fuse type: slow-blow. Can be plugged onto fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 20 A

---

## TCP 32DC/25A M - Thermal device circuit breaker

1499972

<https://www.phoenixcontact.com/in/products/1499972>



1-channel thermal device circuit breaker for protecting loads up to 32 V DC in the event of an overload. Fuse type: slow-blow. Can be plugged onto fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 25 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## TCP 32DC/30A M - Thermal device circuit breaker

1499987

<https://www.phoenixcontact.com/in/products/1499987>



1-channel thermal device circuit breaker for protecting loads up to 32 V DC in the event of an overload. Fuse type: slow-blow. Can be plugged onto fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 30 A

---

## NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/in/products/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/in/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

---

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/in/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/in/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/in/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/in/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/in/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/in/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/in/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/in/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/in/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/in/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/in/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/in/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

---

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/in/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/in/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/in/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/in/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/in/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/in/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



---

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/in/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/in/products/1052002>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/in/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

## UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



### UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/in/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

---

### UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/in/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/in/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

---

## UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/in/products/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

# UK 6-FSI/C - Fuse modular terminal block



3118203

<https://www.phoenixcontact.com/in/products/3118203>

## ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/in/products/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

---

## ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/in/products/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10



# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/in/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/in/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/in/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/in/products/0800886>



End clamp, width: 9.5 mm, color: gray

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## E/UK - End bracket

1201442

<https://www.phoenixcontact.com/in/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



---

## E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/in/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## SI FORM C 15 A DIN 72581 - Fuse

0913676

<https://www.phoenixcontact.com/in/products/0913676>



Flat-type plug-in fuse, type C, color code: light blue, nominal current: 15 A

---

## SI FORM C 2 A - Fuse

0913689

<https://www.phoenixcontact.com/in/products/0913689>



Flat-type plug-in fuse, type C, color code: gray, nominal current: 2 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## SI FORM C 7,5 A DIN 72581 - Fuse

0913702

<https://www.phoenixcontact.com/in/products/0913702>



Flat-type plug-in fuse, type C, color code: brown, nominal current: 7.5 A

---

## SI FORM C 20 A DIN 72581 - Fuse

0913744

<https://www.phoenixcontact.com/in/products/0913744>



Flat-type plug-in fuse, type C, color code: yellow, nominal current: 20 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## SI FORM C 4 A DIN 72581 - Fuse

0913731

<https://www.phoenixcontact.com/in/products/0913731>



Flat-type plug-in fuse, type C, color code: pink, nominal current: 4 A

---

## SI FORM C 3 A DIN 72581 - Fuse

0913773

<https://www.phoenixcontact.com/in/products/0913773>



Flat-type plug-in fuse, type C, color code: violet, nominal current: 3 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## SI FORM C 30 A DIN 72581 - Fuse

0913760

<https://www.phoenixcontact.com/in/products/0913760>



Flat-type plug-in fuse, type C, color code: light green, nominal current: 30 A

---

## SI FORM C 25 A DIN 72581 - Fuse

0913757

<https://www.phoenixcontact.com/in/products/0913757>



Flat-type plug-in fuse, type C, color code: white, nominal current: 25 A

# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>

## SI FORM C 10 A DIN 72581 - Fuse

0913715

<https://www.phoenixcontact.com/in/products/0913715>



Flat-type plug-in fuse, type C, color code: red, nominal current: 10 A

---

## SI FORM C 5 A DIN 72581 - Fuse

0913692

<https://www.phoenixcontact.com/in/products/0913692>



Flat-type plug-in fuse, type C, color code: light brown, nominal current: 5 A



# UK 6-FSI/C - Fuse modular terminal block

3118203

<https://www.phoenixcontact.com/in/products/3118203>



## SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/in/products/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)