


PNOZpe2p Bus-Interface

779125

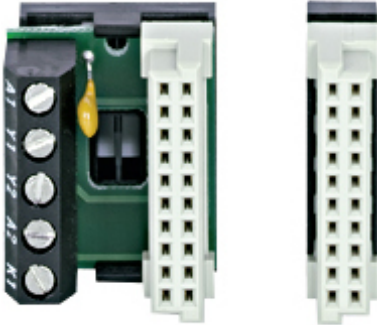

Interface PNOZpower for externally connecting to PNOZsigma, PNOZ X, PNOZmulti, PNOZelog, PSS and SafetyBUSp.

Technical details

| | |
|---------------------------------|---|
| General data | |
| Approval: | CE, UKCA, cULus Listed, TÜV, EAC (Eurasian) |
| Technical data | |
| Electrical data | |
| Supply voltage (V): | 24 - 24 V |
| Type of supply voltage U1: | DC |
| Inputs | |
| Number of inputs: | 1 |
| Environmental data | |
| Climatic suitability to ...: | EN 60068-2-78 |
| Ambient temperature: | -10 - 55 °C |
| Humidity rating: | 93 % r. h. at 40 °C |
| Condensation permitted?: | Not permitted |
| EMC to standard ...: | EN 60947-5-1, EN 61000-6-2, EN 61326-3-1 |
| Vibration to standard ...: | EN 60068-2-6 |
| Clearance & creepage dist. to: | EN 60947-1 |
| Overvoltage category: | III |
| Pollution degree clear.&creep.: | 2 |
| Mechanical data | |
| Mounting position: | horizontal on top hat rail |

| | |
|--------------------------------|------------------------------|
| Connection terminal: | Screw terminal |
| Terminal style: | fixed |
| Flex. cond. c/s AWG info: | 28 - 14 AWG |
| Height dimension: | 29 mm |
| Width dimension: | 23.5 mm |
| Depth dimension: | 22.5 mm |
| Net weight: | 15 g |
| Gross weight: | 27 g |
| Environment | |
| WEEE classification (08/2018): | 5 devices (feed size < 50cm) |
| Commercial data | |
| Harmonized System Code: | 85366990 |
| UNSPSC 25: | 39122331 |
| EAN-Code: | 4046548009088 |
| ECLASS version: | ECLASS-13 |
| ECLASS Reference Feature: | 27379101 |
| ETIM Version: | ETIM-9.0 |
| ETIM Reference Group: | EG000017 |
| ETIM Reference Feature: | EC002498 |
| Volume: | 0.420 dm ³ |