



Digital monitoring relay cos phi and current monitoring from 90-690 V AC Overshoot and undershoot self-supplied 50 to 60 Hz AC Noise pulses delay 0.1 to 20 s Hysteresis for (I) 0.1 to 2 A 2 change-over contacts with or without fault buffer spring-type connection system

product brand name	SIRIUS
product designation	Cos phi monitoring relay with digital setting
product type designation	3UG4
<b>General technical data</b>	
product function	Active power monitoring relay
design of the display	LCD
insulation voltage for overvoltage category III according to IEC 60664	
• with degree of pollution 3 rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 kV
protection class IP	IP20
shock resistance according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
vibration resistance according to IEC 60068-2-6	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
thermal current of the switching element with contacts maximum	5 A
reference code according to IEC 81346-2	K
relative repeat accuracy	1 %
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
<b>Product Function</b>	
product function	
• overcurrent detection 1 phase	Yes
• undercurrent detection 1 phase	Yes
• adjustable open/closed-circuit current principle	Yes
• external reset	Yes
<b>Control circuit/ Control</b>	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	90 ... 690 V
• at 60 Hz rated value	90 ... 690 V
supply voltage frequency for auxiliary and control circuit rated value	50 ... 60 Hz
operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	1
• full-scale value	1
operating range factor control supply voltage rated value at	

<b>AC at 60 Hz</b>	
• initial value	1
• full-scale value	1
<b>Supply voltage</b>	
supply voltage frequency rated value	60 ... 50 Hz
<b>Measuring circuit</b>	
<b>type of current for monitoring</b>	AC
<b>measurable current</b>	0.2 ... 10 A
<b>adjustable current response value current</b>	
• 1	0.2 ... 10 A
• 2	0.2 ... 10 A
<b>adjustable response delay time</b>	
• when starting	0 ... 99 s
• with lower or upper limit violation	0.1 ... 20 s
<b>adjustable switching hysteresis for measured current value</b>	100 ... 2 000 mA
<b>buffering time in the event of power failure minimum</b>	10 ms
<b>accuracy of digital display</b>	+/-1 digit
<b>Precision</b>	
<b>relative metering precision</b>	10 %
<b>Auxiliary circuit</b>	
<b>control supply voltage rated value</b>	690 ... 90
number of NC contacts delayed switching	0
number of NO contacts delayed switching	0
number of CO contacts delayed switching	2
<b>operating frequency with 3RT2 contactor maximum</b>	5 000 1/h
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	2
operating voltage rated value	90 ... 690 V
<b>ampacity of the output relay at AC-15</b>	
• at 250 V at 50/60 Hz	3 A
• at 400 V at 50/60 Hz	3 A
<b>ampacity of the output relay at DC-13</b>	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
<b>operational current at 17 V minimum</b>	5 mA
<b>continuous current of the DIAZED fuse link of the output relay</b>	4 A
<b>Electromagnetic compatibility</b>	
<b>conducted interference</b>	
• due to burst according to IEC 61000-4-4	2 kV
• due to conductor-earth surge according to IEC 61000-4-5	2 kV
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>Galvanic isolation</b>	
<b>galvanic isolation</b>	
• between input and output	Yes
• between the outputs	Yes
• between the voltage supply and other circuits	Yes
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of electrical connection</b>	spring-loaded terminals
<b>type of connectable conductor cross-sections</b>	
• solid	2x (0.25 ... 1.5 mm <sup>2</sup> )
• finely stranded with core end processing	2 x (0.25 ... 1.5 mm <sup>2</sup> )
• finely stranded without core end processing	2x (0.25 ... 1.5 mm <sup>2</sup> )
• for AWG cables solid	2x (24 ... 16)
• for AWG cables stranded	2x (24 ... 16)

<b>connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>	<p>0.25 ... 1.5 mm<sup>2</sup></p> <p>0.25 ... 1.5 mm<sup>2</sup></p> <p>0.25 ... 1.5 mm<sup>2</sup></p>
<b>AWG number as coded connectable conductor cross section</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> </ul>	<p>24 ... 16</p> <p>24 ... 16</p>

**Installation/ mounting/ dimensions**

<b>mounting position</b>	any
<b>fastening method</b>	snap-on mounting
<b>height</b>	103 mm
<b>width</b>	22.5 mm
<b>depth</b>	91 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul>	<p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p>

**Ambient conditions**

installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	<p>-25 ... +60 °C</p> <p>-40 ... +85 °C</p> <p>-40 ... +85 °C</p>

**Approvals Certificates**

**General Product Approval**



[Confirmation](#)



**EMV      Test Certificates      Marine / Shipping**



[KC](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



**other      Railway      Environment**

[Confirmation](#)

[Special Test Certificate](#)

[Environmental Conformations](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4641-2CS20>

### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4641-2CS20>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UG4641-2CS20>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG4641-2CS20&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4641-2CS20&lang=en)

### Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4641-2CS20/manual>

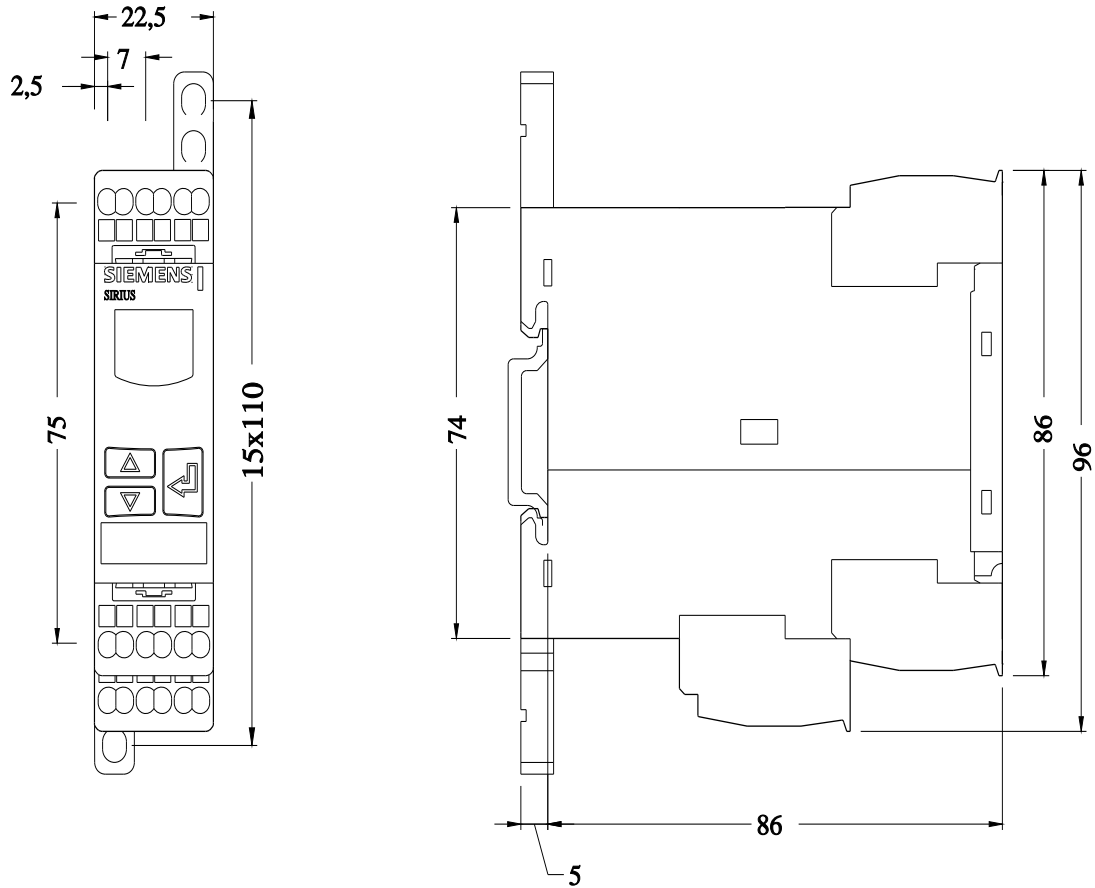

last modified:

3/11/2024 