


## Data Sheet | Item Number: 2787-2157

Power supply; Pro 2; 1-phase; 48 VDC output voltage; 10 A output current; Top-Boost + PowerBoost; communication capability

<https://www.wago.com/2787-2157>

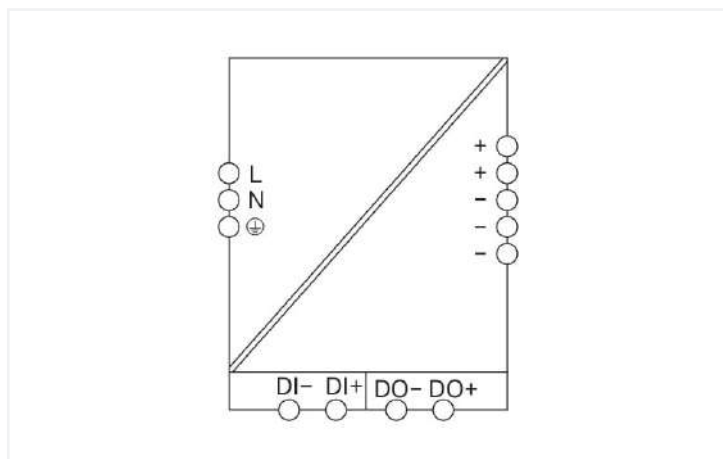

### Features:

- Power supply with TopBoost, PowerBoost and configurable overload behavior
- Configurable digital signal input and output, optical status indication, function keys
- Communication interface for configuration and monitoring
- Optional connection to IO-Link, EtherNet/IP™, Modbus TCP or Modbus RTU
- Suitable for both parallel and series operation
- Natural convection cooling when horizontally mounted
- Pluggable connection technology
- Electrically isolated output voltage (SELV/PELV) per EN 61010-2-201/UL 61010-2-201
- Marker slot for WAGO marking cards (WMB) and WAGO marking strips

### Technical data

#### Input

Phases	1
Nominal input voltage $U_{i\text{nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 90 ... 264 V; DC 130 ... 240 V
Nominal mains frequency range	50 ... 60 Hz
Input current $I_i$	≤ 5.9 A (240 VAC; nominal load)
Inrush current	≤ 12 A (after 1 ms)
Power factor correction (PFC)	active
Mains failure hold-up time	≥ 24 ms (230 VAC)

#### Output

Nominal output voltage $U_{o\text{nom}}$	DC 48 V (SELV)
Output voltage range	DC 48 ... 56 V (adjustable)
Default setting	DC 48 V
Nominal output current $I_{o\text{nom}}$	10 A (48 VDC)
Nominal output power	480 W
Deviation	≤ 1 %
Residual ripple	≤ 70 mV (peak-to-peak)
Current limitation	1.1 x $I_{o\text{nom}}$ (typ.)
Overload behavior	TopBoost/PowerBoost/Time-limited constant current mode (other overload behaviors can be set)

### Output

PowerBoost	DC 15 A (5 s)
TopBoost	Up to 600 %

### Signaling and communication

Signaling	Optical status indication (DC OK; load; warning and error states) Digital signal input and output (DI/DO)
Communication	USB (Communication Cable 750-923) Ethernet/IP (Communication Module 2789-9023) IO-Link (Communication Module 2789-9080) Modbus RTU (Communication Module 2789-9015) Modbus TCP (Communication Module 2789-9052)

### Efficiency/power losses

Power loss $P_1$	$\leq 1.3$ W (standby); $\leq 2.6$ W (no load); $\leq 24$ W (230 VAC; nominal load)
Efficiency (typ.)	95.3 %

### Circuit protection

Internal fuse	T 10 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	16 A (for USA/Canada: 15 A)

### Safety and protection

Isolation voltage (pri.-sec., AC)	3510 V
Isolation voltage (pri.-PE, AC)	2200 V
Isolation voltage (sec.-PE)	DC 0.5 kV
Isolation voltage (sec.-signal)	DC 0.5 kV
Protection class	I
Protection type	IP20; per EN 60529
Overvoltage category	III ( $\leq 2000$ m a.s.l.); II ( $> 2000$ m a.s.l.)
Pollution degree	2
Transient suppression (primary)	Yes
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	$> 800,000$ h (per IEC 61709)

### Connection data

Connection type 1	Input/output/signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 721 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	2.5 ... 1.5 mm <sup>2</sup> / 12 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	1.5 ... 0.08 mm <sup>2</sup> / 16 ... 28 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

### Physical data

Width	70 mm / 2.756 inches
Height	130 mm / 5.118 inches
Depth from upper-edge of DIN-rail	130 mm / 5.118 inches
Note (dimensions)	Height without connector Height with connector: 166 mm

### Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

### Material data

Fire load	0 MJ
Weight	1450 g

### Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	See instruction leaflet
Operating altitude (max.)	5000 m

### Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 61010-1 UL 61010-2-201 SEMI F47

### Commercial data

ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Country of origin	CN
GTIN	4066966121391
Customs tariff number	85044083900

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 61010-2-201	E255817

#### Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for hazardous areas



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	UL 121201	E198726

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 2787-2157 <a href="#">↓</a>

Documentation

Manual
Product Manual Power supply; Pro 2; 1-phase; 48 VDC output voltage; 10 A output current; V 1.0.2 18.02.2022 pdf 8365.79 KB <a href="#">↓</a>

Bid Text			
2787-2157	11.05.2022	xml 8.80 KB	<a href="#">↓</a>
2787-2157	11.05.2022	docx 32.55 KB	<a href="#">↓</a>

Instruction Leaflet
Power supply; Pro 2; 1-phase; 48 VDC output voltage; 10 A output current; V 1.0.0 03.05.2021 pdf 4328.65 KB <a href="#">↓</a>

Runtime Software

Firmware
2787-2157, Stromversorgung; Pro 2 V 010513 15.10.2021 zip 987.09 KB <a href="#">↓</a>

1 Compatible Products

1.1 Optional Accessories

1.1.1 Communication

### 1.1.1.1 Communication module



**Item No.: 2789-9023**

Communication module; EtherNet/IP; communication capability

**Item No.: 2789-9080**

Communication module; IO-Link; communication capability

**Item No.: 2789-9015**

Communication module; Modbus RTU; RJ45; communication capability

**Item No.: 2789-9052**

Communication module; Modbus TCP; communication capability

### 1.1.2 Marking

#### 1.1.2.1 Marker carrier



**Item No.: 2789-1233**

Marker carrier; for WMB or marking strips; Length: 33 mm