
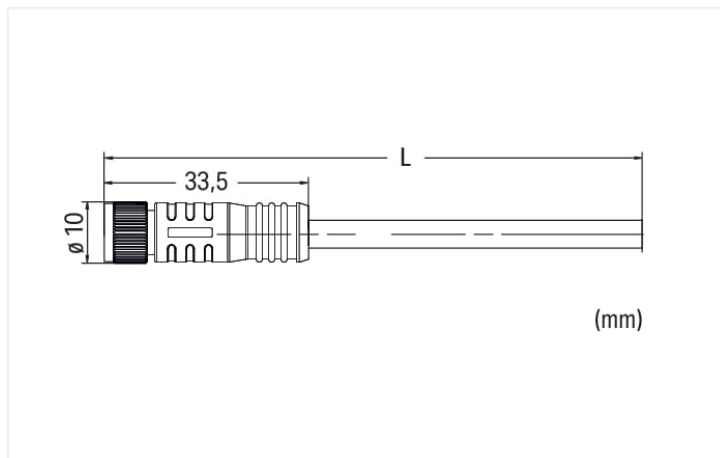


Similar to illustration

Pin 1 ... 4: 0.25 mm<sup>2</sup>

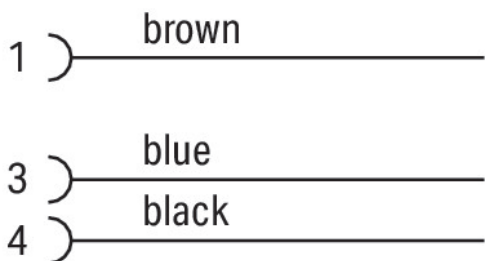

**Technical data**

**General information**

|   |                |
|---|----------------|
| Operating voltage                         | 300 VDC        |
| Protection type                           | IP67           |
| Ambient (operating) temperature (static)  | -40 ... +80 °C |
| Ambient (operating) temperature (dynamic) | -20 ... +60 °C |

**Cable**

|                         |        |
|-------------------------|--------|
| Cable length            | 15 m   |
| Sheathed cable color    | black  |
| Sheathed cable diameter | 3.5 mm |

**Connector**

|  |                      |
|--|----------------------|
| Connection type                                | M8 socket - free end |
| Pole number                                    | 3                    |
| Cable connection direction to mating direction | 0°                   |



**Commercial data**

|                       |               |
|-----------------------|---------------|
| PU (SPU)              | 1 pcs         |
| Country of origin     | CN            |
| GTIN                  | 4066966504095 |
| Customs tariff number | 85444290900   |

**Environmental Product Compliance**

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

**Downloads**

**Environmental Product Compliance**

|  |
|--|
| <b>Compliance Search</b>   |
| Environmental Product Compliance<br>756-6101/030-150  |