

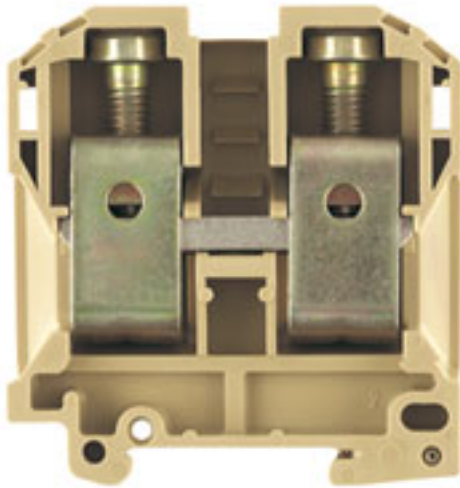
SAK 70/35**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

General ordering data

Version	Feed-through terminal block, Screw connection, beige / yellow, 70 mm ² , 192 A, 1000 V, Number of connections: 2, Number of levels: 1, TS 35, V-2, PA 66, 100 °C
Order No.	0139160000
Type	SAK 70/35
GTIN (EAN)	4008190088552
Qty.	10 pc(s).
Delivery status	This article will no longer be available in the future.
Available until	2023-03-31
Alternative product	9512190000

Creation date July 22, 2024 10:10:43 AM CEST

Catalogue status 13.07.2024 / We reserve the right to make technical changes.

SAK 70/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	78 mm	Depth (inches)	3.071 inch
Height	75 mm	Height (inches)	2.953 inch
Width	22 mm	Width (inches)	0.866 inch
Net weight	156.1 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

Material data

Material	PA 66	Colour	beige / yellow
UL 94 flammability rating	V-2		

System specifications

Version	Screw connection, for screwable cross-connection, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 35	N-function	No
PE function	No	PEN function	No

Additional technical data

Explosion-tested version	No	Number of similar terminals	1
Open sides	right	Type of mounting	Clamped

CSA rating data

Certificate No. (CSA)	12400-136	Current size C (CSA)	150 A
Voltage size C (CSA)	600 V	Wire cross section max. (CSA)	00 AWG
Wire cross section min. (CSA)	4 AWG		

Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	35 mm ²
---	--------------------

SAK 70/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

Blade size	S6 (DIN 6911)	Clamping range, max.	70 mm ²
Clamping range, min.	16 mm ²	Clamping screw	M 8
Connection cross-section, stranded, max.	70 mm ²	Connection cross-section, stranded, min.	16 mm ²
Connection direction	on side	Gauge to IEC 60947-1	B11
Number of connections	2	Stripping length	24 mm
Tightening torque, max.	12 Nm	Tightening torque, min.	6 Nm
Type of connection	Screw connection	Wire connection cross section AWG, max.	AWG 2/0
Wire connection cross section AWG, min.	AWG 4	Wire connection cross section, finely stranded, max.	70 mm ²
Wire connection cross section, finely stranded, min.	16 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	35 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	16 mm ²	Wire connection cross-section, solid core, max.	16 mm ²
Wire connection cross-section, solid core, min.	16 mm ²		

Dimensions

TS 35 offset	19.5 mm
--------------	---------

General

Rail	TS 35	Standards	IEC 60947-7-1
Wire connection cross section AWG, max.	AWG 2/0	Wire connection cross section AWG, min.	AWG 4

Rating data

Rated cross-section	70 mm ²	Rated voltage	1,000 V
Rated DC voltage	1,000 V	Rated current	192 A
Current at maximum wires	192 A	Standards	IEC 60947-7-1
Volume resistance according to IEC 60947-7-x	0.17 mΩ	Rated impulse withstand voltage	8 kV
Power loss in accordance with IEC 60947-7-x	6.14 W	Pollution severity	3

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	00 AWG
Conductor size Factory wiring min. (UR)	4 AWG	Conductor size Field wiring max. (UR)	00 AWG
Conductor size Field wiring min. (UR)	4 AWG	Current size C (UR)	150 A
Voltage size C (UR)	600 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ETIM 9.0	EC000897
ECLASS 9.0	27-14-11-20	ECLASS 9.1	27-14-11-20
ECLASS 10.0	27-14-11-20	ECLASS 11.0	27-14-11-20
ECLASS 12.0	27-14-11-20	ECLASS 13.0	27-25-01-01

SAK 70/35

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Environmental Product Compliance

REACH SVHC	/
RoHS Compliance Status	Compliant

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (UR)	E60693

Downloads

Approval/Certificate/Document of Conformity	DNVGL certificate Declaration of Conformity UKCA declaration of conformity
Engineering Data	CAD data – STEP
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format