


Eaton C22G25

Catalog Number: C22G25

Eaton Bussmann series low voltage 22 x 58 mm cylindrical/ferrule fuse, rated at 690 Volts AC, 25 Amps, 80 kA Breaking capacity, class gG/gL, without indicator, compatible with a CH22 Modular fuse holder

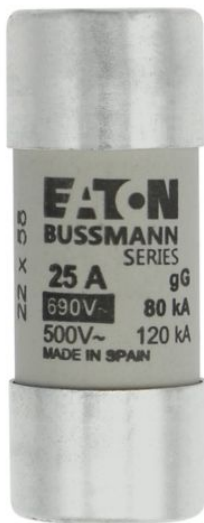

General specifications

Product Name	Catalog Number
Eaton Bussmann series low voltage cylindrical fuse	C22G25
	Model Code
	CYLINDRICAL FUSE 22 x 58 25A GG 690V AC
EAN	UPC
5027590495370	051712754453
Product Length/Depth	Product Height
58 mm	22.2 mm
Product Width	Product Weight
22.2 mm	53.9 g
Compliances	Certifications
CE Marked	IEC 60269
GoST-R	
RoHS Compliant	

Electrical data

Amperage Rating

25 A

Voltage rating

690 V

Voltage type

AC

Breaking capacity

80 kA

Utilization category

gG (cable protection/equipment protection)

Frequency rating - max

62 Hz

Compatible fuse holder

Suitable for

CH22 Modular fuse holder

Resources

Catalogues

CA134002EN

Compliance information

CE C08G, C08M, etc cylindrical fuselinks

UKCA C08G, C08M, etc cylindrical fuselinks

Multimedia

Video Cylindrical fuse link portfolio

Technical data sheets

720115 Cylindrical fuses

Technical service bulletins

Datasheet - C22G25



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All rights reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Eaton.com/socialmedia