


Eaton C22G80

Catalog Number: C22G80

Eaton Bussmann series low voltage 22 x 58 mm cylindrical/ferrule fuse, rated at 500 Volts AC, 80 Amps, 120 kA Breaking capacity, class gG/gL, without indicator, compatible with a CH22 Modular fuse holder

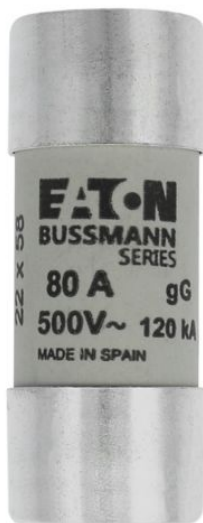

General specifications

Product Name	Catalog Number
Eaton Bussmann series low voltage cylindrical fuse	C22G80
	EAN
	5027590495561
UPC	Product Length/Depth
051712754507	58 mm
Product Height	Product Width
22.2 mm	22.2 mm
Product Weight	Compliances
55 g	CE Marked
	GoST-R
	RoHS Compliant
Certifications	
IEC 60269	

Electrical data

Amperage Rating

80 A

Voltage rating

500 V

Voltage type

AC

Breaking capacity

120 kA

Utilization category

gG (cable protection/equipment protection)

Frequency rating - max

62 Hz

Compatible fuse holder

Suitable for

CH22 Modular fuse holder

Resources

Catalogues

CA134002EN

Compliance information

UKCA C08G, C08M, etc cylindrical fuselinks

CE C08G, C08M, etc cylindrical fuselinks

Multimedia

Video Cylindrical fuse link portfolio

Technical data sheets

720115 Cylindrical fuses

Technical service bulletins

Datasheet - C22G80



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All rights reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Eaton.com/socialmedia