

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



TRIO POWER primary-switched power supply in IP67 die-cast housing, input: 3-phase, output: 24 V DC / 20 A

## Your advantages

- Direct installation at the load in the field reduces cable lengths and saves space in the control cabinet
- The robust design (die-cast aluminum housing) ensures high system availability, thanks to resistance to extreme environmental conditions (temperature, dust, and water)
- Reliable startup of high loads, thanks to the dynamic boost
- High efficiency of > 93%, thanks to low power losses

## Commercial Data

Item number	1039829
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CMP
Product Key	CMPF33
Catalog Page	Page 265 (C-4-2019)
GTIN	4055626595795
Weight per Piece (including packing)	4,550 g
Weight per Piece (excluding packing)	3,589 g
Customs tariff number	85044083
Country of origin	CN

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

## Technical Data

### Input data

#### AC operation

Network type	Star network
Nominal input voltage range	3x 400 V AC ... 500 V AC
	2x 400 V AC ... 500 V AC
Input voltage range	3x 400 V AC ... 500 V AC -20 % ... +15 %
	2x 400 V AC ... 500 V AC -10 % ... +15 %
Input voltage range AC	3x 320 V AC ... 575 V AC
Typical national grid voltage	3x 400 V AC
	3x 480 V AC
Voltage type of supply voltage	AC
Inrush current	typ. 22 A (at 25 °C)
Inrush current integral ( $I^2t$ )	0.5 A <sup>2</sup> s
Inrush current limitation	≤ 22 A (at 25 °C)
AC frequency range	50 Hz ... 60 Hz
Mains buffering time	typ. 10 ms (400 V AC)
	typ. 20 ms (500 V AC)
Current consumption	3x 1.2 A (400 V AC)
	3x 1 A (500 V AC)
	2x 2.3 A (400 V AC)
	2x 1.9 A (500 V AC)
Nominal power consumption	39 W
Protective circuit	Transient surge protection; Varistor
Typical response time	< 1 s
Input fuse	3.15 A (internal (device protection), slow-blow)
Recommended breaker for input protection	6 A ... 16 A (Characteristics B, C, D, K)
Discharge current to PE	< 3.5 mA
	< (550 V AC, 60 Hz)
Voltage type of supply voltage	AC
Mains buffering time	> 15 ms (230 V AC)
Current consumption	4.9 A (110 V DC)
	2.1 A (250 V DC)

### Output data

Efficiency	93 % (400 V AC)
	93 % (500 V AC)
Nominal output voltage	24 V DC ±1 %
Nominal output current ( $I_N$ )	20 A
Dynamic Boost ( $I_{Dyn.Boost}$ )	30 A (5 s)
Derating	> 60 °C ... 70 °C (2.5%/K)
Protection against overvoltage at the output (OVP)	≤ 30 V DC

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

Control deviation	< 1 % (change in load, static 10 % ... 90 %)
	< 3 % (Dynamic load change 10 % ... 90 %, 10 Hz)
	< 0.1 % (change in input voltage $\pm 10$ %)
Residual ripple	$\leq 20$ mV <sub>PP</sub>
Short-circuit-proof	yes
Output power	480 W
	720 W
Maximum no-load power dissipation	< 2 W (400 V AC)
	< 2.5 W (480 V AC)
Power loss nominal load max.	< 44 W (400 V AC)
	< 44 W (480 V AC)
Rise time	$\leq 120$ ms ( $U_{OUT}$ (10 % ... 90 %))

## Signal: DC OK

Maximum switching voltage	30 V AC/DC
Continuous load current	100 mA

## Signal relay 13/14

Default	closed
Digital	30 V AC 30 V DC 100 mA

## Connection data

### Input

Connection method	M12 circular connector
Coding	S
Type of locking	M12 screw locking
Number of positions	4

### Output

Connection method	M17 circular connector
Coding	N
Type of locking	M17 standard and SPEEDCON locking
Number of positions	4

### Signal

Connection method	Circular connector
Coding	A
Type of locking	SPEEDCON M12
Number of positions	5

## Signaling

Types of signaling	LED
	Floating signal contact

## Signal output: LED status indicator

Signalization designation	DC OK
---------------------------	-------

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

Status display	LED
Color	green
DC OK	$U_{OUT} > 0.9 \times U_N$ ( $U_N = 24 \text{ V DC}$ )

## Electrical properties

Number of phases	3.00
Insulation voltage input/output	4 kV AC (type test)
	1.5 kV AC (routine test)

## Product properties

Product type	Power supply
Product family	TRIO POWER
MTBF (IEC 61709, SN 29500)	> 1500000 h (25 °C)
	> 620000 h (40 °C)
	> 230000 h (60 °C)

## Insulation characteristics

Protection class	I
Degree of pollution	4

## Dimensions

### Installation dimensions

Installation distance right/left	20 mm / 20 mm
Installation distance top/bottom	50 mm / 100 mm

### Item dimensions

Width	151 mm
Height	304 mm
Depth	120 mm

### Drill hole

Diameter	5.6 mm
----------	--------

## Mounting

Mounting type	Wall mounting
Assembly instructions	Alignable: 20 mm horizontally, 50 mm vertically above, 100 mm vertically below
With protective coating	No

## Material specifications

Flammability rating according to UL 94 (housing / terminal blocks)	V0
Housing material	Metal
Type of housing	Aluminum (AlMg3)

## Environmental and real-life conditions

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

## Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Derating > 60 °C (3 AC): 2,5 %/K / > 50 °C (2 AC): 2,5 %/K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (start-up type tested)	-40 °C
Maximum altitude	≤ 4000 m (> 2000 m, Derating: 10 %/1000 m)
Climatic class	3K3 (in acc. with EN 60721)
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, non-condensing)
Shock	18 ms, 30g, in each space direction (according to IEC 60068-2-27)
Vibration (operation)	In each space direction (in acc. with EN 60068-2-6) 10 Hz - 19.9 Hz, ±2.5 mm amplitude, 19.9 Hz - 150 Hz, 4g acceleration

## Standards and regulations

Standard – Limitation of mains harmonic currents	EN 61000-3-2
Standard - Electrical safety	IEC 61010-2-201 (SELV)
Standard – Safety extra-low voltage	EN 60204-1 (PELV)
Standard - Safe isolation	DIN VDE 0100-410

## Overvoltage category

EN 61010-1	III (≤ 2000 m)
	II (≤ 4000 m)

## Approvals

### Conformity/Approvals

SIL in accordance with IEC 61508	0
Performance level according to ISO 13849	without

## EMC data

Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Interference emission	Interference emission in accordance with EN 61000-6-3 (residential and commercial) and EN 61000-6-4 (industrial)
Noise immunity	Immunity in accordance with EN 61000-6-1 (residential), EN 61000-6-2 (industrial)
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Conducted noise emission	EN 55016
	EN 61000-6-3 (Class B)
Noise emission	EN 55011 (EN 55022)
Noise emission	EN 55016
	EN 61000-6-3 (Class B)

## Harmonic currents

Frequency range	Class A
-----------------	---------

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

## Flicker

Standards/regulations	EN 61000-3-3
Frequency range	0 kHz ... 2 kHz

## Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

## Electrostatic discharge

Contact discharge	6 kV (Test Level 4)
Discharge in air	8 kV (Test Level 4)
Comments	Criterion A

## Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

## Electromagnetic HF field

Frequency range	80 MHz ... 1 GHz
Test field strength	10 V/m (Test Level 3)
Frequency range	1 GHz ... 2 GHz
Test field strength	10 V/m (Test Level 3)
Frequency range	2 GHz ... 3 GHz
Test field strength	10 V/m (Test Level 3)
Comments	Criterion A

## Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

## Fast transients (burst)

Input	4 kV (Test Level 4 - asymmetrical)
Output	2 kV (Test Level 3 - asymmetrical)
Signal	1 kV (Test Level 2 - asymmetrical)
Comments	Criterion A

## Surge voltage load (surge)

Standards/regulations	EN 61000-4-5
Input	2 kV (Test Level 3 - symmetrical)
	4 kV (Test Level 4 - asymmetrical)
Output	1 kV (Test Level 2 - symmetrical)
	2 kV (Test Level 1 - asymmetrical)
Signal	1 kV (Test Level 1 - asymmetrical)
Comments	Criterion B

## Conducted interference

Standards/regulations	EN 61000-4-6
-----------------------	--------------

## Conducted interference

Input/Output	asymmetrical
--------------	--------------

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

Frequency range	0.15 MHz ... 80 MHz
Comments	Criterion A
Voltage	10 V (Test Level 3)

## Voltage dips

Standards/regulations	EN 61000-4-11
Voltage	400 V AC
Frequency	50 Hz
Voltage dip	70 %
Number of periods	25 periods
Additional text	Test Level 2
Comments	Criterion A
Voltage dip	40 %
Number of periods	10 periods
Additional text	Test Level 2
Comments	Criterion A
Voltage dip	0 %
Number of periods	1 period
Additional text	Test Level 2
Comments	Criterion A

## Emitted interference

Standards/regulations	EN 61000-6-3
Radio interference voltage in acc. with EN 55011	EN 55011 (EN 55022) Class B, area of application: Industry and residential
Emitted radio interference in acc. with EN 55011	EN 55011 (EN 55022) Class B, area of application: Industry and residential

## Criteria

Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.
Criterion C	Temporary adverse effects on the operating behavior, which the device corrects automatically or which can be restored by actuating the operating elements.

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit




1039829

<https://www.phoenixcontact.com/in/products/1039829>

## Drawings

Block diagram

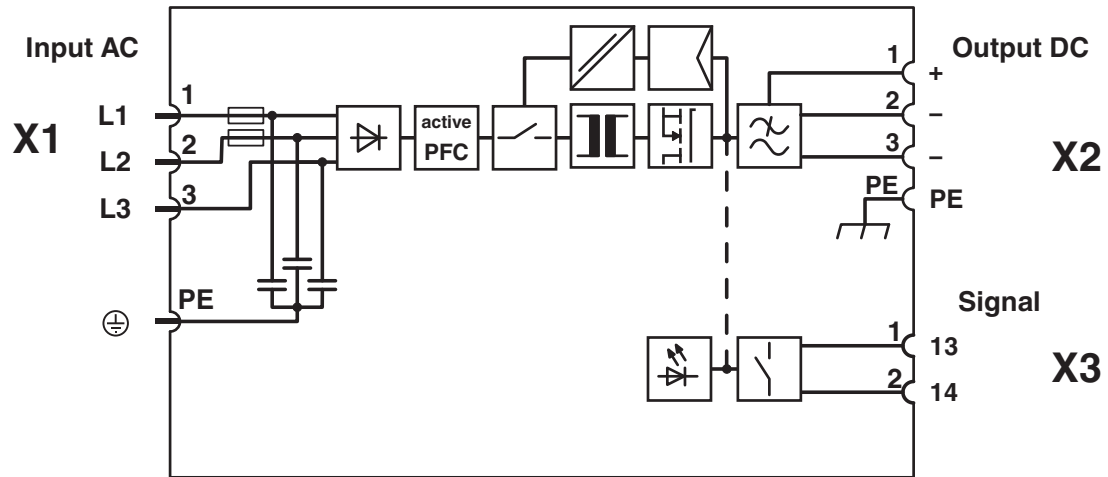



# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

## Approvals



**EAC**

Approval ID: RU S-DE.BL08.W.00764



**cCSAus**

Approval ID: 70175690

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

## Classifications

### ECLASS

ECLASS-11.0	27040701
ECLASS-13.0	27040701
ECLASS-12.0	27040701

### ETIM

ETIM 8.0	EC002540
----------	----------

### UNSPSC

UNSPSC 21.0	39121000
-------------	----------

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 25;
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit



1039829

<https://www.phoenixcontact.com/in/products/1039829>

## Accessories

### SACC-M12FSS-3PECON-PG11-M - Power connector

1404642

<https://www.phoenixcontact.com/in/products/1404642>



Power connector, Power, 4-position, Socket straight M12, S, Screw connection, knurl material: Zinc die-cast, nickel-plated, cable gland Pg11, external cable diameter 8 mm ... 10 mm, for AC current up to 12 A/630 V

---

### ST-3EP1N8A8005 - Cable connector

1624534

<https://www.phoenixcontact.com/in/products/1624534>



Cable connector, straight, Screw locking, M17, number of positions: 3+PE, type of contact: Pin, shielded: yes, degree of protection: IP67, cable diameter range: 10 mm ... 12.5 mm, number of positions: 4, connection method: Crimp connection, series: ST, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1245220

# TRIO-PS-IP67/3AC/24DC/20 - Power supply unit

1039829

<https://www.phoenixcontact.com/in/products/1039829>



## SACC-FS-5SC M SCO - Connector

1432583

<https://www.phoenixcontact.com/in/products/1432583>



Connector, 5-position, Socket straight M12 SPEEDCON, A, Spring-cage connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)