


# NBC-R4AC/0,5-94Z/R4AC - Network cable



1403926

<https://www.phoenixcontact.com/pc/products/1403926>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Assembled Ethernet cable, shielded, 4-pair, 26 AWG stranded (7-wire), RAL 5021 (water blue), RJ45 connector/IP20 to RJ45 connector/IP20, line, length: 0.5 m

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1403926             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Product Key                          | ABNABM              |
| Catalog Page                         | Page 386 (C-2-2019) |
| GTIN                                 | 4046356673938       |
| Weight per Piece (including packing) | 49.1 g              |
| Weight per Piece (excluding packing) | 48 g                |
| Customs tariff number                | 85444210            |
| Country of origin                    | CN                  |

# NBC-R4AC/0,5-94Z/R4AC - Network cable



1403926

<https://www.phoenixcontact.com/pc/products/1403926>

## Technical Data

### Product properties

|                      |                         |
|----------------------|-------------------------|
| Product type         | Data cable preassembled |
| Number of positions  | 8                       |
| Sensor type          | Ethernet                |
| No. of cable outlets | 1                       |
| Cable outlet         | straight                |

### Insulation characteristics

|                     |   |
|---------------------|---|
| Degree of pollution | 2 |
|---------------------|---|

### Electrical properties

|   |                       |
|---|-----------------------|
| Rated voltage (III/3)                   | 72 V (DC)             |
| Transmission medium                     | Copper                |
| Transmission characteristics (category) | CAT5 (IEC 11801:2002) |

### Mechanical properties

#### Mechanical data

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 750 |
|-----------------------------|-------|

### Material specifications

|  |    |
|--|----|
| Flammability rating according to UL 94 | V2 |
|--|----|

### Connector

#### Connection 1

|                             |                         |
|-----------------------------|-------------------------|
| Type                        | Plug straight RJ45      |
| Handle color                | gray                    |
| Material                    | CuSn (Contact)          |
|                             | Ni/Au (Contact surface) |
|                             | PC (Contact carriers)   |
|                             | PA (Housing)            |
| Insertion/withdrawal cycles | ≥ 750                   |
| Degree of protection        | IP20                    |

#### Connection 2

|                             |                         |
|-----------------------------|-------------------------|
| Type                        | Plug straight RJ45      |
| Handle color                | gray                    |
| Material                    | CuSn (Contact)          |
|                             | Ni/Au (Contact surface) |
|                             | PC (Contact carriers)   |
|                             | PA (Housing)            |
| Insertion/withdrawal cycles | ≥ 750                   |

# NBC-R4AC/0,5-94Z/R4AC - Network cable



1403926

<https://www.phoenixcontact.com/pc/products/1403926>

## Cable/line

|   |  |
|---|--|
| Cable length                                  | 0.50 m   |
| Ethernet flexible CAT5, 4-pair, SF/UTP [94Z]  |  |
| Shielded                                      | yes  |
| Cable type                                    | Ethernet flexible CAT5, 4-pair, SF/UTP                                     |
| Cable type (abbreviation)                     | 94Z  |
| Signal type/category                          | Ethernet CAT5 (IEC 11801), 1 Gbps  |
| Cable structure                               | 4x2xAWG26/7; SF/UTP  |
| External cable diameter                       | 6.2 mm ±0.2 mm   |
| Outer sheath, material                        | PUR  |
| External sheath, color                        | water blue RAL 5021  |
| Conductor material                            | Bare Cu litz wires   |
| Conductor structure signal line               | 7x 0.16 mm   |
| AWG signal line                               | 26   |
| Conductor cross section                       | 4x 2x 0.14 mm <sup>2</sup>   |
| Material wire insulation                      | PE   |
| Thickness, insulation                         | 0.19 mm (Signal line)  |
| Wire diameter incl. insulation                | 0.92 mm  |
| Single wire, color                            | white/blue-blue, white/orange-orange, white/green-green, white/brown-brown |
| Twisted pairs                                 | 2 cores to the pair  |
| Overall twist                                 | 4 pairs  |
| Shielding                                     | Tinned copper braided shield   |
| Optical shield covering                       | 85 %   |
| Test voltage Core/Core                        | 700 V (50 Hz, 1 min.)  |
| Test voltage Core/Shield                      | 700 V (50 Hz, 1 min.)  |
| Cable resistance                              | ≤ 290 Ω/km (at 20 °C)  |
| Cable insulation resistance                   | ≥ 500 MΩ*km (at 20 °C)   |
| Wave impedance                                | 100 Ω ±15 Ω (at 100 MHz)   |
| Smallest bending radius, fixed installation   | 51.2 mm  |
| Smallest bending radius, movable installation | 51.2 mm  |
| Halogen-free                                  | according to IEC 60754-1   |
| Resistance to oil                             | in accordance with DIN EN 60811-2-1  |
| Flame resistance                              | IEC 60332-1-2  |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Degree of protection            | IP20                              |
| Ambient temperature (operation) | -20 °C ... 70 °C (RJ45 connector) |


# NBC-R4AC/0,5-94Z/R4AC - Network cable

1403926

<https://www.phoenixcontact.com/pc/products/1403926>


## Drawings

Schematic diagram

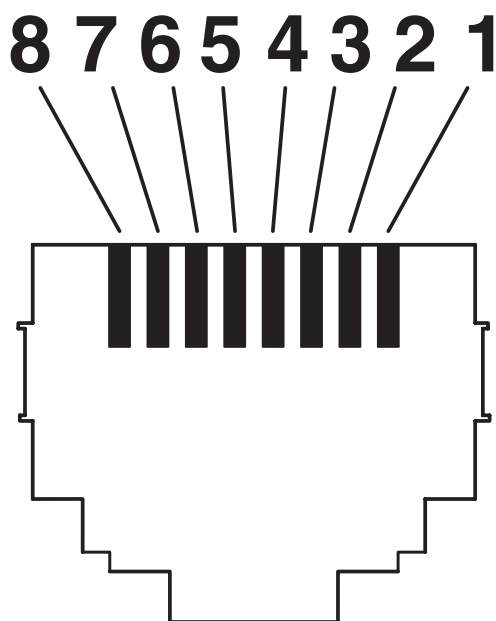

Connector pin assignment plug RJ45

Dimensional drawing

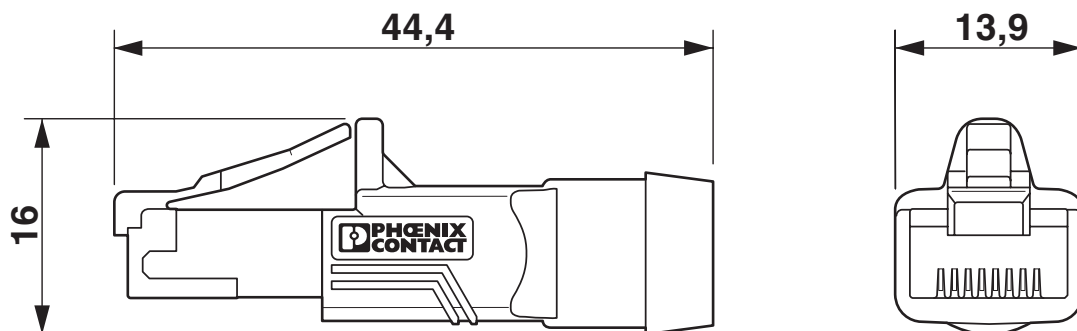

RJ45 connector, IP20


# NBC-R4AC/0,5-94Z/R4AC - Network cable



1403926

<https://www.phoenixcontact.com/pc/products/1403926>

Circuit diagram

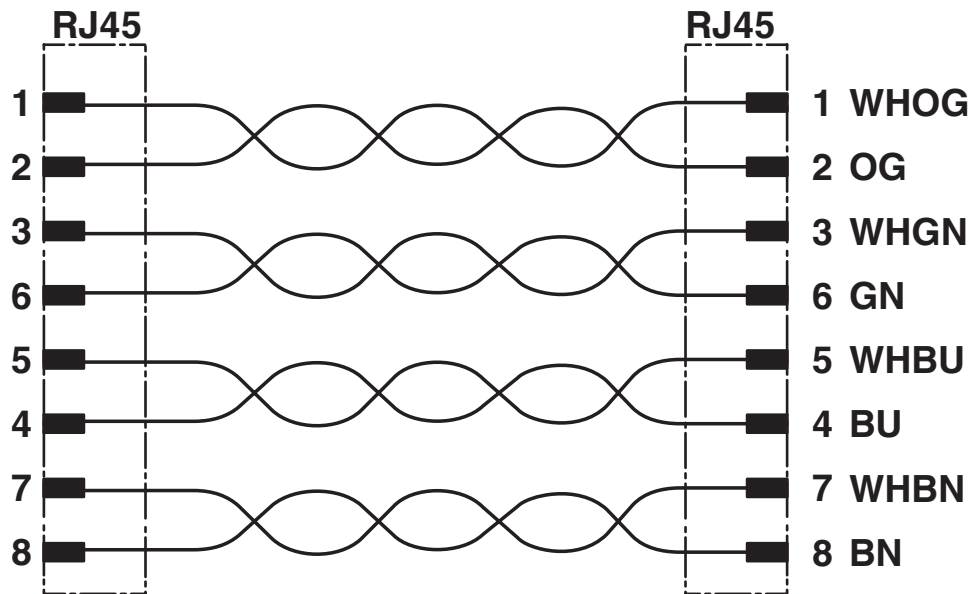

# NBC-R4AC/0,5-94Z/R4AC - Network cable



1403926

<https://www.phoenixcontact.com/pc/products/1403926>

## Approvals

**ERC** **EAC**  
Approval ID: 19060508

**ERC** **EAC**  
Approval ID: B.00385/20

# NBC-R4AC/0,5-94Z/R4AC - Network cable



1403926

<https://www.phoenixcontact.com/pc/products/1403926>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060308 |
| ECLASS-12.0 | 27060308 |
| ECLASS-13.0 | 27060308 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002599 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# NBC-R4AC/0,5-94Z/R4AC - Network cable



1403926

<https://www.phoenixcontact.com/pc/products/1403926>

## Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)