

G-INS-M20-S68N-NNES-S - Cable gland



1411163

<https://www.phoenixcontact.com/in/products/1411163>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver, with O-ring

Commercial data

Item number	1411163
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF7
Product key	BF7DAX
Catalog page	Page 688 (C-2-2019)
GTIN	4046356922982
Weight per piece (including packing)	30.2 g
Weight per piece (excluding packing)	29.28 g
Customs tariff number	74198090
Country of origin	TR

G-INS-M20-S68N-NNES-S - Cable gland

1411163

<https://www.phoenixcontact.com/in/products/1411163>

Technical data

Mounting

Assembly note	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
---------------	---

Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BMBC-02
Shielded	no
Execution of the strain relief	A


Data management status

Article revision	00
------------------	----

Characteristics

Category of shock impact	6
Design, Strain relief	A

Dimensions

Dimensional drawing	
Length	37 mm
Length of the connecting thread	8 mm
Hole diameter	20.1 mm ... 20.3 mm
Wrench size, union nut	22 mm
Wrench size, support	22 mm
Hexagon angular dimension	24.5 mm
Thread type connection side	M20 x 1.5
Thread pitch	1.5 mm

Connection data

Tightening torque	8 Nm \pm 0.5 Nm (Cap nut)
	5.5 Nm (Support sleeve)

G-INS-M20-S68N-NNES-S - Cable gland



1411163

<https://www.phoenixcontact.com/in/products/1411163>

Material specifications

Color	Brass color
Material Compression ring	PA 6
Seal material O-ring	Perbunan
Seal material Cable seal	CR
Material for screw connection	Brass, nickel-plated

Cable/line

External cable diameter Cable 1	6 mm ... 12 mm
External cable diameter	10 mm ... 12 mm (for UL 514 B)
Halogen-free	no

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP68 (5 bar, 30 min.)
	IP69 (DIN EN 60529 / IEC 60529)
Enclosure rating (NEMA)	4X
Ambient temperature (operation)	-40 °C ... 100 °C (static)


G-INS-M20-S68N-NNES-S - Cable gland

1411163

<https://www.phoenixcontact.com/in/products/1411163>

Drawings

Dimensional drawing

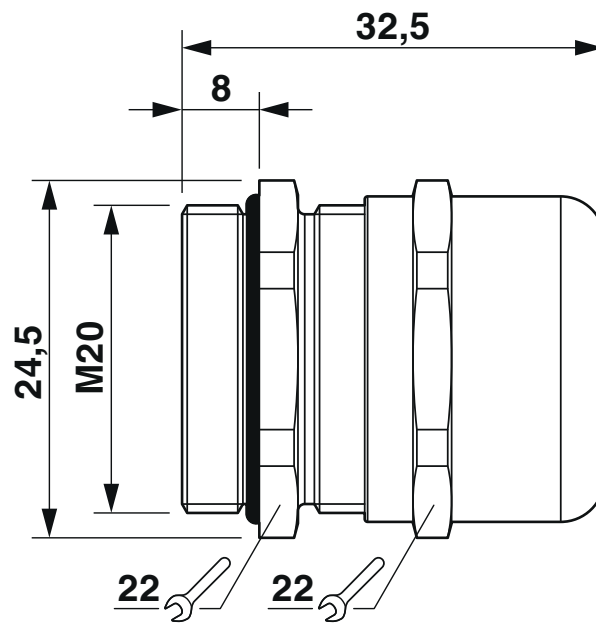

Dimensional drawing

G-INS-M20-S68N-NNES-S - Cable gland



1411163

<https://www.phoenixcontact.com/in/products/1411163>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1411163>

DNV

Approval ID: TAE00003WY



UL Listed

Approval ID: E199260



cUL Listed

Approval ID: E199260

cULus Listed

G-INS-M20-S68N-NNES-S - Cable gland



1411163

<https://www.phoenixcontact.com/in/products/1411163>

Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

G-INS-M20-S68N-NNES-S - Cable gland



1411163

<https://www.phoenixcontact.com/in/products/1411163>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	5a7d5083-b27a-4155-ab7a-3b0d98e0c179

G-INS-M20-S68N-NNES-S - Cable gland



1411163

<https://www.phoenixcontact.com/in/products/1411163>

Accessories

A-INL-M20-N-S - Counter nut

1411242

<https://www.phoenixcontact.com/in/products/1411242>

Counter nut, for threads M20 x 1.5, color: silver



SEALING PLUG 9X16 RD - Closing cap

1400259

<https://www.phoenixcontact.com/in/products/1400259>

Closing cap, color: red



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in