

HC-D 8-I-CT-M - Contact insert



1584350

<https://www.phoenixcontact.com/in/products/1584350>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 8, size: D7, number of connections per position: 1, Pin, Crimp connection, 42 V, 10 A, 0.14 mm² ... 2.5 mm²

Your advantages

- Can be used in rail vehicles, satisfy DIN EN 45545-2 with requirement sets R22, R23, and R24 in hazard levels HL1, HL2, and HL3.
- Shock and vibration-resistant in accordance with DIN EN 61373

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 1584350 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF7 |
| Product key | BF7ABJ |
| Catalog page | Page 507 (C-2-2019) |
| GTIN | 4046356142618 |
| Weight per piece (including packing) | 8.9 g |
| Weight per piece (excluding packing) | 8.5 g |
| Customs tariff number | 85389099 |
| Country of origin | CN |

HC-D 8-I-CT-M - Contact insert



1584350

<https://www.phoenixcontact.com/in/products/1584350>

Technical data

Notes

| | |
|---------|---|
| General | For HC-D7 housing, crimp contacts CK1,6-ED (crimp contacts not included in scope of supply) |
| General | Connectors may be operated only when there is no load/voltage. |
| General | Product already includes one IP65 sealing screw |

Mounting

| | |
|---------------|---|
| Assembly note | To ensure correct use, installation in housing with IP54 protection or better is required |
|---------------|---|

Product properties

| | |
|------------------------------------|--|
| Product type | Contact insert with a fixed no. of positions |
| Series | HC-D |
| Type | D7 |
| Number of positions | 8 |
| Note number of positions | 8 |
| Connection profile | 8 |
| Contact numbering | 1 - 8 |
| Number of connections per position | 1 |
| Contact material type | turned rolled |


Data management status

| | |
|------------------|----|
| Article revision | 07 |
|------------------|----|

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Dimensions
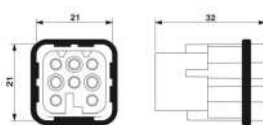
| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 21 mm |
| Height | 32 mm |
| Length | 21 mm |

Mechanical characteristics

| | |
|------------------|--------|
| Contact diameter | 1.6 mm |
|------------------|--------|

Connection data

HC-D 8-I-CT-M - Contact insert



1584350

<https://www.phoenixcontact.com/in/products/1584350>

Connection technology

| | |
|------------------------------------|------------------|
| Connection technology | Crimp connection |
| Number of connections per position | 1 |
| Connection in acc. with standard | IEC / EN |

Conductor connection

| | |
|---|--|
| Conductor cross section | 0.14 mm ² ... 2.5 mm ² |
| Connection cross section AWG | 26 ... 14 |
| Tightening torque | 0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing) |
| Stripping length of the individual wire | 8 mm (0.14 mm ² ... 1.5 mm ²) |
| | 6 mm (2.5 mm ²) |

Electrical properties

| | |
|-----------------------|----------------|
| Rated voltage (III/3) | 42 V |
| Rated surge voltage | 0.8 kV |
| Rated current | 10 A |
| SCCR | 5 kA (UL 2237) |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 500 |
|-----------------------------|-------|

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | V0 |
| Seal material Profile gasket | NBR, conductive |
| Contact material | Copper alloy |
| Contact surface material | Ag (alternatively Au) |
| Contact carrier material | PC |
| Standards/regulations | PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3) |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Ambient temperature (operation) | -40 °C ... 125 °C (including heating up of contacts) |
|---------------------------------|--|

Standards and regulations

| | |
|--|----------------------------|
| Constructional and testing regulations | DIN VDE 0627/86 |
| | DIN VDE 0110/02.79 |
| | DIN VDE 0110-1/04.97 |
| | IEC 60664-1, DIN IEC 60512 |
| | IEC 60352 |
| Tests | DIN VDE 0627/86 |
| | DIN VDE 0110/02.79 |

HC-D 8-I-CT-M - Contact insert



1584350

<https://www.phoenixcontact.com/in/products/1584350>

| | |
|--|----------------------------|
| | DIN VDE 0110-1/04.97 |
| | IEC 60664-1, DIN IEC 60512 |
| | IEC 60352 |

Testing

| | |
|-----------------------|---|
| Standards/regulations | PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3) |
|-----------------------|---|


HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>


Drawings

Schematic diagram

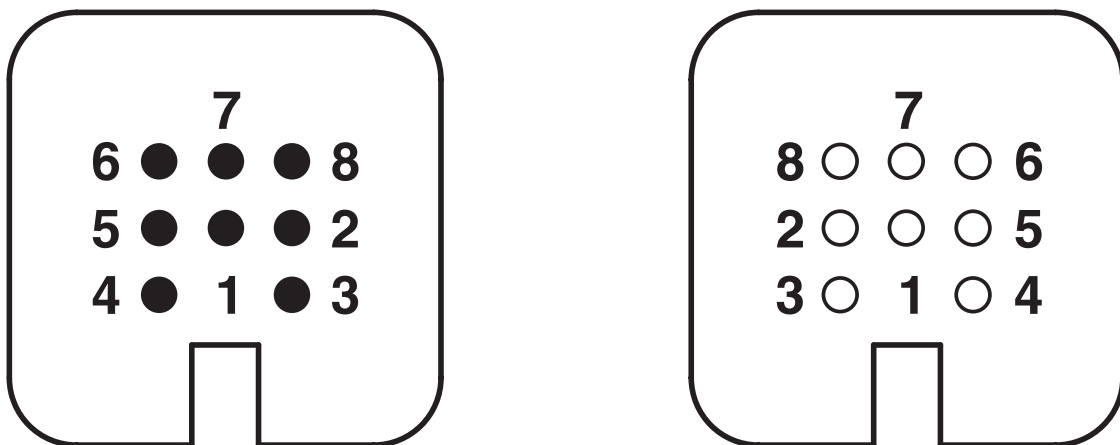

Connector pin assignment connection side: Left pin; right socket

Diagram

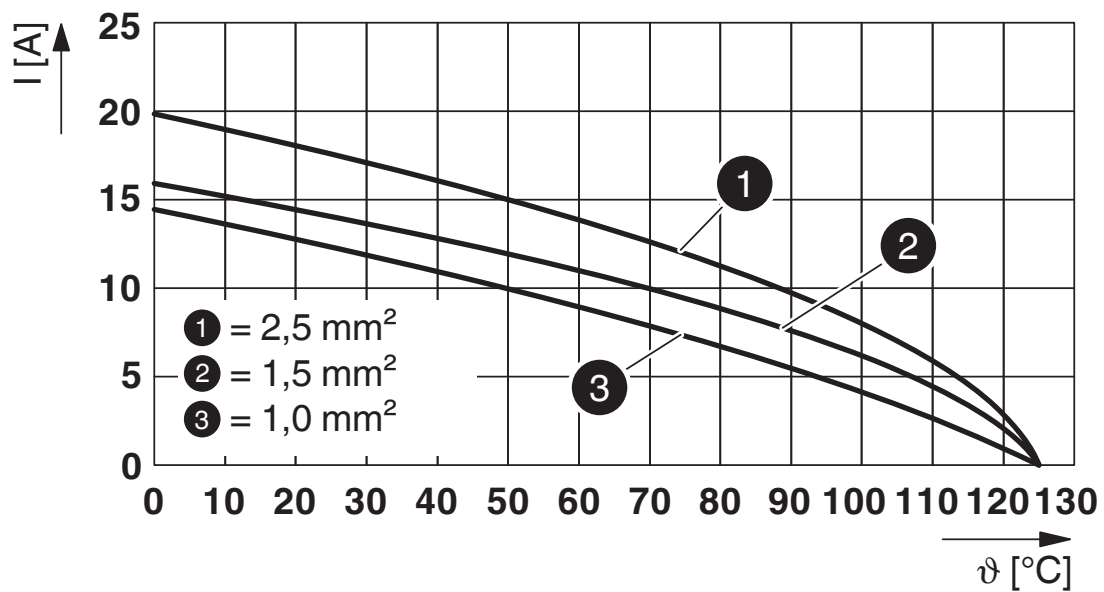


Derating diagram rolled contacts

HC-D 8-I-CT-M - Contact insert

1584350


<https://www.phoenixcontact.com/in/products/1584350>

Diagram

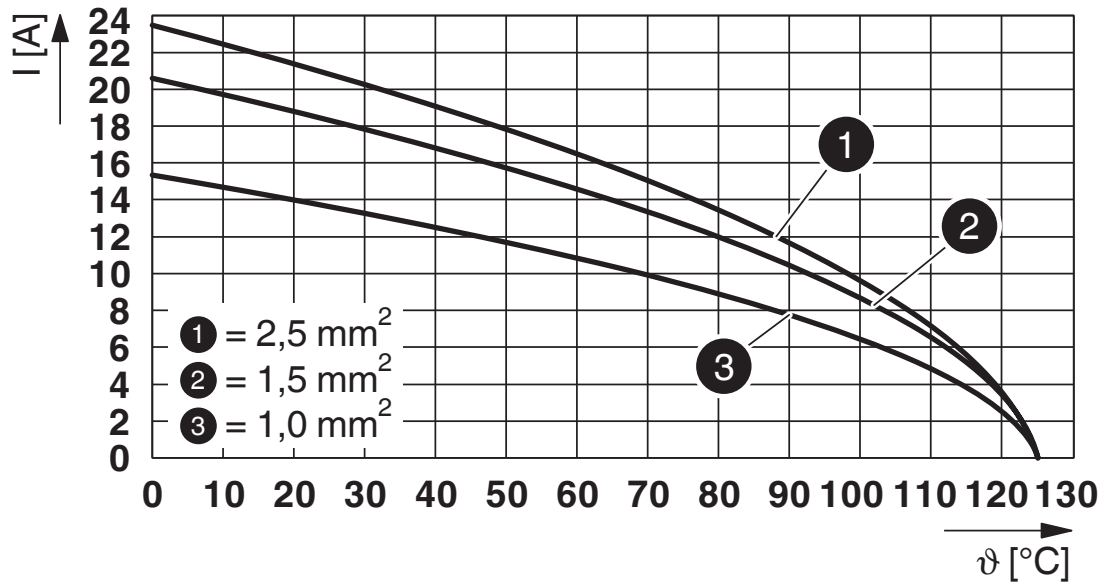

Derating diagram turned contacts

Dimensional drawing

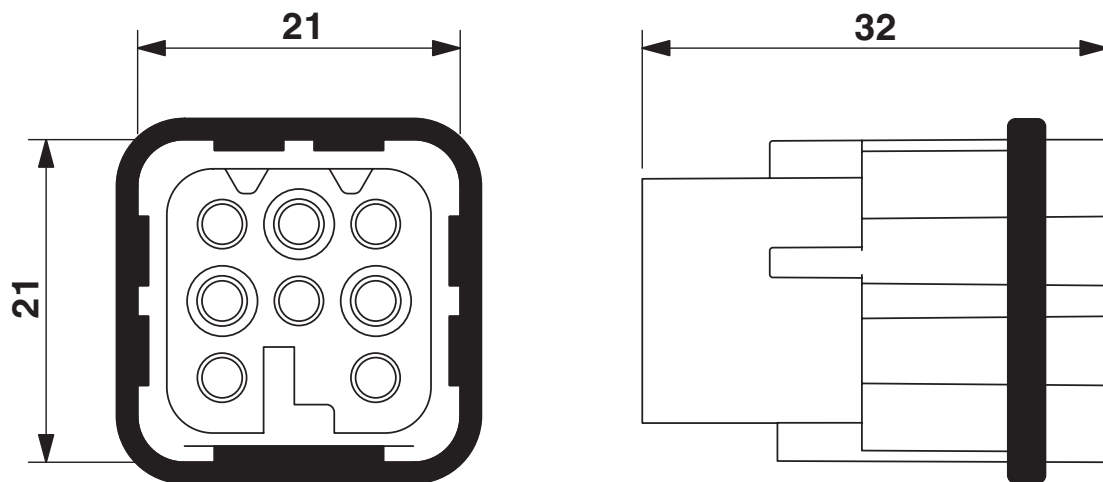

Male insert

HC-D 8-I-CT-M - Contact insert



1584350

<https://www.phoenixcontact.com/in/products/1584350>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1584350>

DNV

Approval ID: TAE000037S



CSA

Approval ID: 13631

| Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|-----------------------|-----------------------|-------------------|-----------------------------|
| 600 V | 10 A | - 14 | - |



UL Recognized

Approval ID: E118976

| Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|-----------------------|-----------------------|-------------------|-----------------------------|
| 600 V | 12 A | - 14 | - |



EAC

Approval ID: RU C-DE.BL08.B.00511



cULus Recognized

Approval ID: E468743

| Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|-----------------------|-----------------------|-------------------|-----------------------------|
| 600 V | 12 A | - 14 | - |

HC-D 8-I-CT-M - Contact insert



1584350

<https://www.phoenixcontact.com/in/products/1584350>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440205 |
| ECLASS-12.0 | 27440205 |
| ECLASS-13.0 | 27440205 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000438 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121500 |
|-------------|----------|

HC-D 8-I-CT-M - Contact insert



1584350

<https://www.phoenixcontact.com/in/products/1584350>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



Accessories

HC-D07-SP-RBK - Profile gasket

1419622

<https://www.phoenixcontact.com/in/products/1419622>

Profile gasket, design: D7, for pin inserts



HC-D 7-DS-IP65 - Sealing screw

1686229

<https://www.phoenixcontact.com/in/products/1686229>

Sealing screw, size: Countersunk head, IP67, replacement part for D7 size HEAVYCON housing



HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-0,37ST AG - Crimp contact

1663336

<https://www.phoenixcontact.com/in/products/1663336>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 26 ... 22

CK1,6-ED-0,50ST AG - Crimp contact

1663349

<https://www.phoenixcontact.com/in/products/1663349>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-0,75ST AG - Crimp contact

1663352

<https://www.phoenixcontact.com/in/products/1663352>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

CK1,6-ED-1,00ST AG - Crimp contact

1663365

<https://www.phoenixcontact.com/in/products/1663365>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-1,50ST AG - Crimp contact

1663378

<https://www.phoenixcontact.com/in/products/1663378>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

CK1,6-ED-2,50ST AG - Crimp contact

1663381

<https://www.phoenixcontact.com/in/products/1663381>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-ST-POF - Pin contact

1884995

<https://www.phoenixcontact.com/in/products/1884995>



POF fiber optic pin contact, turned, for contact carriers (HC-DD...I-CT.../ HC-M-12-CT-.../ HC-M-17-CT-...) of CK1,6-ED... contacts

CK1,6-ED-0,37M AG - Crimp contact

1266193

<https://www.phoenixcontact.com/in/products/1266193>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.14 mm² ... 0.34 mm², AWG 26 ... 22

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-0,50M AG - Crimp contact

1266195

<https://www.phoenixcontact.com/in/products/1266195>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

CK1,6-ED-1,50M AG - Crimp contact

1266245

<https://www.phoenixcontact.com/in/products/1266245>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-0,75M AG - Crimp contact

1266450

<https://www.phoenixcontact.com/in/products/1266450>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

CK1,6-ED-1,00M AG - Crimp contact

1266244

<https://www.phoenixcontact.com/in/products/1266244>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-2,50M AG - Crimp contact

1266247

<https://www.phoenixcontact.com/in/products/1266247>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

CK1,6-ED-0,37ST AU - Crimp contact

1674901

<https://www.phoenixcontact.com/in/products/1674901>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 26 ... 22

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-0,50ST AU - Crimp contact

1672453

<https://www.phoenixcontact.com/in/products/1672453>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

CK1,6-ED-0,75ST AU - Crimp contact

1674914

<https://www.phoenixcontact.com/in/products/1674914>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-1,00ST AU - Crimp contact

1674888

<https://www.phoenixcontact.com/in/products/1674888>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

CK1,6-ED-1,50ST AU - Crimp contact

1674875

<https://www.phoenixcontact.com/in/products/1674875>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ED-2,50ST AU - Crimp contact

1674927

<https://www.phoenixcontact.com/in/products/1674927>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

CK1,6-ER-1,00ST OIC AG - Crimp contact

1004360

<https://www.phoenixcontact.com/in/products/1004360>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 0.34 mm² ... 1 mm², AWG 22 ... 17

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-ER-2,50ST OIC AG - Crimp contact

1004365

<https://www.phoenixcontact.com/in/products/1004365>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 1.5 mm² ... 2.5 mm², AWG 16 ... 14

CK1,6-BR-1,00ST OIC AG - Crimp contact

1004380

<https://www.phoenixcontact.com/in/products/1004380>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 0.34 mm² ... 1 mm², AWG 22 ... 17, Taped products

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



CK1,6-BR-2,50ST OIC AG - Crimp contact

1004382

<https://www.phoenixcontact.com/in/products/1004382>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 1.5 mm² ... 2.5 mm², AWG 16 ... 14, Taped products

HC-D 8-I-CT-F - Contact insert

1584363

<https://www.phoenixcontact.com/in/products/1584363>



Contact insert, number of positions: 8, size: D7, number of connections per position: 1, Socket, Crimp connection, 42 V, 10 A, 0.14 mm² ... 2.5 mm²

HC-D 8-I-CT-M - Contact insert

1584350

<https://www.phoenixcontact.com/in/products/1584350>



UNIFOX MT-CK 1.6/2.5 - Assembly tool

1089092

<https://www.phoenixcontact.com/in/products/1089092>



Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections

UNIFOX RT-CK 1.6 - Contact removal tool

1072069

<https://www.phoenixcontact.com/in/products/1072069>



Contact removal tool, for turned and rolled CK- 1.6-... contacts

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in