


# FLKM 16 - Interface module

2281034

<https://www.phoenixcontact.com/in/products/2281034>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module, with screw connection and flat-ribbon cable connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 16-pos.

## Commercial data

Item number	2281034
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	CK2
Product key	CK2181
Catalog page	Page 242 (IF-2007)
GTIN	4017918054489
Weight per piece (including packing)	86.72 g
Weight per piece (excluding packing)	86.72 g
Customs tariff number	85369010
Country of origin	DE

## Technical data

### Product properties

Product type	Interface module
Product family	VARIOFACE
Number of positions	16

### Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

### Insulation characteristics: Air clearances and creepage distances

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

### Electrical properties

Operating voltage (AC)	≤ 30 V AC
Operating voltage (DC)	≤ 60 V DC
Current (per branch)	≤ 1 A

### Air clearances and creepage distances

Rated insulation voltage	63 V
Rated surge voltage	0.6 kV (1.2/50 μs)

### Connection data

#### Connection 1 (control level)

Connection in acc. with standard	IEC 60603-13
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	16
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

#### Connection 2 (field level)

Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Number of positions	16
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross-section rigid (2 conductors with same cross section)	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (Ferrule without plastic sleeve)
	0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (Ferrule with plastic sleeve)
	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>

# FLKM 16 - Interface module



2281034

<https://www.phoenixcontact.com/in/products/2281034>

Conductor cross section flexible (2 conductors with same cross section)	0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup> (Ferrule without plastic sleeve)
	0.5 mm <sup>2</sup> ... 0.5 mm <sup>2</sup> (TWIN ferrule with plastic sleeve)
Conductor cross section AWG	24 ... 12
Tightening torque	0.5 Nm ... 0.6 Nm
Pitch	5.08 mm

## Signaling

Status display present	No
------------------------	----

## Dimensions

### Item dimensions

Width	44.9 mm
Height	79.95 mm
Depth	57.47 mm

## Material specifications

Color	green (RAL 6021)
Housing insulation material	Polyamide 6 green

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (Module)	IP00
Degree of protection (Installation location)	≥ IP54
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Altitude	≤ 2000 m

## Approvals

### UKCA

Certificate	UKCA-compliant
-------------	----------------

## Standards and regulations

### Air clearances and creepage distances

Standards/regulations	EN IEC 60664-1
-----------------------	----------------

## Mounting

Mounting type	DIN rail mounting
Mounting position	any

## Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also
--------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

# FLKM 16 - Interface module

2281034

<https://www.phoenixcontact.com/in/products/2281034>



---

be met.

# FLKM 16 - Interface module


2281034

<https://www.phoenixcontact.com/in/products/2281034>



## Drawings

Circuit diagram

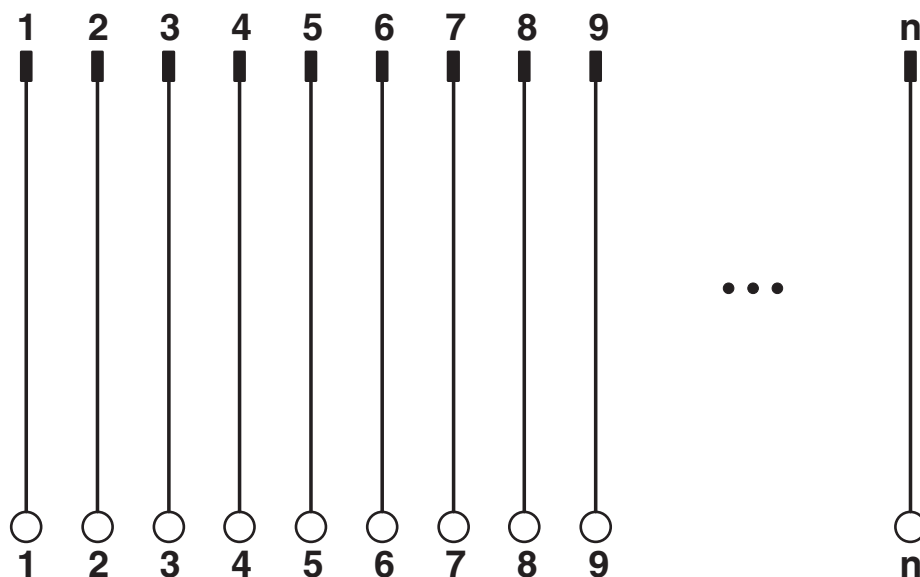

# FLKM 16 - Interface module





2281034

<https://www.phoenixcontact.com/in/products/2281034>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/2281034>

 <b>cUL Recognized</b> Approval ID: FILE E 118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Field wiring	125 V	1 A	30 - 12	-

 <b>UL Recognized</b> Approval ID: FILE E 118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Field wiring	125 V	1 A	30 - 12	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# FLKM 16 - Interface module



2281034

<https://www.phoenixcontact.com/in/products/2281034>

## Classifications

### ECLASS

ECLASS-11.0	27141152
ECLASS-13.0	27141152
ECLASS-12.0	27141152

### ETIM

ETIM 8.0	EC002780
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# FLKM 16 - Interface module



2281034

<https://www.phoenixcontact.com/in/products/2281034>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
-----------------------------------------	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------



# FLKM 16 - Interface module

2281034

<https://www.phoenixcontact.com/in/products/2281034>




## Accessories

### FLK EZ-DR.../.../... - Cable

2295059

<https://www.phoenixcontact.com/in/products/2295059>

Round cable, with preassembly, not shielded, variable cable length



---

### FLK 16/EZ-DR/ 50/KONFEK - Cable

2299291

<https://www.phoenixcontact.com/in/products/2299291>

Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 0.5 m



# FLKM 16 - Interface module

2281034

<https://www.phoenixcontact.com/in/products/2281034>

## FLK 16/EZ-DR/ 100/KONFEK - Cable

2299301

<https://www.phoenixcontact.com/in/products/2299301>



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 1 m

---

## FLK 16/EZ-DR/ 150/KONFEK - Cable

2299314

<https://www.phoenixcontact.com/in/products/2299314>



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 1.5 m

# FLKM 16 - Interface module

2281034

<https://www.phoenixcontact.com/in/products/2281034>

## FLK 16/EZ-DR/ 200/KONFEK - Cable

2299327

<https://www.phoenixcontact.com/in/products/2299327>



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 2 m

---

## FLK 16/EZ-DR/ 300/KONFEK - Cable

2299330

<https://www.phoenixcontact.com/in/products/2299330>



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 3 m

# FLKM 16 - Interface module

2281034

<https://www.phoenixcontact.com/in/products/2281034>

## FLK 16/EZ-DR/ 400/KONFEK - Cable

2299343

<https://www.phoenixcontact.com/in/products/2299343>



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 4 m

---

## FLK 16/EZ-DR/ 600/KONFEK - Cable

2299356

<https://www.phoenixcontact.com/in/products/2299356>



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 6 m

# FLKM 16 - Interface module

2281034

<https://www.phoenixcontact.com/in/products/2281034>

## FLK 16/EZ-DR/ 800/KONFEK - Cable

2299369

<https://www.phoenixcontact.com/in/products/2299369>



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 8 m

---

## FLK 16/EZ-DR/1000/KONFEK - Cable

2299372

<https://www.phoenixcontact.com/in/products/2299372>



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 10 m

# FLKM 16 - Interface module

2281034

<https://www.phoenixcontact.com/in/products/2281034>



## FLK 16/EZ-DR/ 400/KONFEK/S - Cable

2318091

<https://www.phoenixcontact.com/in/products/2318091>



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position) (The braided shield is routed to a separate cable end.); cable length: 4 m

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)