

VIP-3/SC/FLK40 - Interface module



2315078

<https://www.phoenixcontact.com/in/products/2315078>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



VARIOFACE module, with screw connection and flat-ribbon cable connector, for mounting on NS 35 rails, with pin strip and short and long locking latches for socket strips, 40-pos.

Your advantages

- 10-pos. ... 64-pos.
- Metal foot
- In accordance with IEC 60603-13
- 1:1 connection
- Screw connection

Commercial Data

Item number	2315078
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CK2
Product Key	CK2411
Catalog Page	Page 549 (C-5-2019)
GTIN	4046356313292
Weight per Piece (including packing)	197.9 g
Weight per Piece (excluding packing)	197.9 g
Customs tariff number	85366990
Country of origin	US

VIP-3/SC/FLK40 - Interface module



2315078

<https://www.phoenixcontact.com/in/products/2315078>

Technical Data

Product properties

Product type	Interface module
Product family	VARIOFACE Professional
Number of positions	40
No. of channels	2
	4
	6
	8
	16
	32

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

No. of channels	24 6 8 16 32
Max. permissible operating voltage	25 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Rated surge voltage	0.6 kV

Supported controller ALLEN-BRADLEY SLC 500

Suitable I/O card	1746 OB 32
	1746 OV 32
	1746 IB 32
	1746 IV 32

Connection data

Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Controller level

Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	40

VIP-3/SC/FLK40 - Interface module



2315078

<https://www.phoenixcontact.com/in/products/2315078>

Pitch	2.54 mm
-------	---------

Signaling

Status display	No
Status display present	No

Dimensions

Width	77.4 mm
Height	69 mm
Depth	62 mm

Material specifications

Flammability rating according to UL 94	V0
Housing insulation material	Polyamide PA non-reinforced

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Standards/regulations	IEC 60664
	DIN EN 50178

Mounting

Mounting type	DIN rail mounting
Mounting position	any

VIP-3/SC/FLK40 - Interface module


2315078

<https://www.phoenixcontact.com/in/products/2315078>



Drawings

Circuit diagram

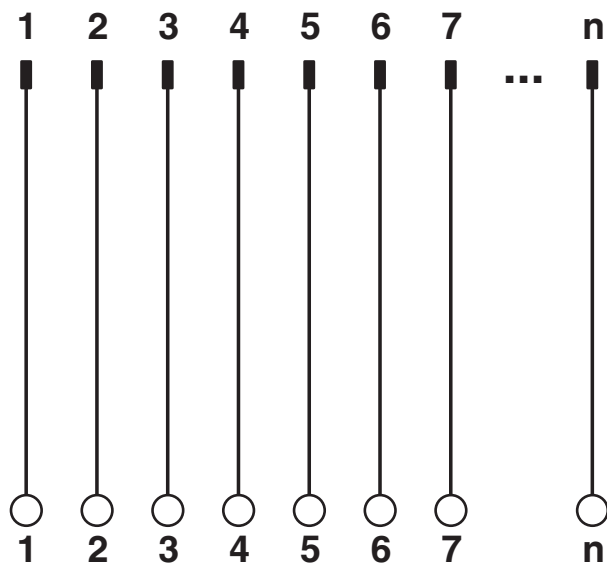


VIP-3/SC/FLK40 - Interface module



2315078

<https://www.phoenixcontact.com/in/products/2315078>

Approvals

 CSA Approval ID: 2122203				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	125 V	1 A	30 - 12	-

 cUL Recognized Approval ID: FILE E 238705				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	125 V	1 A	30 - 12	-

 UL Recognized Approval ID: FILE E 238705				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	125 V	1 A	30 - 12	-

 CSAus Approval ID: 2122203				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	125 V	1 A	30 - 12	-

VIP-3/SC/FLK40 - Interface module



2315078

<https://www.phoenixcontact.com/in/products/2315078>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

ETIM

ETIM 8.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

VIP-3/SC/FLK40 - Interface module



2315078

<https://www.phoenixcontact.com/in/products/2315078>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

VIP-3/SC/FLK40 - Interface module

2315078

<https://www.phoenixcontact.com/in/products/2315078>


Accessories

FLK EZ-DR.../.../... - Cable

2295059

<https://www.phoenixcontact.com/in/products/2295059>

Round cable, with preassembly, not shielded, variable cable length



FLK EZ-DR-S.../.../... - Cable

2295046

<https://www.phoenixcontact.com/in/products/2295046>

Round cable, with preassembly, shielded, variable cable length



VIP-3/SC/FLK40 - Interface module



2315078

<https://www.phoenixcontact.com/in/products/2315078>

UC-TM 4 - Marker for terminal blocks

0818111

<https://www.phoenixcontact.com/in/products/0818111>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 120

UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/in/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

VIP-3/SC/FLK40 - Interface module

2315078

<https://www.phoenixcontact.com/in/products/2315078>



UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/in/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

ZB 5,08:UNBEDRUCKT - Zack marker strip

0809793

<https://www.phoenixcontact.com/in/products/0809793>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.08 mm, lettering field size: 4.98 x 10.5 mm, Number of individual labels: 10

VIP-3/SC/FLK40 - Interface module

2315078

<https://www.phoenixcontact.com/in/products/2315078>



ZB 22:UNBEDRUCKT - Zack marker strip

0811862

<https://www.phoenixcontact.com/in/products/0811862>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 22 mm, lettering field size: 10.5 x 21.8 mm, Number of individual labels: 4

FLK 40/EZ-DR/ 50/KONFEK - Cable

2288985

<https://www.phoenixcontact.com/in/products/2288985>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 0.5 m

VIP-3/SC/FLK40 - Interface module

2315078

<https://www.phoenixcontact.com/in/products/2315078>



FLK 40/EZ-DR/ 100/KONFEK - Cable

2288998

<https://www.phoenixcontact.com/in/products/2288998>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 1 m

FLK 40/EZ-DR/ 150/KONFEK - Cable

2289007

<https://www.phoenixcontact.com/in/products/2289007>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 1.5 m

VIP-3/SC/FLK40 - Interface module

2315078

<https://www.phoenixcontact.com/in/products/2315078>



FLK 40/EZ-DR/ 200/KONFEK - Cable

2289010

<https://www.phoenixcontact.com/in/products/2289010>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 2 m

FLK 40/EZ-DR/ 250/KONFEK - Cable

2289023

<https://www.phoenixcontact.com/in/products/2289023>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 2.5 m

VIP-3/SC/FLK40 - Interface module

2315078

<https://www.phoenixcontact.com/in/products/2315078>



FLK 40/EZ-DR/ 300/KONFEK - Cable

2289036

<https://www.phoenixcontact.com/in/products/2289036>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 3 m

FLK 40/EZ-DR/ 350/KONFEK - Cable

2289049

<https://www.phoenixcontact.com/in/products/2289049>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 3.5 m

VIP-3/SC/FLK40 - Interface module

2315078

<https://www.phoenixcontact.com/in/products/2315078>



FLK 40/EZ-DR/ 400/KONFEK - Cable

2289052

<https://www.phoenixcontact.com/in/products/2289052>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 4 m

FLK 40/EZ-DR/ 600/KONFEK - Cable

2299589

<https://www.phoenixcontact.com/in/products/2299589>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 6 m

VIP-3/SC/FLK40 - Interface module

2315078

<https://www.phoenixcontact.com/in/products/2315078>



FLK 40/EZ-DR/ 800/KONFEK - Cable

2299592

<https://www.phoenixcontact.com/in/products/2299592>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 8 m

FLK 40/EZ-DR/1000/KONFEK - Cable

2299602

<https://www.phoenixcontact.com/in/products/2299602>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 10 m

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in