

LIT 2X1-24 - Surge protection device



2804636

<https://www.phoenixcontact.com/in/products/2804636>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Surge protection in one-piece 6.2 mm wide DIN rail module for two conductors with common reference potential.

Your advantages

- Space saving with a narrow overall width of just 6□mm
- Cost-optimized with tailored product features
- Universal use with extended nominal voltage range

Commercial Data

Item number	2804636
Packing unit	10 pc
Minimum order quantity	1 pc
Sales Key	CL2
Product Key	CL2211
Catalog Page	Page 140 (C-4-2019)
GTIN	4046356428316
Weight per Piece (including packing)	54.12 g
Weight per Piece (excluding packing)	53.46 g
Customs tariff number	85363010
Country of origin	DE

LIT 2X1-24 - Surge protection device

2804636

<https://www.phoenixcontact.com/in/products/2804636>

Technical Data

Product properties

IEC test classification	C1
	C2
	C3
	D1
Type	DIN rail module, one-piece
Product type	Surge protection for MCR technology
Product family	LINETRAB
Surge protection fault message	none

Insulation characteristics

Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal voltage U_N	24 V DC
-----------------------	---------

Connection data

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.8 Nm
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14

Dimensions

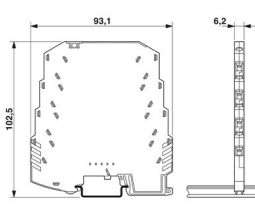Dimensional drawing	
Width	6.2 mm
Height	93.1 mm
Depth	102.5 mm (incl. DIN rail 7.5 mm)

Material specifications

Color	anthracite grey RAL 7016
Flammability rating according to UL 94	V-0
Insulating material	PBT
Housing material	PBT

LIT 2X1-24 - Surge protection device



2804636

<https://www.phoenixcontact.com/in/products/2804636>

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Direction of action	Line-Earth Ground
Maximum continuous voltage U_C	36 V DC
	25 V AC
Rated current	350 mA (40 °C)
Operating effective current I_C at U_C	$\leq 2 \mu\text{A}$
Residual current I_{PE}	$\leq 4 \mu\text{A}$
Nominal discharge surge current I_n (8/20) μs (Core-Earth)	5 kA
Pulse discharge current I_{imp} (10/350) μs (line-earth)	500 A
	1 kA (in total)
Total discharge current I_{total} (8/20) μs	10 kA
	20 kA (1x)
Max. discharge current I_{max} (8/20) μs maximum (line-line)	10 kA
Max. discharge current I_{max} (8/20) μs maximum (line-earth)	20 kA (in total)
Nominal pulse current I_{an} (10/1000) μs (line-earth)	50 A
	100 A (in total)
Output voltage limitation at 1 kV/ μs (line-earth) spike	$\leq 60 \text{ V}$
Residual voltage at I_n (conductor-ground)	$\leq 50 \text{ V}$
Residual voltage with I_{an} (10/1000) μs (line-earth)	$\leq 60 \text{ V}$
Voltage protection level U_p (line-earth)	$\leq 60 \text{ V}$ (C1 - 500 V / 250 A)
	$\leq 95 \text{ V}$ (C2 - 10 kV / 5 kA)
	$\leq 55 \text{ V}$ (C3 - 10 A)
	$\leq 55 \text{ V}$ (C3 - 50 A)
	$\leq 250 \text{ V}$ (D1 - 500 A)
Response time t_A (line-earth)	$\leq 1 \text{ ns}$
Input attenuation aE, asym.	typ. 0.3 dB (1 MHz / 50 Ω)
	typ. 0.2 dB (350 kHz / 150 Ω)
Cut-off frequency f_g (3 dB), asym. (PE) in 50 Ω system	typ. 6 MHz
Cut-off frequency f_g (3 dB), asym. (PE) in 150 Ω system	typ. 2 MHz
Capacity	$\leq 1.3 \text{ nF}$ (per channel)
Resistance per path	3.3 Ω 20 %
Surge protection fault message	none
Max. required back-up fuse	315 mA (T)
Impulse durability (line-earth)	C1 - 500 V / 250 A
	C2 - 10 kV / 5 kA
	C3 - 50 A
	D1 - 500 A
Alternating current carrying capacity (line-earth)	5 A - 1 s

LIT 2X1-24 - Surge protection device



2804636

<https://www.phoenixcontact.com/in/products/2804636>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))

Standards and regulations

Standards/specifications	IEC 61643-21
Standards/specifications	EN 61643-21

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------


LIT 2X1-24 - Surge protection device

2804636


<https://www.phoenixcontact.com/in/products/2804636>

Drawings

Dimensional drawing

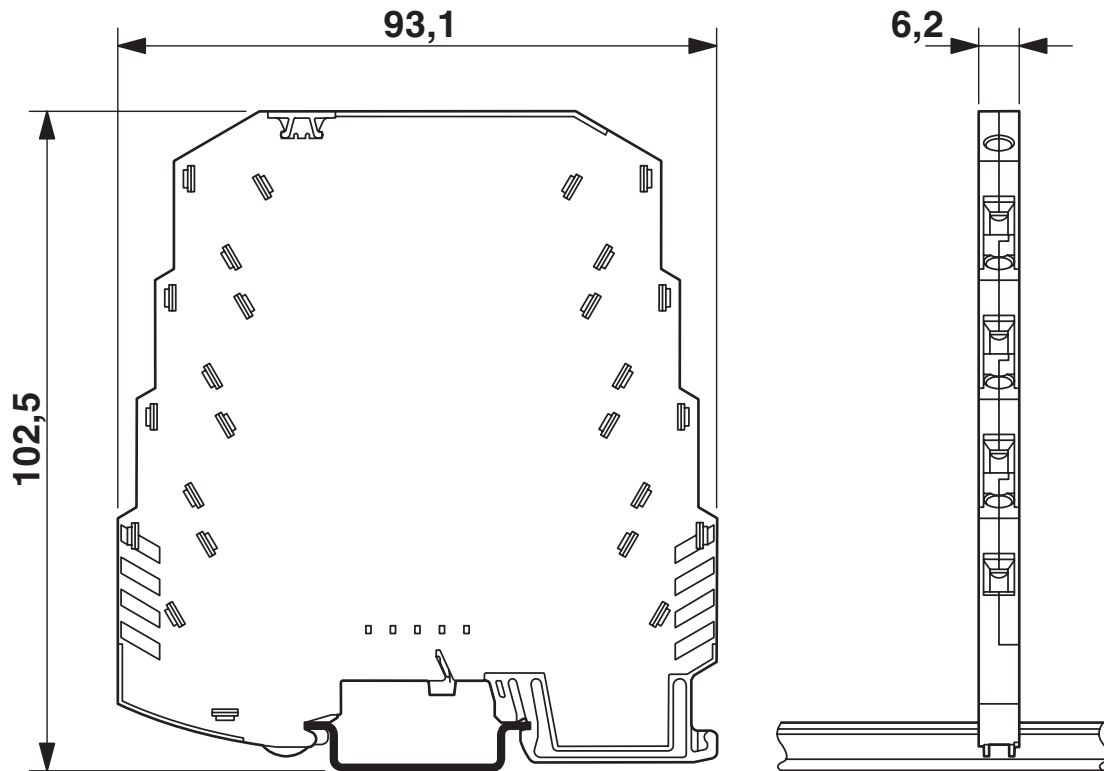

Diagram

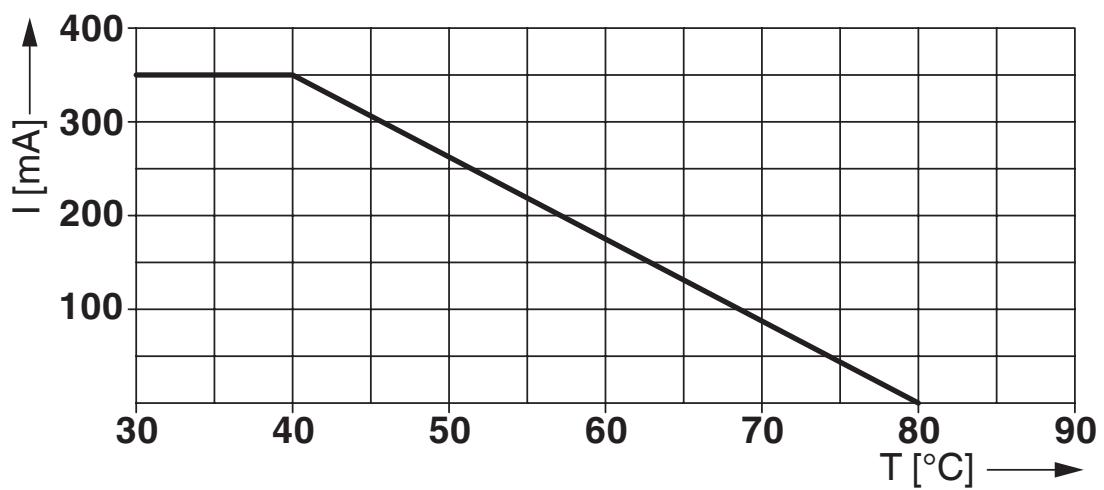

LIT 2X1-24 - Surge protection device



2804636

<https://www.phoenixcontact.com/in/products/2804636>

Approvals



EAC

Approval ID: EAC-Zulassung



DNV GL

Approval ID: TAE00001N8



EAC

Approval ID: RU C-DE. *09.B.00169



UL Listed

Approval ID: FILE E 138168

LIT 2X1-24 - Surge protection device



2804636

<https://www.phoenixcontact.com/in/products/2804636>

Classifications

ECLASS

ECLASS-11.0

27130807

ETIM

ETIM 8.0

EC000943

UNSPSC

UNSPSC 21.0

39121600

LIT 2X1-24 - Surge protection device



2804636

<https://www.phoenixcontact.com/in/products/2804636>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

LIT 2X1-24 - Surge protection device



2804636

<https://www.phoenixcontact.com/in/products/2804636>

Accessories

UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/in/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

UC-TM 6 OG - Marker for terminal blocks

0818328

<https://www.phoenixcontact.com/in/products/0818328>



Marker for terminal blocks, Sheet, orange, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

LIT 2X1-24 - Surge protection device


2804636

<https://www.phoenixcontact.com/in/products/2804636>

UC-TM 6 YE - Marker for terminal blocks

0818331

<https://www.phoenixcontact.com/in/products/0818331>



Marker for terminal blocks, Sheet, yellow, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

UC-TM 6 BU - Marker for terminal blocks

0818344

<https://www.phoenixcontact.com/in/products/0818344>



Marker for terminal blocks, Sheet, blue, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

LIT 2X1-24 - Surge protection device

2804636

<https://www.phoenixcontact.com/in/products/2804636>



UC-TM 6 RD - Marker for terminal blocks

0818357

<https://www.phoenixcontact.com/in/products/0818357>




Marker for terminal blocks, Sheet, red, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

UC-TM 6 GN - Marker for terminal blocks

0818360

<https://www.phoenixcontact.com/in/products/0818360>



Marker for terminal blocks, Sheet, green, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in