

IB IL 24 DO 32/HD-PAC - Digital module



2862822

<https://www.phoenixcontact.com/in/products/2862822>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Inline, Digital output terminal, Digital outputs: 32, 24 V DC, 500 mA, connection technology: 1-conductor, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connectors and marking fields

Product Description

The terminal is designed for use within an Inline station. It is used to output digital signals.

Your advantages


- 32 digital outputs
- Connection of actuators in 1-conductor technology
- Nominal current per output: 500 mA
- Total current of the terminal: 8 A
- Short-circuit and overload-protected outputs

Commercial Data

Item number	2862822
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	DRI
Product Key	DRI132
Catalog Page	Page 129 (C-6-2019)
GTIN	4017918907617
Weight per Piece (including packing)	210.8 g
Weight per Piece (excluding packing)	202.91 g
Customs tariff number	85389099
Country of origin	DE

Technical Data

Dimensions

Dimensional drawing	
Width	48.8 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

Notes

Utilization restriction

CCcex note	Use in potentially explosive areas is not permitted in China.
------------	---

Material specifications

Color	green
-------	-------

Interfaces

Inline local bus

Number of interfaces	2
Connection method	Inline data jumper
Transmission speed	500 kbps

System properties

Module

ID code (dec.)	189
ID code (hex)	BD
Length code (hex)	02
Length code (dec)	02
Process data channel	32 bit
Input address area	0 Byte
Output address area	4 Byte
Register length	32 bit
Required parameter data	6 Byte
Required configuration data	4 Byte

Output data

IB IL 24 DO 32/HD-PAC - Digital module



2862822

<https://www.phoenixcontact.com/in/products/2862822>

Digital

Output name	Digital outputs
Connection method	Spring-cage connection
Connection technology	1-conductor
Number of outputs	32
Protective circuit	Overload protection, short-circuit protection; electronic
Output voltage	24 V ($U_S - 1$ V)
Maximum inrush current	max. 1.5 A (at nominal lamp load for 20 ms)
Output current	max. 500 mA (per channel) max. 8 A (Device)
Nominal output voltage	24 V DC
Output voltage when switched off	max. 2 V
Output current when switched off	max. 300 μ A
Nominal load, inductive	12 VA (1.2 H, 48 Ω)
Nominal load, lamp	12 W
Nominal load, ohmic	12 W (48 Ω)
Maximum operating frequency with ohmic nominal load	max. 300 Hz (this switching frequency is limited by the data rate selected, the number of bus devices, the structure of the bus, the software used and the control or computer system used)
Reverse voltage resistance to short pulses	Reverse voltage proof
Behavior with overload	Auto restart
Behavior with inductive overload	Output can be destroyed
Behavior at voltage switch-off	The output follows the power supply without delay

Product properties

Type	modular
Product type	I/O component
Product family	Inline
Scope of delivery	including Inline connectors and marking fields
No. of channels	32
Operating mode	Process data operation with 2 words
Diagnostics messages	Short-circuit or overload of the digital outputs Error message in the diagnostic code (bus) and display (2 Hz) via the LED (D) on the module

Insulation characteristics

Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

Electrical properties

No. of channels	32
Maximum power dissipation for nominal condition	192 W

Potentials

Power consumption	max. 3 W (Module, complete, HW 00) max. 2.3 W (Module, complete, HW 01 or later)
-------------------	---

IB IL 24 DO 32/HD-PAC - Digital module



2862822

<https://www.phoenixcontact.com/in/products/2862822>

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 140 mA (HW 00)
	max. 30 mA (from HW 01)
Power consumption	max. 1.05 W (HW 00)
	max. 0.225 W (from HW 01)

Potentials: Segment circuit supply (U_S)

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 8 A

Connection data

Connection technology

Connection name	Inline connector
-----------------	------------------

Conductor connection

Connection method	Spring-cage connection
Conductor cross section rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

IB IL 24 DO 32/HD-PAC - Digital module



2862822

<https://www.phoenixcontact.com/in/products/2862822>

Mounting type	DIN rail mounting
---------------	-------------------


IB IL 24 DO 32/HD-PAC - Digital module

2862822

<https://www.phoenixcontact.com/in/products/2862822>


Drawings

Connection diagram

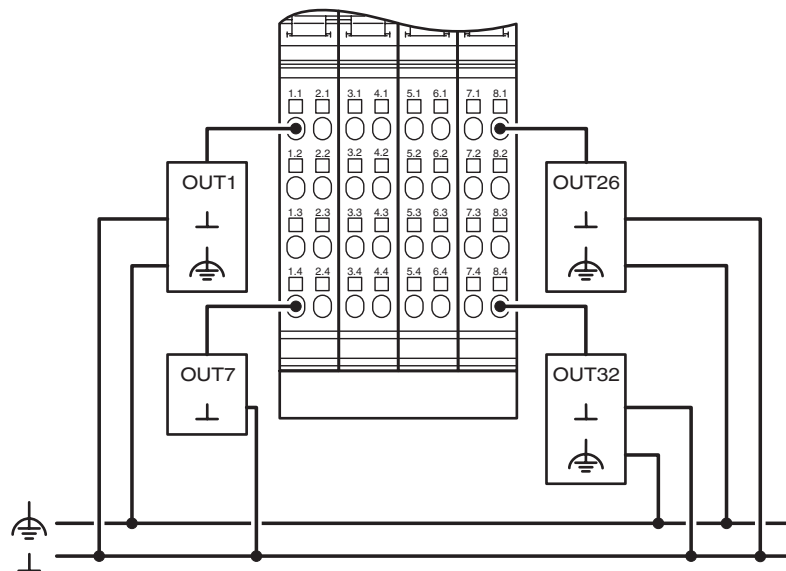

Connection example

Block diagram

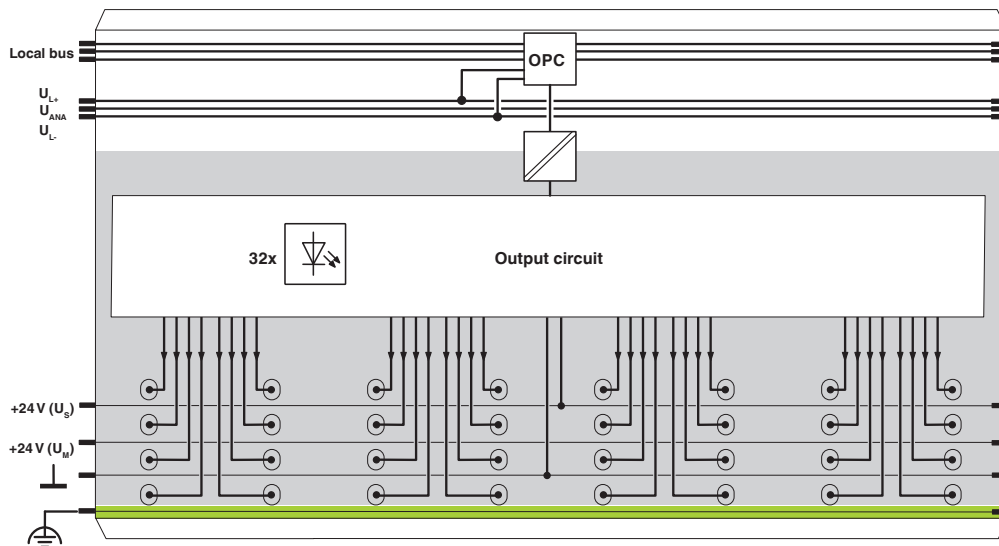


Internal wiring of the terminal points

IB IL 24 DO 32/HD-PAC - Digital module

2862822

<https://www.phoenixcontact.com/in/products/2862822>

Dimensional drawing

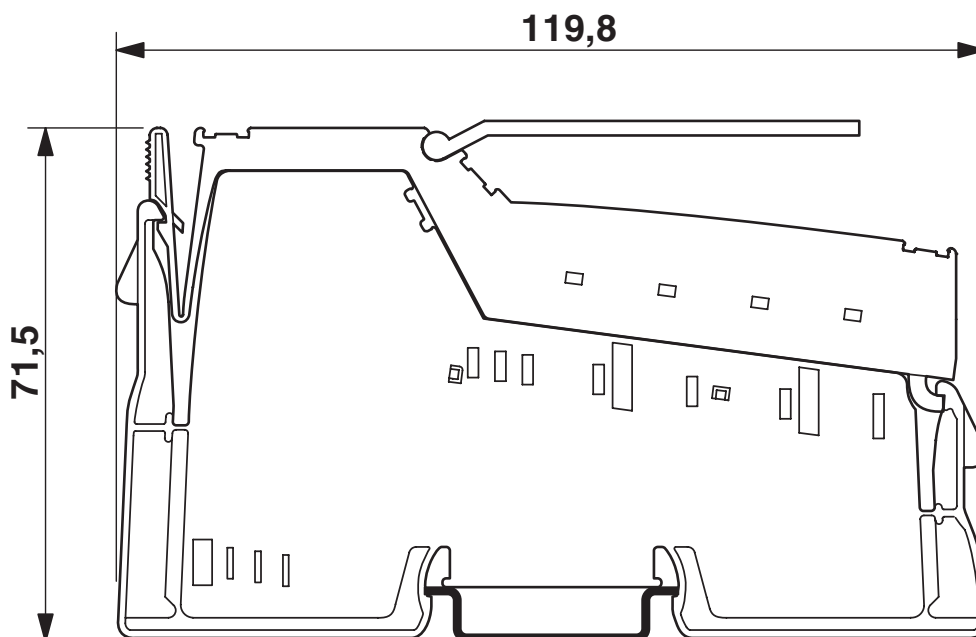

Dimensions (in mm)

2862822

<https://www.phoenixcontact.com/in/products/2862822>

Approvals



cUL Recognized
Approval ID: FILE E 140324



UL Recognized
Approval ID: FILE E 140324



EAC
Approval ID: TR TS_D_01921-19



DNV GL
Approval ID: TAA00000BN



LR
Approval ID: LR22191720TA



BV
Approval ID: 21595/C0 BV



ATEX
Approval ID: PxCIF16ATEX2862822X



cUL Listed
Approval ID: FILE E 199827



UL Listed
Approval ID: FILE E 199827

2862822

<https://www.phoenixcontact.com/in/products/2862822>

Classifications

ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

ETIM

ETIM 8.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

IB IL 24 DO 32/HD-PAC - Digital module

2862822


<https://www.phoenixcontact.com/in/products/2862822>

Accessories

IB IL PD GND-PAC - Potential distributors

2862990

<https://www.phoenixcontact.com/in/products/2862990>



Inline terminal for power distribution (GND), complete with accessories, (connector and labeling field) connections for GND

IB IL DI/DO 8-PLSET - Connector set

2860950

<https://www.phoenixcontact.com/in/products/2860950>



Connector set

IB IL 24 DO 32/HD-PAC - Digital module

2862822

<https://www.phoenixcontact.com/in/products/2862822>



IB IL FIELD 2 - Labeling field

2727501

<https://www.phoenixcontact.com/in/products/2727501>

Labeling field, width: 12.2 mm



IB IL FIELD 8 - Labeling field

2727515

<https://www.phoenixcontact.com/in/products/2727515>

Labeling field, width: 48.8 mm



IB IL 24 DO 32/HD-PAC - Digital module



2862822

<https://www.phoenixcontact.com/in/products/2862822>

ESL 62X10 - Insert strip

0809492

<https://www.phoenixcontact.com/in/products/0809492>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems: Laser printer, mounting type: insert, lettering field size: 62 x 10 mm, Number of individual labels: 72



ESL 62X46 - Insert strip

0809502

<https://www.phoenixcontact.com/in/products/0809502>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems: Laser printer, mounting type: insert, lettering field size: 62 x 46 mm, Number of individual labels: 15



IB IL 24 DO 32/HD-PAC - Digital module

2862822

<https://www.phoenixcontact.com/in/products/2862822>




FLKM 14-PA-INLINE/32 - Front adapters

2302777

<https://www.phoenixcontact.com/in/products/2302777>

VARIOFACE front adapter for Inline modules, for transferring 32 (4 x 8) digital signals.



Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in