


IB IL AO 2/U/BP-ME - Analog module



2863957

<https://www.phoenixcontact.com/in/products/2863957>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Inline, Analog output terminal, Analog outputs: 2, 0 V ... 10 V, -10 V ... 10 V, connection technology: 2-conductor, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connector and labeling field

Product Description

The terminal is designed for use within an Inline station. It is used to output analog voltage signals.

Your advantages

- Connection of sensors in 2- or 3-conductor technology

Commercial Data

Item number	2863957
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	DRI
Product Key	DRI142
Catalog Page	Page 143 (C-6-2019)
GTIN	4017918962647
Weight per Piece (including packing)	84 g
Weight per Piece (excluding packing)	48 g
Customs tariff number	85389099
Country of origin	DE

IB IL AO 2/U/BP-ME - Analog module



2863957

<https://www.phoenixcontact.com/in/products/2863957>

Technical Data

Dimensions

Dimensional drawing	
Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Utilization restriction

CCCEX note	Use in potentially explosive areas is not permitted in China.
------------	---

Material specifications

Color	green
-------	-------

Interfaces

Inline local bus

Number of interfaces	2
Connection method	Inline data jumper
Transmission speed	500 kbps
Transmission physics	Copper

System properties

Module

ID code (dec.)	91
ID code (hex)	5B
Length code (hex)	02
Length code (dec)	02
Process data channel	32 bit
Input address area	4 Byte
Output address area	4 Byte
Register length	32 bit
Required parameter data	6 Byte

IB IL AO 2/U/BP-ME - Analog module



2863957

<https://www.phoenixcontact.com/in/products/2863957>

Required configuration data	5 Byte
-----------------------------	--------

Output data

Analog

Output name	Analog outputs
Connection technology	2-conductor
Number of outputs	2
Data formats	IL, IB ST
Representation of output values	13 bits (12 bits + sign)
Process data update	< 1 ms
Voltage output signal	0 V ... 10 V -10 V ... 10 V
Load/output load voltage output	> 2 kΩ 0.02 %

Product properties

Type	modular
Product type	I/O component
Product family	Inline
Scope of delivery	including Inline connector and labeling field

Electrical properties

Maximum power dissipation for nominal condition	1.8 W
---	-------

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 40 mA typ. 33 mA

Potentials: Supply of analog modules (U_{ANA})

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 35 mA (Full load ($R_L = 2 \text{ k}\Omega$)) max. 28 mA (No-load) typ. 25 mA (Full load ($R_L = 2 \text{ k}\Omega$)) typ. 18 mA (No-load)

Connection data

Connection technology

Connection name	Inline connector
-----------------	------------------

Conductor connection

Connection method	Spring-cage connection
Conductor cross section rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16

IB IL AO 2/U/BP-ME - Analog module



2863957

<https://www.phoenixcontact.com/in/products/2863957>

Stripping length	8 mm
------------------	------

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------


IB IL AO 2/U/BP-ME - Analog module

2863957


<https://www.phoenixcontact.com/in/products/2863957>

Drawings

Dimensional drawing

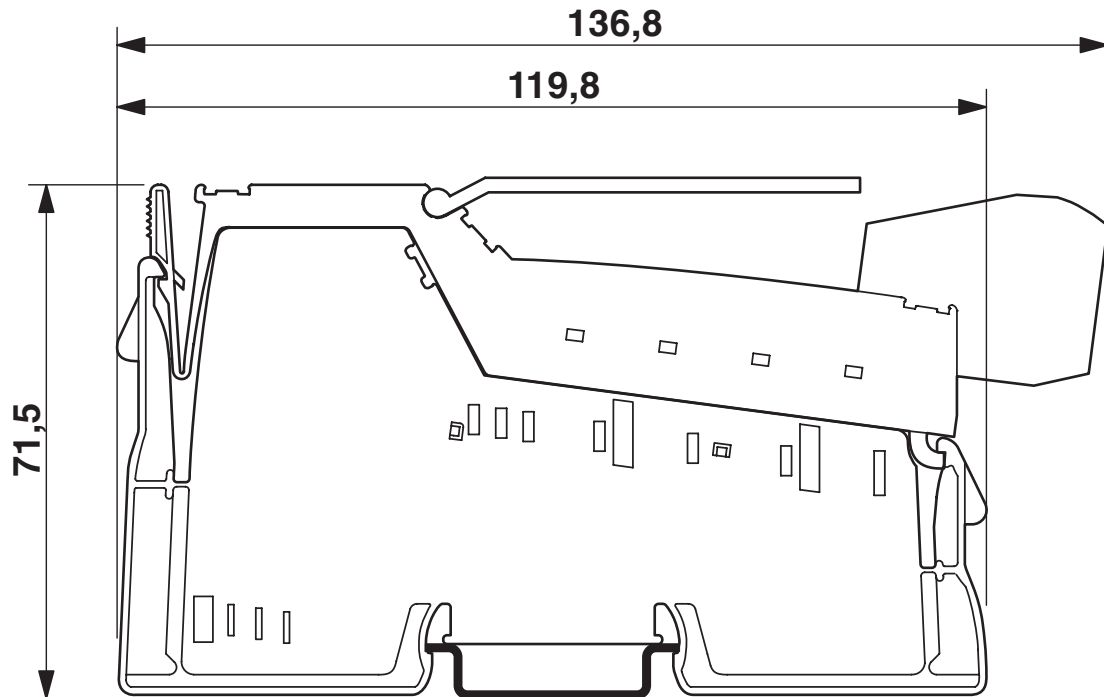

Connection diagram

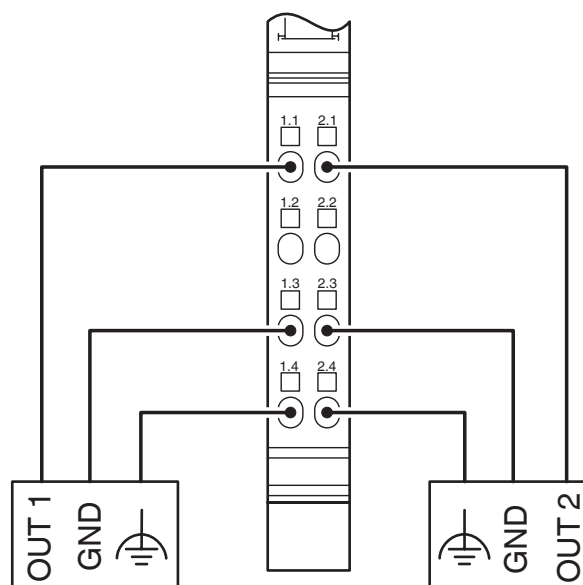

IB IL AO 2/U/BP-ME - Analog module



2863957

<https://www.phoenixcontact.com/in/products/2863957>

Approvals



cUL Recognized
Approval ID: FILE E 140324



UL Recognized
Approval ID: FILE E 140324



EAC
Approval ID: TR TS_D_01921-19



cUL Listed
Approval ID: FILE E 199827



UL Listed
Approval ID: FILE E 199827

IB IL AO 2/U/BP-ME - Analog module



2863957

<https://www.phoenixcontact.com/in/products/2863957>

Classifications

ECLASS

ECLASS-11.0	27242601
ECLASS-12.0	27242601
ECLASS-13.0	27242601

ETIM

ETIM 8.0	EC001596
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

IB IL AO 2/U/BP-ME - Analog module



2863957

<https://www.phoenixcontact.com/in/products/2863957>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

IB IL AO 2/U/BP-ME - Analog module

2863957

<https://www.phoenixcontact.com/in/products/2863957>



Accessories

IB IL FIELD 2 - Labeling field

2727501

<https://www.phoenixcontact.com/in/products/2727501>

Labeling field, width: 12.2 mm



ESL 62X10 - Insert strip

0809492

<https://www.phoenixcontact.com/in/products/0809492>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems: Laser printer, mounting type: insert, lettering field size: 62 x 10 mm, Number of individual labels: 72



Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in