

# UNO-PS/1AC/15DC/100W - Power supply unit



2903002

<https://www.phoenixcontact.com/in/products/2903002>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Primary-switched UNO POWER power supply for DIN rail mounting, input: 1-phase, output: 15 V DC/100 W

## Product Description

UNO POWER power supplies with basic functionality

Thanks to their high power density, compact UNO POWER power supplies are the ideal solution for loads up to 240 W, particularly in compact control boxes. The power supply units are available in various performance classes and overall widths. Their high degree of efficiency and low idling losses ensure a high level of energy efficiency.

## Your advantages

- Flexible mounting by simply snapping onto the DIN rail
- More space in the control cabinet with up to 20 % higher power density
- Maximum energy efficiency, thanks to over 90 % efficiency and extremely low idling losses under 0.3 W
- Outdoor installation, thanks to the wide temperature range from -25°C to +70°C

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2903002             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales Key                            | CMP                 |
| Product Key                          | CMPU19              |
| Catalog Page                         | Page 273 (C-4-2019) |
| GTIN                                 | 4046356808712       |
| Weight per Piece (including packing) | 401.2 g             |
| Weight per Piece (excluding packing) | 340 g               |
| Customs tariff number                | 85044083            |
| Country of origin                    | PL                  |

## Technical Data

### Input data

#### AC operation

|  |  |
|--|--|
| Nominal input voltage range              | 100 V AC ... 240 V AC                            |
| Input voltage range                      | 85 V AC ... 264 V AC                             |
| Input voltage range AC                   | 85 V AC ... 264 V AC                             |
| Voltage type of supply voltage           | AC   |
| Inrush current                           | < 30 A (typ.)                                    |
| Inrush current integral ( $I^2t$ )       | < 1.5 A <sup>2</sup> s (typ.)                    |
| Frequency range ( $f_N$ )                | 50 Hz ... 60 Hz $\pm$ 10 %                       |
| Mains buffering time                     | > 20 ms (120 V AC)<br>> 85 ms (230 V AC)         |
| Current consumption                      | typ. 2.19 A (100 V AC)<br>typ. 1.13 A (240 V AC) |
| Nominal power consumption                | 206.3 VA   |
| Protective circuit                       | Transient surge protection; Varistor             |
| Power factor (cos phi)                   | 0.54   |
| Typical response time                    | < 1 s  |
| Input fuse                               | 4 A (slow-blow, internal)                        |
| Recommended breaker for input protection | 6 A ... 16 A (Characteristics B, C, D, K)        |

### Output data

|  |  |
|--|--|
| Efficiency   | typ. 89 % (120 V AC)<br>typ. 89 % (230 V AC)   |
| Output characteristic                              | HICCUP   |
| Nominal output voltage                             | 15 V DC $\pm$ 1 %  |
| Nominal output current ( $I_N$ )                   | 6.67 A (-25 °C ... 55 °C)  |
| Derating   | 55 °C ... 70 °C (2.5%/K)   |
| Feedback voltage resistance                        | < 25 V DC  |
| Protection against overvoltage at the output (OVP) | $\leq$ 25 V DC   |
| Control deviation                                  | < 1 % (change in load, static 10 % ... 90 %)<br>< 4 % (Dynamic load change 10 % ... 90 %, 10 Hz)<br>< 0.1 % (change in input voltage $\pm$ 10 %) |
| Residual ripple                                    | < 75 mV <sub>PP</sub> (with nominal values)  |
| Short-circuit-proof                                | yes  |
| Output power                                       | 100 W  |
| Maximum no-load power dissipation                  | < 0.4 W  |
| Power loss nominal load max.                       | < 12 W   |
| Rise time  | < 0.5 s ( $U_{OUT}$ (10 % ... 90 %))   |
| Response time                                      | < 2 ms   |
| Connection in parallel                             | yes, for redundancy and increased capacity   |
| Connection in series                               | yes  |

# UNO-PS/1AC/15DC/100W - Power supply unit



2903002

<https://www.phoenixcontact.com/in/products/2903002>

## Connection data

### Input

|  |                     |
|--|---------------------|
| Connection method  | Screw connection    |
| Conductor cross section, rigid min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section, rigid max.  | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max.  | 2.5 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min.    | 0.2 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max.    | 2.5 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.2 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.   | 24                  |
| Conductor cross section AWG max.   | 14                  |
| Stripping length   | 8 mm                |
| Screw thread   | M3                  |
| Tightening torque, min   | 0.5 Nm              |
| Tightening torque max  | 0.6 Nm              |

### Output

|  |                     |
|--|---------------------|
| Connection method  | Screw connection    |
| Conductor cross section, rigid min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section, rigid max.  | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max.  | 2.5 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min.    | 0.2 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max.    | 2.5 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.2 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.   | 24                  |
| Conductor cross section AWG max.   | 14                  |
| Stripping length   | 8 mm                |
| Tightening torque, min   | 0.5 Nm              |
| Tightening torque max  | 0.6 Nm              |

## Signaling

|                    |     |
|--------------------|-----|
| Types of signaling | LED |
|--------------------|-----|

## Electrical properties

# UNO-PS/1AC/15DC/100W - Power supply unit



2903002

<https://www.phoenixcontact.com/in/products/2903002>

|                                 |                        |
|---------------------------------|------------------------|
| Number of phases                | 1.00                   |
| Insulation voltage input/output | 4 kV AC (type test)    |
|                                 | 3 kV AC (routine test) |

## Product properties

|                            |                    |
|----------------------------|--------------------|
| Product type               | Power supply       |
| Product family             | UNO POWER          |
| MTBF (IEC 61709, SN 29500) | > 727000 h (40 °C) |

## Insulation characteristics

|                     |                                |
|---------------------|--------------------------------|
| Protection class    | II (in closed control cabinet) |
| Degree of pollution | 2                              |

## Dimensions

|        |       |
|--------|-------|
| Width  | 55 mm |
| Height | 90 mm |
| Depth  | 84 mm |

## Installation dimensions

|                                  |               |
|----------------------------------|---------------|
| Installation distance right/left | 0 mm / 0 mm   |
| Installation distance top/bottom | 30 mm / 30 mm |

## Mounting

|                         |  |
|-------------------------|--|
| Mounting type           | DIN rail mounting                              |
| Assembly instructions   | alignable: 0 mm horizontally, 30 mm vertically |
| Mounting position       | horizontal DIN rail NS 35, EN 60715            |
| With protective coating | No   |

## Material specifications

|  |                        |
|--|------------------------|
| Flammability rating according to UL 94 (housing / terminal blocks) | V0                     |
| Housing material   | Plastic                |
| Foot latch material  | POM (Polyoxymethylene) |
| Housing material   | Polycarbonate          |

## Environmental and real-life conditions

### Ambient conditions

|  |   |
|--|---|
| Degree of protection                           | IP20  |
| Ambient temperature (operation)                | -25 °C ... 70 °C (> 55 °C Derating: 2.5 %/K)                      |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C  |
| Climatic class                                 | 3K22 (in accordance with EN 60721-3-3)                            |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing)                                 |
| Shock  | 18 ms, 30g, in each space direction (according to IEC 60068-2-27) |
|  | 15 Hz ... 150 Hz, 2.3g, 90 min.                                   |
| Vibration (operation)                          | < 15 Hz, amplitude ±2.5 mm (according to IEC 60068-2-6)           |

## Standards and regulations

|  |  |
|--|--|
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV)                 |
| Standard – Limitation of mains harmonic currents   | EN 61000-3-2                             |
| Standard - Electrical safety   | IEC 62368-1 (SELV)                       |
| Standard – Safety extra-low voltage  | IEC 62368-1 (SELV) und EN 60204-1 (PELV) |
| Standard - Safe isolation  | DIN VDE 0100-410                         |
| Standard - Safety of transformers  | EN 61558-2-16                            |
| Approval - requirement of the semiconductor industry with regard to mains voltage dips   | EN 61000-4-11                            |

## Approvals

|              |  |
|--------------|--|
| CSA          | CAN/CSA-C22.2 No. 60950-1-07   |
|              | CSA-C22.2 No. 107.1-01   |
|              | CAN/CSA-C22.2 No. 213 Class I, Division 2, Groups A, B, C, D T4A (Hazardous Location)            |
| UL approvals | UL/C-UL listed UL 508  |
|              | UL/C-UL Listed ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D T4A (Hazardous Location) |
|              | UL/C-UL Recognized UL 60950-1  |

## Conformity/Approvals

|                                  |   |
|----------------------------------|---|
| SIL in accordance with IEC 61508 | 0 |
|----------------------------------|---|

## EMC data

|                                     |   |
|-------------------------------------|---|
| Low Voltage Directive               | Conformance with Low Voltage Directive 2014/35/EC |
| EMC requirements for noise emission | EN 61000-6-3                                      |
|                                     | EN 61000-6-4                                      |
| EMC requirements for noise immunity | EN 61000-6-1                                      |
|                                     | EN 61000-6-2                                      |
| Electromagnetic compatibility       | Conformance with EMC Directive 2014/30/EU         |

## Electrostatic discharge

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

## Electrostatic discharge

|                   |                     |
|-------------------|---------------------|
| Contact discharge | 6 kV (Test Level 3) |
| Discharge in air  | 8 kV (Test Level 3) |
| Comments          | Criterion B         |

## Electromagnetic HF field

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

## Electromagnetic HF field

|                     |                       |
|---------------------|-----------------------|
| Frequency range     | 80 MHz ... 1 GHz      |
| Test field strength | 10 V/m (Test Level 3) |
| Frequency range     | 1 GHz ... 6 GHz       |

# UNO-PS/1AC/15DC/100W - Power supply unit



2903002

<https://www.phoenixcontact.com/in/products/2903002>

|                     |                       |
|---------------------|-----------------------|
| Test field strength | 10 V/m (Test Level 3) |
| Comments            | Criterion A           |

## Fast transients (burst)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

## Fast transients (burst)

|          |                                    |
|----------|------------------------------------|
| Input    | 4 kV (Test Level 4 - asymmetrical) |
| Output   | 2 kV (Test Level 3 - asymmetrical) |
| Comments | Criterion B                        |

## Surge voltage load (surge)

|                       |                                    |
|-----------------------|------------------------------------|
| Standards/regulations | EN 61000-4-5                       |
| Input                 | 2 kV (Test Level 3 - symmetrical)  |
|                       | 4 kV (Test Level 4 - asymmetrical) |
| Output                | 1 kV (Test Level 2 - symmetrical)  |
|                       | 2 kV (Test Level 3 - asymmetrical) |
| Comments              | Criterion B                        |

## Conducted interference

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

## Conducted interference

|                 |                     |
|-----------------|---------------------|
| Input/Output    | asymmetrical        |
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments        | Criterion A         |
| Voltage         | 10 V (Test Level 3) |

## Voltage dips

|                       |               |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-11 |
| Voltage               | 230 V AC      |
| Frequency             | 50 Hz         |
| Voltage dip           | 70 %          |
| Number of periods     | 25 periods    |
| Additional text       | Class 3       |
| Comments              | Criterion A   |
| Voltage dip           | 40 %          |
| Number of periods     | 10 periods    |
| Additional text       | Class 3       |
| Comments              | Criterion A   |
| Voltage dip           | 0 %           |
| Number of periods     | 1 period      |
| Additional text       | Class 3       |
| Comments              | Criterion A   |

## Emitted interference

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-6-3 |
|-----------------------|--------------|

# UNO-PS/1AC/15DC/100W - Power supply unit



2903002

<https://www.phoenixcontact.com/in/products/2903002>

|  |  |
|--|--|
| Radio interference voltage in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |
| Emitted radio interference in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |

## Criteria

|             |  |
|-------------|--|
| Criterion A | Normal operating behavior within the specified limits.                               |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |

# UNO-PS/1AC/15DC/100W - Power supply unit




2903002

<https://www.phoenixcontact.com/in/products/2903002>

## Drawings

Block diagram

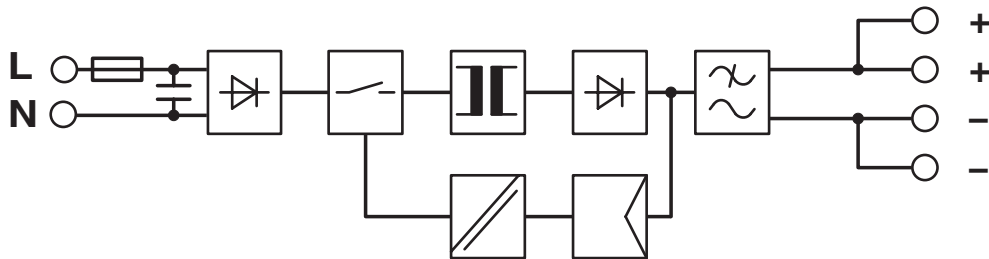



# UNO-PS/1AC/15DC/100W - Power supply unit



2903002

<https://www.phoenixcontact.com/in/products/2903002>

## Approvals



**cUL Recognized**  
Approval ID: FILE E 214596



**UL Recognized**  
Approval ID: FILE E 214596



**IECEE CB Scheme**  
Approval ID: DK-39228-A1-UL



**UL Listed**  
Approval ID: FILE E 123528



**cUL Listed**  
Approval ID: FILE E 123528



**UL Recognized**  
Approval ID: FILE E 214596



**IECEE CB Scheme**  
Approval ID: DK-39228-A1-UL



**cUL Recognized**  
Approval ID: FILE E 214596



**cUL Listed**  
Approval ID: FILE E 123528



**UL Listed**  
Approval ID: FILE E 123528



**cUL Listed**  
Approval ID: FILE E 199827



**UL Listed**  
Approval ID: FILE E 199827

# UNO-PS/1AC/15DC/100W - Power supply unit



2903002

<https://www.phoenixcontact.com/in/products/2903002>



**UL Listed**

Approval ID: FILE E 199827



**cUL Listed**

Approval ID: FILE E 199827

# UNO-PS/1AC/15DC/100W - Power supply unit



2903002

<https://www.phoenixcontact.com/in/products/2903002>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27040701 |
| ECLASS-13.0 | 27040701 |
| ECLASS-12.0 | 27040701 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002540 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

# UNO-PS/1AC/15DC/100W - Power supply unit



2903002

<https://www.phoenixcontact.com/in/products/2903002>

## Environmental Product Compliance

|            |  |
|------------|--|
| REACH SVHC | Lead 7439-92-1   |
| China RoHS | Environmentally Friendly Use Period = 25;  |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

# UNO-PS/1AC/15DC/100W - Power supply unit

2903002

<https://www.phoenixcontact.com/in/products/2903002>



## Accessories

### UNO-DIODE/5-24DC/2X10/1X20 - Redundancy module

2905489

<https://www.phoenixcontact.com/in/products/2905489>

Redundancy module, 5 V - 24 V DC, 2 x 10 A, 1 x 20 A.



---

### PLT-SEC-T3-230-FM-UT - Type 3 surge protection device

2907919

<https://www.phoenixcontact.com/in/products/2907919>

Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC



# UNO-PS/1AC/15DC/100W - Power supply unit

2903002

<https://www.phoenixcontact.com/in/products/2903002>



## PLT-SEC-T3-24-FM-UT - Type 3 surge protection device

2907916

<https://www.phoenixcontact.com/in/products/2907916>



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 24 V AC/DC

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)