

UNO-PS/350-900DC/24DC/60W - DC/DC converters



2906300

<https://www.phoenixcontact.com/in/products/2906300>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Primary-switched UNO DC/DC converter with wide range input, for DIN rail mounting, input: 350 ... 900 V DC, output: 24 V DC/60 W

Product Description

UNO DC/DC converters with basic functionality

With the DC/DC converters from the UNO POWER range, the control cabinet is supplied directly from the photovoltaic system. This saves installation costs and increases the efficiency of the system.

Your advantages

- Wide input voltage range
- Direct field installation
- Minimal space required in the control box
- Simplified startup
- UL 1741-certified DC/DC converter

Commercial Data

Item number	2906300
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CMD
Product Key	CMDU43
Catalog Page	Page 274 (C-4-2019)
GTIN	4055626062648
Weight per Piece (including packing)	316.9 g
Weight per Piece (excluding packing)	316.9 g
Customs tariff number	85044083
Country of origin	DE

Technical Data

Input data

DC operation

Nominal input voltage range	350 V DC ... 900 V DC
Input voltage range	300 V DC ... 1000 V DC
Wide-range input	yes
Electric strength, max.	≤ 1050 V DC
Voltage type of supply voltage	DC
Inrush current	< 1 A (typical)
Inrush current integral (I^2t)	< 0.38 A ² s
Current consumption	0.19 A (350 V DC)
	0.07 A (1000 V DC)
Typical response time	< 1 s
Recommended breaker for input protection	1 A (Characteristic gPV or comparable)
Recommended fuse for input protection	1000 V DC

Output data

Efficiency	> 90 %
Output characteristic	U/I
Nominal output voltage	24 V DC ±1 %
Nominal output current (I_N)	2.5 A (-25 °C ... 55 °C)
Derating	55 °C ... 70 °C (2.5%/K)
Feedback voltage resistance	< 35 V DC
Protection against overvoltage at the output (OVP)	< 35 V DC
Control deviation	< 1 % (change in load, static 10 % ... 90 %)
	< 3 % (Dynamic load change 10 % ... 90 %, 10 Hz)
	< 0.1 % (change in input voltage ±10 %)
Residual ripple	< 20 mV _{PP} (with nominal values)
Output power	60 W
Maximum no-load power dissipation	< 0.5 W
Power loss nominal load max.	< 6.5 W
Rise time	< 1 s (U_{OUT} (10 % ... 90 %))
Response time	< 2 ms
Connection in parallel	yes, for redundancy and increased capacity
Connection in series	No

Signal: DC OK active

Output description	$U_{OUT} > 0.9 \times U_N$: High signal
--------------------	--

Connection data

Input

Connection method	Screw connection
-------------------	------------------

UNO-PS/350-900DC/24DC/60W - DC/DC converters



2906300

<https://www.phoenixcontact.com/in/products/2906300>

Conductor cross section, rigid min.	0.2 mm ²
Conductor cross section, rigid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

Output

Connection method	Screw connection
Conductor cross section, rigid min.	0.2 mm ²
Conductor cross section, rigid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

Signaling

Types of signaling	LED
--------------------	-----

Signal output: DC OK active

Status display	"DC OK" LED green
----------------	-------------------

Electrical properties

Number of phases	1.00
Insulation voltage input/output	8 kV DC (type test)
	3 kV DC (routine test)
	8 kV

Product properties

Product type	DC/DC converters
Product family	UNO POWER
MTBF (IEC 61709, SN 29500)	> 1160000 h (40 °C)

Insulation characteristics

Protection class	II
Degree of pollution	2

Dimensions

UNO-PS/350-900DC/24DC/60W - DC/DC converters



2906300

<https://www.phoenixcontact.com/in/products/2906300>

Width	55 mm
Height	90 mm
Depth	84 mm

Installation dimensions

Installation distance right/left	0 mm / 0 mm ($\leq 70\text{ }^{\circ}\text{C}$)
Installation distance top/bottom	30 mm / 30 mm ($\leq 70\text{ }^{\circ}\text{C}$)

Mounting

Mounting type	DIN rail mounting
Assembly instructions	alignable: 0 mm horizontally, 30 mm vertically
Mounting position	horizontal DIN rail NS 35, EN 60715
With protective coating	No

Material specifications

Flammability rating according to UL 94 (housing / terminal blocks)	V0
Housing material	Plastic
Foot latch material	POM (Polyoxymethylene)
Housing material	Polycarbonate

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (> 55° C derating : 2.5%/K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (start-up type tested)	-40 °C
Climatic class	3K3 (in acc. with EN 60721)
Max. permissible relative humidity (operation)	$\leq 95\%$ (at 25 °C, non-condensing)
Shock	18 ms, 30g, in each space direction (according to IEC 60068-2-27)
Vibration (operation)	< 15 Hz, amplitude ± 2.5 mm (according to IEC 60068-2-6) 15 Hz ... 150 Hz, 2.3g, 90 min.

Standards and regulations

Standard – Limitation of mains harmonic currents	EN 61000-3-2
Standard - Electrical safety	IEC 62109-1
Standard – Safety extra-low voltage	IEC 60950-1 (SELV) and EN 60204-1 (PELV)
Standard - Safe isolation	DIN VDE 0100-410
Standard - Safety of power converters for use in photovoltaic power systems	IEC 62109-1
Approval - requirement of the semiconductor industry with regard to mains voltage dips	EN 61000-4-11

Overvoltage category

IEC 62109-1	II
-------------	----

2906300

<https://www.phoenixcontact.com/in/products/2906300>

Approvals

UL approvals	UL 1741
--------------	---------

Conformity/Approvals

SIL in accordance with IEC 61508	0
----------------------------------	---

EMC data

Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
EMC requirements for noise emission	EN 61000-6-3
	EN 61000-6-4
EMC requirements for noise immunity	EN 61000-6-1
	EN 61000-6-2
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	6 kV (Test Level 3)
Discharge in air	8 kV (Test Level 3)
Comments	Criterion B

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Frequency range	80 MHz ... 1 GHz
Test field strength	10 V/m
Frequency range	1 GHz ... 2 GHz
Test field strength	10 V/m
Frequency range	2 GHz ... 3 GHz
Test field strength	10 V/m
Comments	Criterion A

Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

Fast transients (burst)

Input	4 kV (Test Level 4 - asymmetrical)
Output	2 kV (Test Level 3 - asymmetrical)
Comments	Criterion B

Surge voltage load (surge)

Standards/regulations	EN 61000-4-5
Input	2 kV (Test Level 3 - symmetrical)
	4 kV (Test Level 4 - asymmetrical)
Output	1 kV (Test Level 2 - symmetrical)

UNO-PS/350-900DC/24DC/60W - DC/DC converters




2906300

<https://www.phoenixcontact.com/in/products/2906300>

	2 kV (Test Level 3 - asymmetrical)
Comments	Criterion B
Conducted interference	
Standards/regulations	EN 61000-4-6
Conducted interference	
Frequency range	10 kHz ... 80 MHz
Comments	Criterion A
Voltage	10 V (Test Level 3)
Voltage dips	
Standards/regulations	EN 61000-4-11
Emitted interference	
Standards/regulations	EN 61000-6-3
Radio interference voltage in acc. with EN 55011	EN 55011 (EN 55022) Class B, area of application: Industry and residential
Emitted radio interference in acc. with EN 55011	EN 55011 (EN 55022) Class B, area of application: Industry and residential
Criteria	
Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

Drawings

Block diagram

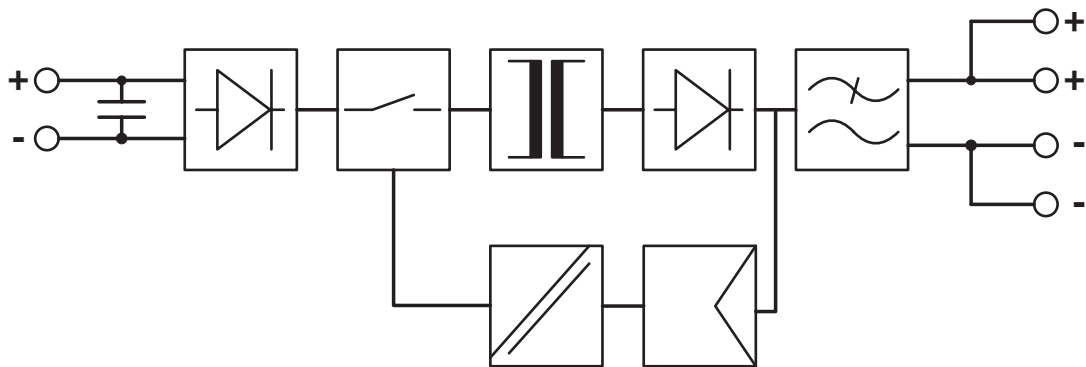

2906300

<https://www.phoenixcontact.com/in/products/2906300>

Approvals



cUL Recognized
Approval ID: FILE E 476951



UL Recognized
Approval ID: FILE E 476951



IECEE CB Scheme
Approval ID: US-27376-M1-UL



EAC
Approval ID: RU S-DE.BL08.W.00764



EAC
Approval ID: RU S-DE.BL08.W.00764



UL Recognized
Approval ID: FILE E 476951



IECEE CB Scheme
Approval ID: US-27376-M1-UL



cUL Recognized
Approval ID: FILE E 476951



EAC
Approval ID: RU S-DE.BL08.W.00764



EAC
Approval ID: RU S-DE.BL08.W.00764

UNO-PS/350-900DC/24DC/60W - DC/DC converters



2906300

<https://www.phoenixcontact.com/in/products/2906300>

Classifications

ECLASS

ECLASS-11.0	27040701
ECLASS-13.0	27040701
ECLASS-12.0	27040701

ETIM

ETIM 8.0	EC002540
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

UNO-PS/350-900DC/24DC/60W - DC/DC converters



2906300

<https://www.phoenixcontact.com/in/products/2906300>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 25;
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

UNO-PS/350-900DC/24DC/60W - DC/DC converters



2906300

<https://www.phoenixcontact.com/in/products/2906300>

Accessories

UNO-DIODE/5-24DC/2X10/1X20 - Redundancy module

2905489

<https://www.phoenixcontact.com/in/products/2905489>

Redundancy module, 5 V - 24 V DC, 2 x 10 A, 1 x 20 A.



UK 10,3-HESI 1000V - Fuse holder

3211236

<https://www.phoenixcontact.com/in/products/3211236>



Fuse holder, fuse type: Glass / ceramics / ..., fuse type: gPV 10.3 x 38 mm in accordance with 60269-6, nom. voltage: 1000 V, nominal current: 30 A, connection method: Screw connection, Rated cross section: 16 mm², cross section: 1.5 mm²- 25 mm², mounting type: NS 35/7,5, NS 35/15, color: black

UNO-PS/350-900DC/24DC/60W - DC/DC converters



2906300

<https://www.phoenixcontact.com/in/products/2906300>

PLT-SEC-T3-24-FM-UT - Type 3 surge protection device

2907916

<https://www.phoenixcontact.com/in/products/2907916>



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 24 V AC/DC

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in