

# MINI-PS-100-240AC/24DC/1 - Power supply unit



2938840

<https://www.phoenixcontact.com/in/products/2938840>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Please use the following items in new systems: 2904597 or 2909575  
DIN rail power supply, 24 V DC/1 A, primary-switched, narrow design

## Commercial data

Item number	2938840
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CMP
Product key	CMPM13
Catalog page	Page 38 (IF-2005)
GTIN	4017918927097
Weight per piece (including packing)	247.5 g
Weight per piece (excluding packing)	200 g
Customs tariff number	85044030
Country of origin	CN

# MINI-PS-100-240AC/24DC/1 - Power supply unit



2938840

<https://www.phoenixcontact.com/in/products/2938840>

## Technical data

### Input data

#### AC operation

Nominal input voltage range	100 V AC ... 240 V AC
Input voltage range	85 V AC ... 264 V AC 90 V DC ... 350 V DC
Input voltage range AC	85 V AC ... 264 V AC
Input voltage range DC	90 V DC ... 350 V DC
Voltage type of supply voltage	AC/DC
Inrush current	< 15 A (typical)
AC frequency range	45 Hz ... 65 Hz
Frequency range DC	0 Hz
Mains buffering time	> 20 ms (120 V AC) > 110 ms (230 V AC)
Current consumption	0.5 A (85 V AC) 0.2 A (264 V AC) approx. 0.4 A (90 V DC) approx. 0.1 A (350 V DC)
Nominal power consumption	45 VA
Typical response time	< 0.2 s
Input fuse	1.25 A (slow-blow, internal)

### Output data

Efficiency	> 80 % (for 230 V AC and nominal values)
Output characteristic	U/I
Nominal output voltage	24 V DC $\pm$ 1 %
Setting range of the output voltage ( $U_{Set}$ )	22.5 V DC ... 28.5 V DC (> 24 V DC, constant capacity restricted)
Nominal output current ( $I_N$ )	1 A (up to 60 °C)
POWER BOOST ( $I_{Boost}$ )	1.3 A
Residual ripple	< 100 mV <sub>PP</sub>
Output power	24 W
Peak switching voltages nominal load	< 100 mV <sub>PP</sub> (20 MHz)
Maximum no-load power dissipation	< 1.4 W
Power loss nominal load max.	< 4.5 W
Connection in parallel	yes, for assembling redundant systems and increasing efficiency
Connection in series	yes

#### Signal: Active

Output description	$U_{OUT} > 21.5$ V: High signal
Output voltage	+ 24 V (Signal)
Continuous load current	max. 20 mA

# MINI-PS-100-240AC/24DC/1 - Power supply unit



2938840

<https://www.phoenixcontact.com/in/products/2938840>

## Connection data

### Input

Connection method	Pluggable screw connection
Conductor cross section, rigid min.	0.2 mm <sup>2</sup>
Conductor cross section, rigid max.	2.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	7 mm
Screw thread	M3

### Output

Connection method	Pluggable screw connection
Conductor cross section, rigid min.	0.2 mm <sup>2</sup>
Conductor cross section, rigid max.	2.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	7 mm

## Signaling

Operating voltage display	Green LED
---------------------------	-----------

### Signal output: Active

Status display	Green LED ( $U_{out} > 21,5$ V DC: LED permanently lit)
----------------	---------------------------------------------------------

## Electrical properties

Number of phases	1.00
Insulation voltage input/output	3 kV (routine test)
	3 kV (type test)

## Product properties

Product type	Power supply
Product family	MINI POWER
MTBF (IEC 61709, SN 29500)	> 500000 h

### Insulation characteristics

Protection class	II (in closed control cabinet)
Overvoltage category	III

## Dimensions

Width	22.5 mm
Height	99 mm

# MINI-PS-100-240AC/24DC/1 - Power supply unit



2938840

<https://www.phoenixcontact.com/in/products/2938840>

Depth	114.5 mm
-------	----------

## Installation dimensions

Installation distance right/left	0 mm / 0 mm
Installation distance top/bottom	50 mm / 50 mm

## Mounting

Assembly note	alignable: vertical with spacing = 5 cm, horizontal with zero spacing
Mounting position	On horizontal DIN rail NS 35 in acc. with EN 60715
With protective coating	No

## Material specifications

Housing material	Plastic
Type of housing	Polyamide PA, color: green

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	95 % (at 25 °C, non-condensing)

## Standards and regulations

Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
Standard - Safe isolation	DIN VDE 0100-410

## Approvals

UL approvals	UL/C-UL Listed ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D
--------------	-------------------------------------------------------------------------

### Conformity/Approvals

SIL in accordance with IEC 61508	0
----------------------------------	---

## EMC data

EMC requirements for noise emission	EN 61000-6-3
	EN 61000-6-4
EMC requirements for noise immunity	EN 61000-6-1
	EN 61000-6-2
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Noise emission	EN 55011 (EN 55022)

# MINI-PS-100-240AC/24DC/1 - Power supply unit




2938840


<https://www.phoenixcontact.com/in/products/2938840>

## Drawings

Block diagram

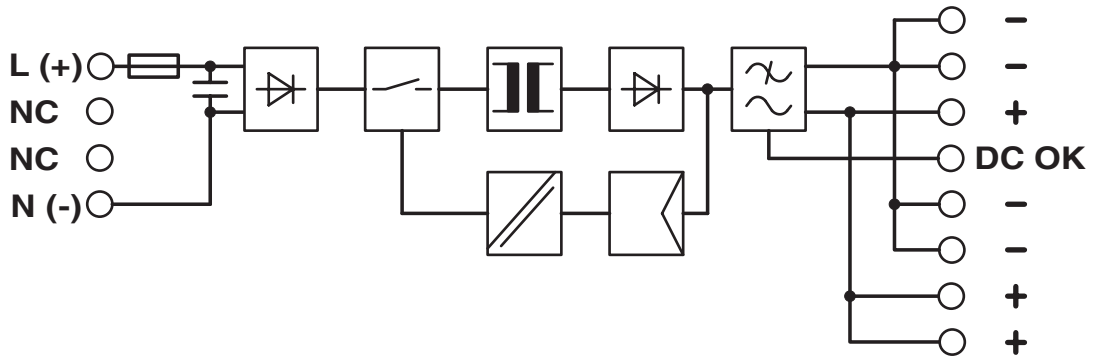

Diagram

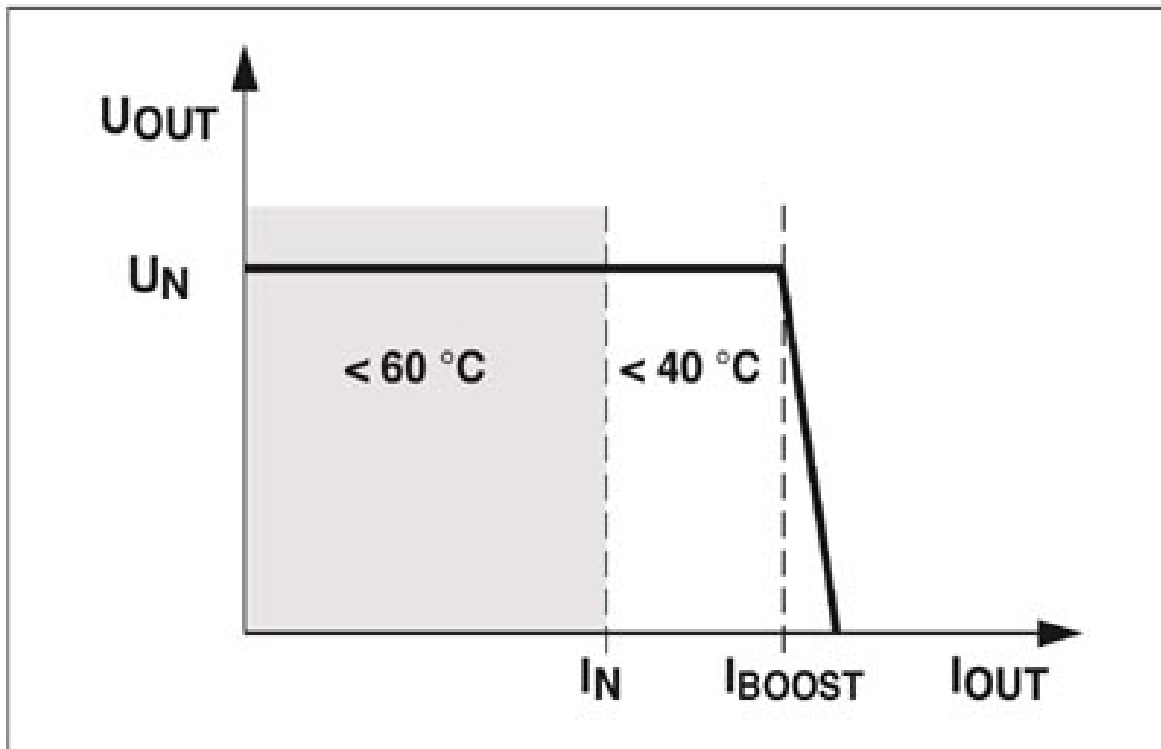

POWER BOOST

# MINI-PS-100-240AC/24DC/1 - Power supply unit



2938840

<https://www.phoenixcontact.com/in/products/2938840>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/2938840>



**cUL Recognized**  
Approval ID: FILE E 211944



**UL Recognized**  
Approval ID: E211944



**EAC**  
Approval ID: EAC-Zulassung



**UL Recognized**  
Approval ID: E211944



**EAC**  
Approval ID: RU S-DE.BL08.W.00764



**UL Listed**  
Approval ID: FILE E 123528



**cUL Recognized**  
Approval ID: FILE E 211944



**cUL Listed**  
Approval ID: FILE E 123528



**cUL Listed**  
Approval ID: FILE E 123528



**UL Listed**  
Approval ID: FILE E 123528



**EAC**  
Approval ID: RU S-DE.BL08.W.00764

# MINI-PS-100-240AC/24DC/1 - Power supply unit



2938840

<https://www.phoenixcontact.com/in/products/2938840>

## CoC / Compliance Statement

Approval ID: 17-127-00



### cUL Listed

Approval ID: E199827



### UL Listed

Approval ID: E199827

## cULus Listed



# MINI-PS-100-240AC/24DC/1 - Power supply unit



2938840

<https://www.phoenixcontact.com/in/products/2938840>

## Classifications

### ECLASS

ECLASS-11.0

27040701

### ETIM

ETIM 8.0

EC002540

### UNSPSC

UNSPSC 21.0

39121000

# MINI-PS-100-240AC/24DC/1 - Power supply unit



2938840

<https://www.phoenixcontact.com/in/products/2938840>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-25
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7d38469f-1fcf-41dd-9821-03d6a666da89

# MINI-PS-100-240AC/24DC/1 - Power supply unit



2938840

<https://www.phoenixcontact.com/in/products/2938840>

## Accessories

### PLT-SEC-T3-230-FM-UT - Type 3 surge protection device

2907919

<https://www.phoenixcontact.com/in/products/2907919>



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC

---

### TTC-6P-T3-24DC-PT-I - Type 3 surge protection device

1027586

<https://www.phoenixcontact.com/in/products/1027586>



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator for 24 V DC power supplies

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)