

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Disconnect terminal block, With test socket screws for insertion of test plugs, nom. voltage: 1000 V, nominal current: 41 A, 1 level, connection method: Bolt connection, Rated cross section: 6 mm<sup>2</sup>, mounting: NS 35/7,5, NS 35/15, NS 32, color: gray

## Commercial Data

Item number	3001269
Packing unit	50 pc
Minimum order quantity	50 pc
Sales Key	BE4
Product Key	BE4533
Catalog Page	Page 567 (C-1-2019)
GTIN	4046356860406
Weight per Piece (including packing)	32.38 g
Weight per Piece (excluding packing)	32 g
Customs tariff number	85369010
Country of origin	IN

## Technical Data

### Product properties

Product type	Bolt connection terminal block
Number of connections	2
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	1.31 W

### Connection data

Number of connections per level	2
Nominal cross section	6 mm <sup>2</sup>

#### 1 level

Stripping length	The stripping length depends on the specification provided by the cable lug manufacturer.
Connection in acc. with standard	IEC 60947-7-1
Nominal current	41 A
Maximum load current	41 A (with 6 mm <sup>2</sup> conductor cross section)
Nominal voltage	1000 V (the nominal voltage applies to insulated cable lugs)
Nominal cross section	6 mm <sup>2</sup>

#### Cable lug connection DIN 46234:1980-03

Connection in acc. with standard	DIN 46234:1980-03
Cross section	0.1 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Cross section range AWG	(converted acc. to IEC)
Hole diameter	4.3 mm
Width	9.6 mm
Bolt diameter	4 mm
Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Identification color of ring cable lugs : red	1.5 mm <sup>2</sup>
Identification color of ring cable lugs : blue	2.5 mm <sup>2</sup>
Identification color of ring cable lugs : yellow	6 mm <sup>2</sup>
Connection in acc. with standard	DIN 46237:1970-07
Cross section	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Cross section range AWG	(converted acc. to IEC)
Hole diameter	4.3 mm

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

Width	9.6 mm
Bolt diameter	4 mm
Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm

## Dimensions

Width	11 mm
End cover width	1.5 mm
Height NS 35/15	59.5 mm
Height NS 35/7,5	52 mm
Height NS 32	57 mm
Length	79.2 mm

## Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Surge voltage test

Test voltage setpoint	9.8 kV
Result	Test passed

### Temperature-rise test

Requirement temperature-rise test	Increase in temperature $\leq$ 45 K
Result	Test passed
Short-time withstand current 6 mm <sup>2</sup>	0.72 kA
Result	Test passed

### Power-frequency withstand voltage

Test voltage setpoint	2.2 kV
Result	Test passed

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## Mechanical properties

### Mechanical data

Open side panel	Yes
-----------------	-----

## Mechanical tests

### Mechanical strength

Result	Test passed
--------	-------------

### Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	5 N
Result	Test passed

## Environmental and real-life conditions

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32
Screw thread	M4

# OTTA 6-T/SB-P/P - Disconnect terminal block




3001269

<https://www.phoenixcontact.com/in/products/3001269>

## Drawings

Schematic diagram

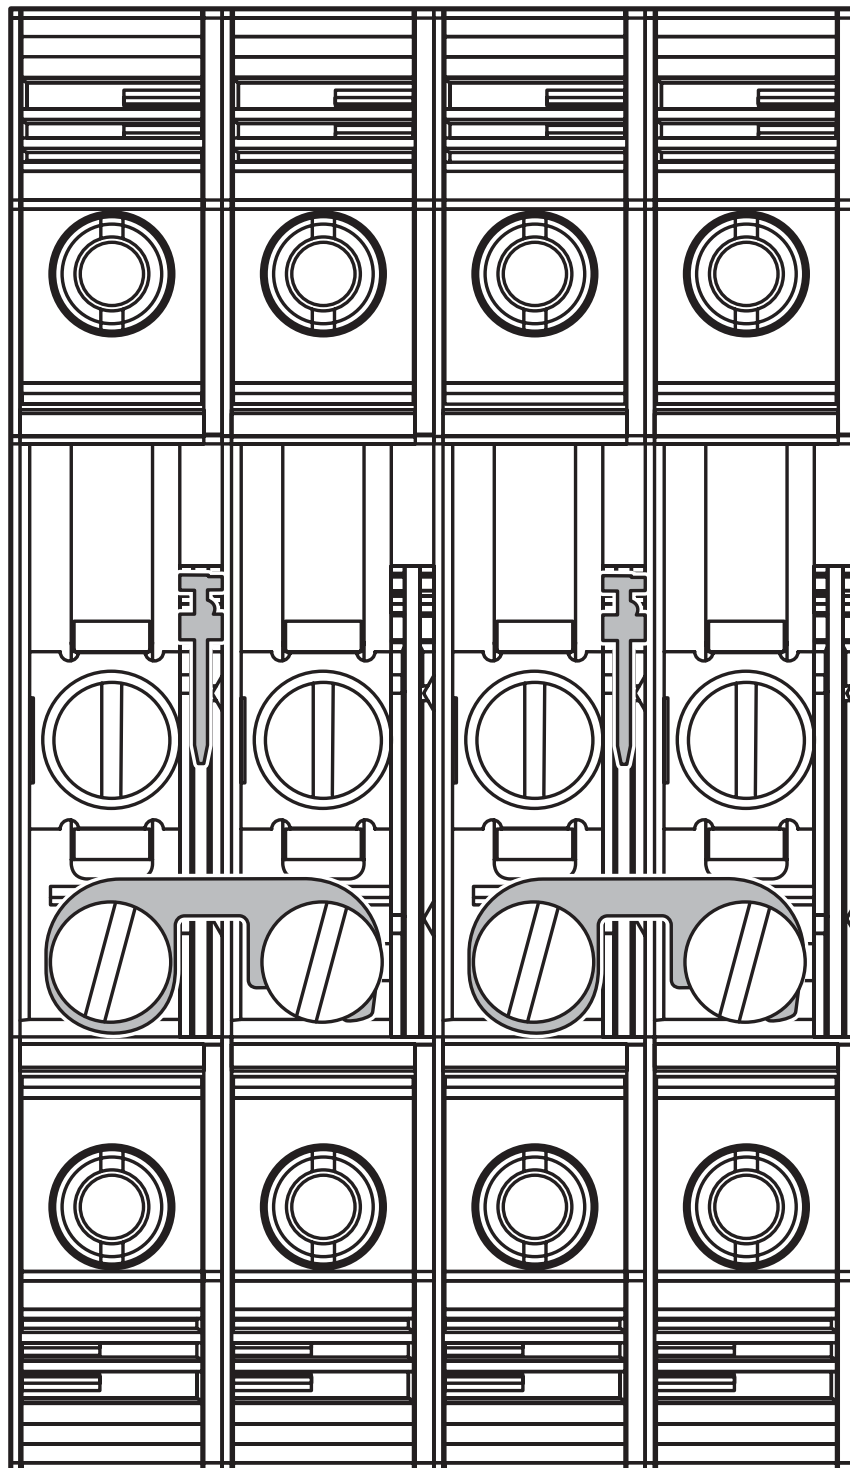

Closed switching jumpers


# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

Schematic diagram

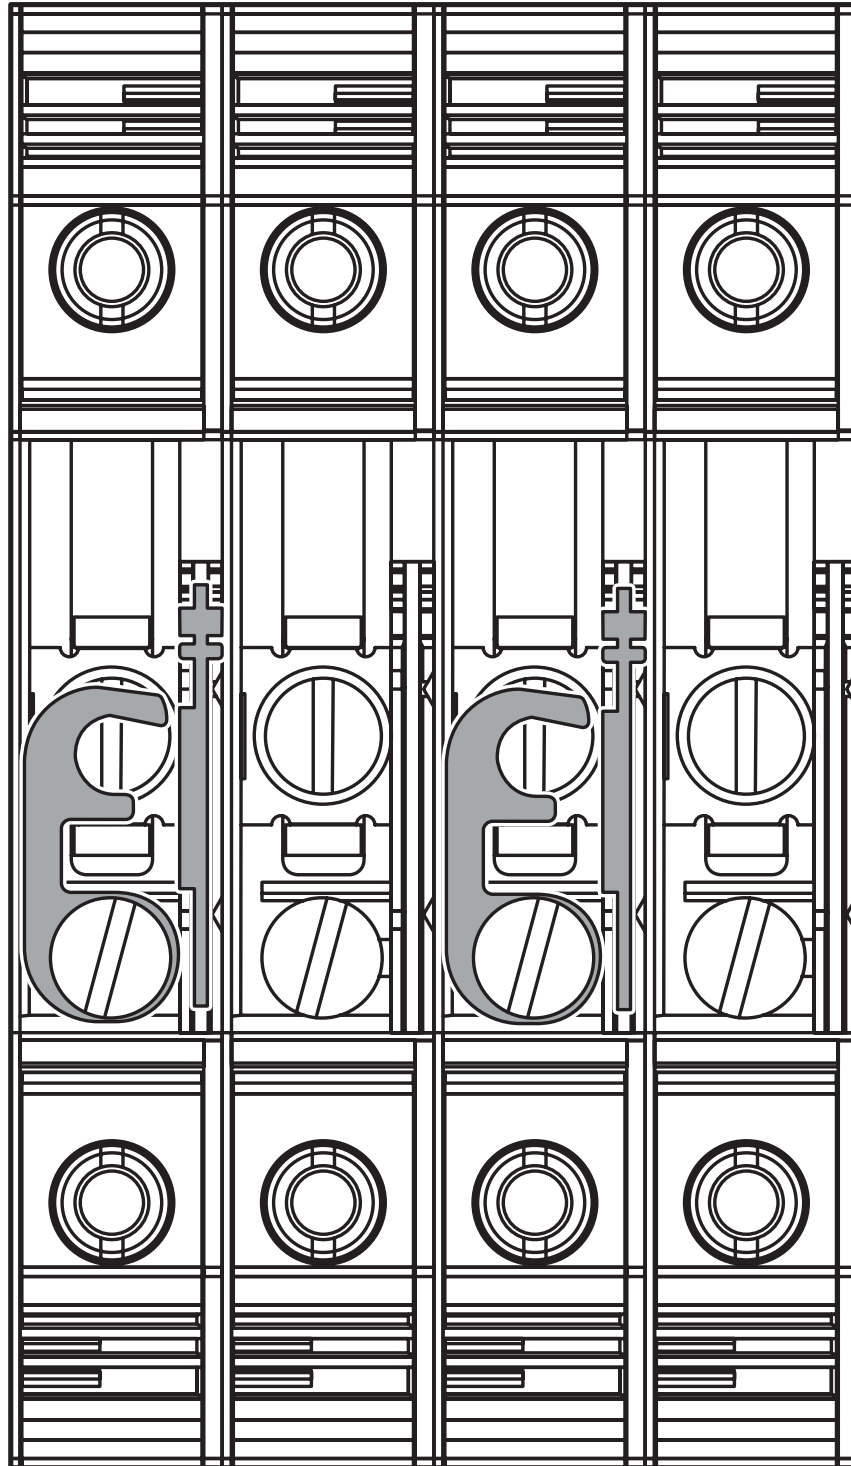

Open switching jumpers

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

Circuit diagram





# OTTA 6-T/SB-P/P - Disconnect terminal block




3001269


<https://www.phoenixcontact.com/in/products/3001269>


## Approvals

 <b>IECEE CB Scheme</b> Approval ID: DE1-64022				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $mm^2$
	1000 V	41 A	-	0.2 - 6

 <b>EAC</b> Approval ID: RU C-DE.AI30.B.01102				
---	--	--	--	--

 <b>VDE Zeichengenehmigung</b> Approval ID: 40017896				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $mm^2$
	1000 V	41 A	-	0.2 - 6

 <b>cULus Recognized</b> Approval ID: E60425				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $mm^2$
Use group B	600 V	30 A	-	-
Use group C	600 V	30 A	-	-

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00540				
---	--	--	--	--

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## Classifications

### ECLASS

ECLASS-11.0	27141126
ECLASS-12.0	27141126

### ETIM

ETIM 8.0	EC000902
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>

## Accessories

 Note: Applying some accessories below might limit this product.

### EB 2-OTTA 6 - Insertion bridge

0790608

<https://www.phoenixcontact.com/in/products/0790608>

Insertion bridge, pitch: 11 mm, number of positions: 2, color: gray



 Max. current carrying capacity: 36 A

---

### EB 3-OTTA 6 - Insertion bridge

3026036

<https://www.phoenixcontact.com/in/products/3026036>

Insertion bridge, pitch: 11.1 mm, number of positions: 3, color: gray



 Max. current carrying capacity: 36 A

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>


## EB 4-OTTA 6 - Insertion bridge

3026049

<https://www.phoenixcontact.com/in/products/3026049>

Insertion bridge, pitch: 11.1 mm, number of positions: 4, color: gray



 Max. current carrying capacity: 36 A

---


## EB 5-OTTA 6 - Insertion bridge

3026050

<https://www.phoenixcontact.com/in/products/3026050>

Insertion bridge, pitch: 11.1 mm, number of positions: 5, color: gray



 Max. current carrying capacity: 36 A

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>


## EB 7-OTTA 6 - Insertion bridge

3026052

<https://www.phoenixcontact.com/in/products/3026052>

Insertion bridge, pitch: 11.1 mm, number of positions: 7, color: gray



 Max. current carrying capacity: 36 A

---


## EB 10- OTTA 6 - Insertion bridge

0790420

<https://www.phoenixcontact.com/in/products/0790420>

Insertion bridge, pitch: 11.1 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 36 A

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>


## USBR 2-11 - Switching jumper

3001356

<https://www.phoenixcontact.com/in/products/3001356>



Switching jumper, number of positions: 2, color: silver

 Max. current carrying capacity: 36 A

---

## D-OTTA/RBO-SB - End cover

3001355

<https://www.phoenixcontact.com/in/products/3001355>

End cover, length: 79.2 mm, width: 1.5 mm, height: 40.8 mm, color: gray



# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>



## SZG 0,9X6,5 VDE - Screwdriver

1205134

<https://www.phoenixcontact.com/in/products/1205134>



Screwdriver, slot-headed, graded, for test socket screws, size: 0.9 x 6.5 x 175 mm, 2-component grip, with non-slip grip

---

## TS-UT 6-T/SP - Separating plate

3072821

<https://www.phoenixcontact.com/in/products/3072821>



Separating plate, length: 105.2 mm, width: 1 mm, height: 67.5 mm, color: gray



# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## KSS 10 - Short-circuit connector

0310541

<https://www.phoenixcontact.com/in/products/0310541>



Short-circuit connector, pitch: 10 mm, number of positions: 2, color: black

---

## NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/in/products/1201002>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>



## NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/in/products/1201015>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

---

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/in/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>



## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/in/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/in/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/in/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/in/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>



## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/in/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/in/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>



## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/in/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/in/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/in/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/in/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>



## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/in/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

---

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/in/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)



# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/in/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/in/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/in/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/in/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>



## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/in/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



---

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/in/products/1201798>

DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)



# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## ZB 10:UNBEDRUCKT - Zack marker strip

1053001

<https://www.phoenixcontact.com/in/products/1053001>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10.5 x 10.15 mm, Number of individual labels: 10

---

## ZB 10 CUS - Zack marker strip

0824941

<https://www.phoenixcontact.com/in/products/0824941>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## ZB10,LGS:FORTL.ZAHLEN - Zack marker strip

1053014

<https://www.phoenixcontact.com/in/products/1053014>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

---

## ZB10,QR:FORTL.ZAHLEN - Zack marker strip

1053027

<https://www.phoenixcontact.com/in/products/1053027>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## ZB10,LGS:L1-N,PE - Marker for terminal blocks

1053412

<https://www.phoenixcontact.com/in/products/1053412>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

---

## ZB10,LGS:U-N - Marker for terminal blocks

1053438

<https://www.phoenixcontact.com/in/products/1053438>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## UC-TM 10 - Marker for terminal blocks

0818069

<https://www.phoenixcontact.com/in/products/0818069>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

---

## UC-TM 10 CUS - Marker for terminal blocks

0824605

<https://www.phoenixcontact.com/in/products/0824605>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## UCT-TM 10 - Marker for terminal blocks

0829142

<https://www.phoenixcontact.com/in/products/0829142>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36

---

## UCT-TM 10 CUS - Marker for terminal blocks

0829623

<https://www.phoenixcontact.com/in/products/0829623>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36



# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>

## CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/in/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

---

## CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/in/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

# OTTA 6-T/SB-P/P - Disconnect terminal block

3001269

<https://www.phoenixcontact.com/in/products/3001269>

## E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/in/products/0800886>

End clamp, width: 9.5 mm, color: gray



---

## E/UK - End clamp

1201442

<https://www.phoenixcontact.com/in/products/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



# OTTA 6-T/SB-P/P - Disconnect terminal block



3001269

<https://www.phoenixcontact.com/in/products/3001269>

## E/UK 1 - End clamp

1201413

<https://www.phoenixcontact.com/in/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)