

RSC 5-T E - Test disconnect terminal block



3059537

<https://www.phoenixcontact.com/in/products/3059537>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Test disconnect terminal block, nom. voltage: 500 V, nominal current: 41 A, 1 level, connection method: Bolt connection, Rated cross section: 10 mm², mounting: NS 35/7,5, NS 35/15, color: dark gray

Commercial Data

| | |
|--------------------------------------|---------------|
| Item number | 3059537 |
| Packing unit | 50 pc |
| Minimum order quantity | 1 pc |
| Sales Key | BE1 |
| Product Key | BE1533 |
| GTIN | 4046356500821 |
| Weight per Piece (including packing) | 99.99 g |
| Weight per Piece (excluding packing) | 99.99 g |
| Country of origin | IN |

RSC 5-T E - Test disconnect terminal block



3059537

<https://www.phoenixcontact.com/in/products/3059537>

Technical Data

Product properties

| | |
|-----------------------|--------------------------------|
| Product type | Bolt connection terminal block |
| Pitch | 13 mm |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 2 |

Electrical properties

| | |
|---------------------|------|
| Rated surge voltage | 6 kV |
|---------------------|------|

Connection data

| | |
|---------------------------------|-------------------|
| Number of connections per level | 2 |
| Nominal cross section | 6 mm ² |

1 level

| | |
|----------------------------------|---|
| Screw thread | M5 |
| Stripping length | The stripping length depends on the specification provided by the cable lug manufacturer. |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current | 41 A |
| Maximum load current | 50 A (with 10 mm ² conductor cross section) |
| Nominal voltage | 500 V |
| Nominal cross section | 10 mm ² |

Cable lug connection DIN 46234:1980-03

| | |
|----------------------------------|--|
| Connection in acc. with standard | DIN 46234:1980-03 |
| Cross section | 0.1 mm ² ... 10 mm ² |
| Cross section range AWG | 26 ... 8 (converted acc. to IEC) |
| Hole diameter | 5.3 mm |
| Width | 11 mm |
| Bolt diameter | 5 mm |
| Screw thread | M5 |
| Tightening torque | 2 ... 2.2 Nm |
| Connection in acc. with standard | DIN 46237:1970-07 |
| Cross section | 0.5 mm ² ... 6 mm ² |
| Cross section range AWG | 20 ... 10 (converted acc. to IEC) |
| Hole diameter | 5.3 mm |
| Width | 10 mm |
| Bolt diameter | 5 mm |

RSC 5-T E - Test disconnect terminal block



3059537

<https://www.phoenixcontact.com/in/products/3059537>

| | |
|--|---------------------|
| Screw thread | M5 |
| Tightening torque | 2 ... 22 Nm |
| Identification color of ring cable lugs : red | 1 mm ² |
| Identification color of ring cable lugs : blue | 2.5 mm ² |
| Identification color of ring cable lugs : yellow | 6 mm ² |

Dimensions

| | |
|------------------|---------|
| Width | 13 mm |
| End cover width | 2.2 mm |
| Height NS 35/15 | 57.3 mm |
| Height NS 35/7,5 | 49.8 mm |
| Length | 79.9 mm |
| Pitch | 13 mm |

Material specifications

| | |
|---|-----------|
| Color | dark gray |
| Flammability rating according to UL 94 | V2 |
| Insulating material group | I |
| Insulating material | PA |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 125 °C |

Electrical tests

Surge voltage test

| | |
|-----------------------|-------------|
| Test voltage setpoint | 9.8 kV |
| Result | Test passed |

Temperature-rise test

| | |
|---|--------------------------------|
| Requirement temperature-rise test | Increase in temperature ≤ 45 K |
| Result | Test passed |
| Short-time withstand current 10 mm ² | 1.2 kA |
| Result | Test passed |

Power-frequency withstand voltage

| | |
|-----------------------|-------------|
| Test voltage setpoint | 1.89 kV |
| Result | Test passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Mechanical tests

Mechanical strength

RSC 5-T E - Test disconnect terminal block



3059537

<https://www.phoenixcontact.com/in/products/3059537>

| | |
|---------------------------|-------------|
| Result | Test passed |
| Attachment on the carrier | |
| DIN rail/fixing support | NS 32/NS 35 |
| Test force setpoint | 5 N |
| Result | Test passed |

Environmental and real-life conditions

Needle-flame test

| | |
|------------------|-------------|
| Time of exposure | 30 s |
| Result | Test passed |

Oscillation/broadband noise

| | |
|------------------------|--|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Spectrum | Service life test category 2, bogie-mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level | $6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$ |
| Acceleration | 3.12g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

Shocks

| | |
|--------------------------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape | Half-sine |
| Acceleration | 30g |
| Shock duration | 18 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

RSC 5-T E - Test disconnect terminal block




3059537

<https://www.phoenixcontact.com/in/products/3059537>

Drawings

Circuit diagram

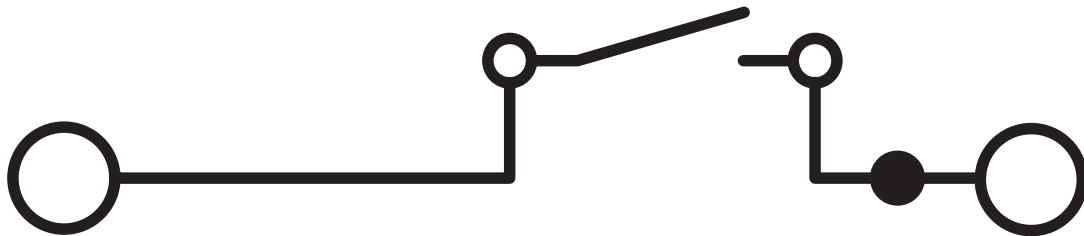


RSC 5-T E - Test disconnect terminal block




3059537

<https://www.phoenixcontact.com/in/products/3059537>

Approvals

|  UL Recognized Approval ID: FILE E 60425 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| Use group B | 600 V | 45 A | - | - |
| Use group C | 600 V | 45 A | - | - |

|  EAC Approval ID: RU C-DE.A*30.B.01742 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

RSC 5-T E - Test disconnect terminal block



3059537

<https://www.phoenixcontact.com/in/products/3059537>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141126 |
| ECLASS-12.0 | 27141126 |

ETIM

| | |
|----------|----------|
| ETIM 7.0 | EC000897 |
|----------|----------|

RSC 5-T E - Test disconnect terminal block



3059537

<https://www.phoenixcontact.com/in/products/3059537>

Environmental Product Compliance

| | |
|------------|--|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

Accessories

 Note: Applying some accessories below might limit this product.

FB 10-13 - Fixed bridge

3059126

<https://www.phoenixcontact.com/in/products/3059126>



Fixed bridge, pitch: 13 mm, number of positions: 10, color: silver

 Max. current carrying capacity: 41 A

FB 10-13 ISO - Fixed bridge

3059663

<https://www.phoenixcontact.com/in/products/3059663>



Fixed bridge, pitch: 13 mm, number of positions: 10, color: silver

 Max. current carrying capacity: 41 A

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>



TS-KK 3 - Separating plate

2770215

<https://www.phoenixcontact.com/in/products/2770215>



Separating plate, length: 14 mm, width: 0.5 mm, height: 16 mm, color: gray

SZS 1,0X6,5 VDE - Screwdriver

1205079

<https://www.phoenixcontact.com/in/products/1205079>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 6.5 x 150 mm, 2-component grip, with non-slip grip

RSC 5-T E - Test disconnect terminal block



3059537

<https://www.phoenixcontact.com/in/products/3059537>

AP RSC-T - Cover profile

3059139

<https://www.phoenixcontact.com/in/products/3059139>



Cover profile, for covering terminal strips, directly snapped onto RBO... and RSC... test disconnect terminal blocks. Length supplied: 1 m

D-RSC 5-T E - End cover

3059621

<https://www.phoenixcontact.com/in/products/3059621>

End cover, length: 80.9 mm, width: 2.2 mm, height: 39.7 mm, color: dark gray



RSC 5-T E - Test disconnect terminal block



3059537

<https://www.phoenixcontact.com/in/products/3059537>

TS-UT 6-T/SP - Separating plate

3072821

<https://www.phoenixcontact.com/in/products/3072821>

Separating plate, length: 105.2 mm, width: 1 mm, height: 67.5 mm, color: gray



CARRIER 35-13 KIT - Short circuit kit for current transformers

3215067

<https://www.phoenixcontact.com/in/products/3215067>

Short-circuit kit for current transformer. Use with DIN rail mounted RBO/RSC 5 feed-through terminals



RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/in/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/in/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/in/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/in/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/in/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/in/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/in/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/in/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/in/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/in/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/in/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/in/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/in/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/in/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/in/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/in/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/in/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/in/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/in/products/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

ZB 13:UNBEDRUCKT - Zack marker strip

0829131

<https://www.phoenixcontact.com/in/products/0829131>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 13 mm, lettering field size: 13 x 10.5 mm, Number of individual labels: 5

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

ZB 13 CUS - Zack marker strip

0829132

<https://www.phoenixcontact.com/in/products/0829132>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 13 mm, lettering field size: 13 x 10.5 mm, Number of individual labels: 5

ZBF 13:UNBEDRUCKT - Zack Marker strip, flat

0829133

<https://www.phoenixcontact.com/in/products/0829133>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 13 mm, lettering field size: 13 x 5.2 mm, Number of individual labels: 5

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>



ZBF 13 CUS - Zack Marker strip, flat

0829134

<https://www.phoenixcontact.com/in/products/0829134>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 13 mm, lettering field size: 13 x 5.2 mm, Number of individual labels: 5

CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/in/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

RSC 5-T E - Test disconnect terminal block

3059537

<https://www.phoenixcontact.com/in/products/3059537>

CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/in/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/in/products/0800886>



End clamp, width: 9.5 mm, color: gray

RSC 5-T E - Test disconnect terminal block



3059537

<https://www.phoenixcontact.com/in/products/3059537>

E/UK - End clamp

1201442

<https://www.phoenixcontact.com/in/products/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



E/UK 1 - End clamp

1201413

<https://www.phoenixcontact.com/in/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in