

TB 4-HESI (5X20) EI - Fuse modular terminal block



3075773

<https://www.phoenixcontact.com/in/products/3075773>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: G / 5 x 20, nom. voltage: 500 V, nominal current: 6.3 A, connection method: Screw connection, cross section: 0.5 mm²- 6 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: dark gray

Commercial data

Item number	3075773
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE1
Product key	BEK234
GTIN	4046356528832
Weight per piece (including packing)	13.334 g
Weight per piece (excluding packing)	13.334 g
Country of origin	IN

TB 4-HESI (5X20) EI - Fuse modular terminal block



3075773

<https://www.phoenixcontact.com/in/products/3075773>

Technical data

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W
Fuse	G / 5 x 20

Connection data

Number of connections per level	2
Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	9 mm
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.5 mm ² ... 6 mm ²
Cross section AWG	20 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	20 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 1.5 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1.5 mm ²
Nominal current	6.3 A (the current is determined by the fuse used)
Maximum load current	6.3 A
Nominal voltage	500 V (the voltage is determined by the fuse used)

Dimensions

Width	8.2 mm
Height	58 mm
Depth on NS 32	55 mm
Depth on NS 35/7,5	50 mm
Depth on NS 35/15	57.5 mm

Material specifications

Color	dark gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	0.02g ² /Hz
Acceleration	0.8g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)

TB 4-HESI (5X20) EI - Fuse modular terminal block



3075773

<https://www.phoenixcontact.com/in/products/3075773>

Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

TB 4-HESI (5X20) EI - Fuse modular terminal block




3075773

<https://www.phoenixcontact.com/in/products/3075773>

Drawings

Circuit diagram

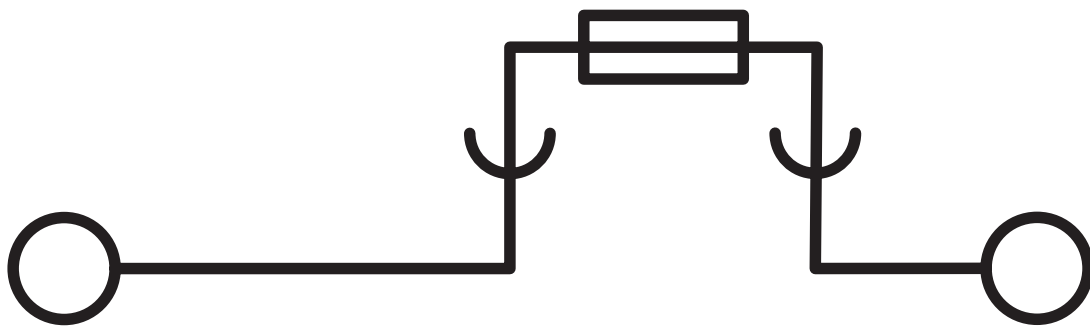

TB 4-HESI (5X20) EI - Fuse modular terminal block




3075773

<https://www.phoenixcontact.com/in/products/3075773>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/3075773>

 cULus Recognized Approval ID: E60425		Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B		600 V	6.3 A	20 - 10	-
Use group C		600 V	6.3 A	20 - 10	-

TB 4-HESI (5X20) EI - Fuse modular terminal block



3075773

<https://www.phoenixcontact.com/in/products/3075773>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 8.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121410
-------------	----------

TB 4-HESI (5X20) EI - Fuse modular terminal block



3075773

<https://www.phoenixcontact.com/in/products/3075773>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

TB 4-HESI (5X20) EI - Fuse modular terminal block



3075773

<https://www.phoenixcontact.com/in/products/3075773>

Accessories

INBS 10-8 - Insertion bridge

3247159

<https://www.phoenixcontact.com/in/products/3247159>



Insertion bridge, Bridging in the terminal point, number of positions: 10, color: dark gray

SZS 0,6X3,5 VDE - Screwdriver

1212602

<https://www.phoenixcontact.com/in/products/1212602>



Screwdriver, slot-headed, VDE insulated, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

TB 4-HESI (5X20) EI - Fuse modular terminal block



3075773

<https://www.phoenixcontact.com/in/products/3075773>

E/TB - End bracket

3246966

<https://www.phoenixcontact.com/in/products/3246966>

End clamp, for assembly on NS 32 or NS 35/7.5 DIN rail



NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/in/products/1201002>

DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver



TB 4-HESI (5X20) EI - Fuse modular terminal block

3075773

<https://www.phoenixcontact.com/in/products/3075773>



NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/in/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in