



Data Sheet | Item Number: 289-175

Interface module; RJ-45; PCB terminal blocks, double-row; Cat. 5; in mounting carrier; with shield connection; with shield clamping saddle; 1,50 mm²

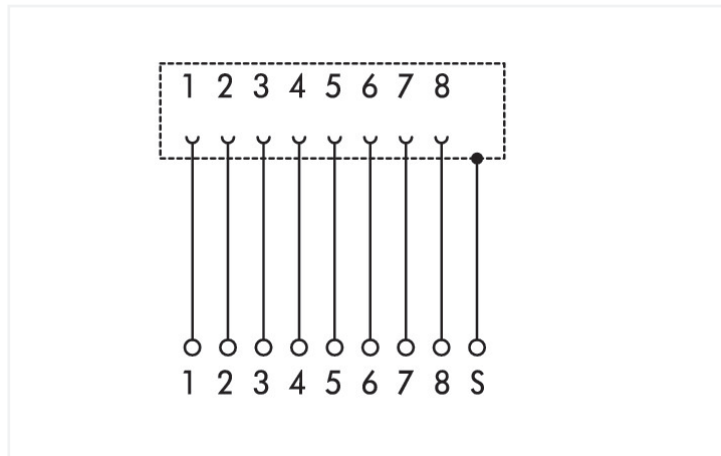

<https://www.wago.com/289-175>

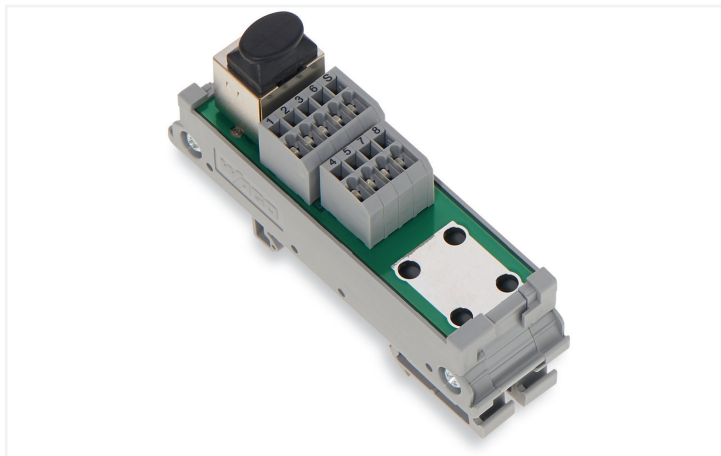

Electrical data

Nominal current	1.5 A
Insulation resistance	≥ 500 MΩ
Specialty functions	With shield connection

Safety and protection

Dielectric strength (contact/contact) (AC, 1 min)	1 kVrms
---	---------

Connection data

Mating cycles	500
Transmission length (max.)	100 m
Connection cable	Cat. 5 (min.)

Connection 1

Connector	RJ-45 (shielded)
Pole number 1	8
Connection type 1	System

Connection 2

Design 2	PCB terminal blocks (double-row)
Pole number 2	9
Connection type 2	System
Connection technology 2	CAGE CLAMP®
WAGO connector 2	WAGO 739 Series
Solid conductor 2	0.08 ... 1.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor 2	0.08 ... 1.5 mm ² / 28 ... 14 AWG
Strip length 2	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	24 mm / 0.945 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	40 mm / 1.575 inches

Mechanical data

Mounting type	DIN-35 rail
Housing design	Mounting carrier
Mating cycles	500

Material data

Fire load	0.795 MJ
Weight	35 g

Environmental requirements

Ambient temperature (operation)	-40 ... +85 °C (Actuation: -35 ... +85 °C)
Ambient temperature (storage)	-40 ... +85 °C
Ambient temperature UL (operation at U _N)	-40 ... +70 °C
Relative humidity	≤ 85% (non-condensing)

Standards and specifications

Standards/specifications	DNV
--------------------------	-----

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	19-17-90-01
eCl@ss 9.0	19-17-90-01
ETIM 8.0	EC001121
ETIM 7.0	EC001121
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454317522
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 508	E175199 Vol.2 Sec.1

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV Germany GmbH	DNV-CG-0339, Aug.2021	TAA00001D1
PRS Polski Rejestr Statków	-	TE/2186/880590/18

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-175



Documentation

Bid Text

289-175	09.02.2015	doc 25.50 KB	
289-175	19.02.2019	xml 3.43 KB	

Instruction Leaflet

pdf
1246.19 KB



CAD/CAE-Data

CAD data

2D/3D Models 289-175



CAE data

EPLAN Data Portal
289-175



WSCAD Universe
289-175



ZUKEN Portal 289-175



1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 709-196

Marking strips; for laser printer; translucent



Item No.: 709-177

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.2 Shield termination

1.1.2.1 Shield clamping saddles



Item No.: 790-108

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm

Item No.: 790-208

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

1.1.3 Tool

1.1.3.1 Operating tool



Item No.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft