


Data Sheet | Item Number: 289-725

Interface module; with solder pin; Female connector; 9-pole; Double-deck PCB terminal blocks; in mounting carrier; Mating connector for solder connection; 2,50 mm²



<https://www.wago.com/289-725>

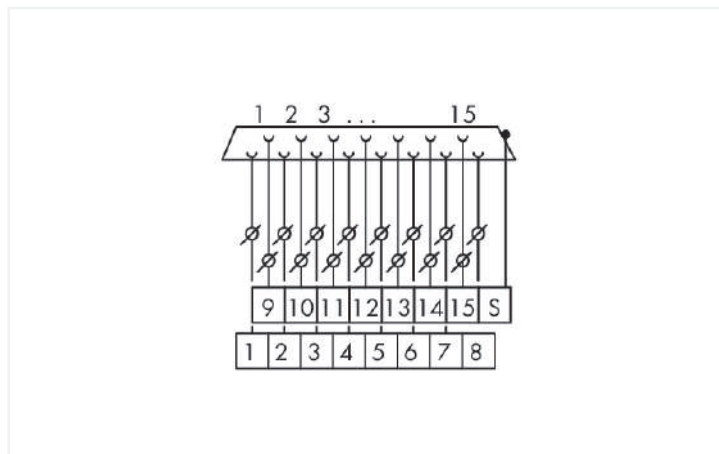

Notes

Note One solder terminal per pole is available for testing and patching (except for shield contact).

Electrical data

Operating voltage	≤30 VAC; ≤50 VDC
Nominal current	2 A
Contact resistance (max.)	30 mΩ
Specialty functions	With solder pin With shield connection

Safety and protection

Rated voltage	50 V
Pollution degree	2
Protection type	IP00; Notice! Live parts can be easily touched! Protection against direct contact must be provided by the equipment manufacturer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be observed for each individual application.
Dielectric strength (channel/channel) (AC, 1 min.)	1.3 kVrms
Insulation type	Functional insulation

Connection data

Performance level	2 / 200 mating cycles	Connection 1	
Strain relief	UNC 4-40 stud bolt	Connector	D-subminiature female connector
		Pole number 1	9
		Connection type 1	System
		Note (conductor cross-section)	12 AWG: THHN, THWN
		Mating direction	vertical

Connection 2

Design 2	PCB terminal blocks (double-deck)
Pole number 2	10
Connection type 2	Field
Connection technology 2	CAGE CLAMP®
WAGO connector 2	WAGO 736 Series
Solid conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length 2	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	33.5 mm / 1.319 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	48 mm / 1.89 inches

Mechanical data

Mounting type	DIN-35 rail
Housing design	Mounting carrier

Material data

Contact material (connector)	Au over Ni
Fire load	0.856 MJ
Weight	50.9 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
Ambient temperature (storage)	-40 ... +70 °C
Relative humidity	≤ 85% (non-condensing)

Standards and specifications

Standards/specifications	EN 61010-2-201
--------------------------	----------------

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-14-11-52
eCl@ss 9.0	27-14-11-52
ETIM 8.0	EC002780
ETIM 7.0	EC002780
PU (SPU)	8 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454371227
Customs tariff number	85366990990

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	a1c979d0-7c2c-4a0a-9a12-e7de467e4d80
SCIP notification number (Belgium)	73a3e206-15bc-4ec0-ab0e-676e8c2c9f32
SCIP notification number (Bulgaria)	16be40d4-c9cf-4b86-a737-4b7774a8026c
SCIP notification number (Czech Republic)	893ceba5-bede-4281-b096-858f1302c88e
SCIP notification number (Denmark)	95219cac-224e-4002-bc18-e86800609176
SCIP notification number (Finland)	bac88b6b-f458-405f-9ee2-e8415f7d00ae
SCIP notification number (France)	23c555c5-d4b4-461a-9e14-7d5268768377
SCIP notification number (Germany)	a799dc4c-a9dd-4f40-a998-48918b8b4411
SCIP notification number (Hungary)	f18314c4-adc0-464b-9475-67cc096446eb
SCIP notification number (Italy)	1c34d755-b188-452c-9a33-2eae8a52ac64
SCIP notification number (Netherlands)	fc83c792-aad5-42cc-bf5b-abc18fe536cf
SCIP notification number (Poland)	e77e6278-1e75-47e2-becc-1f5e5cf2d60c
SCIP notification number (Romania)	5739de6d-e3a8-4afa-a24d-09260754f306
SCIP notification number (Sweden)	6385a8bd-0ba7-48b3-83cc-d6684e57e41e

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-725	↓
--	-------------------

Documentation

Bid Text

289-725	19.02.2019	xml 3.70 KB	↓
289-725	09.02.2015	doc 27.00 KB	↓

Instruction Leaflet

	pdf 1246.19 KB	↓
--	-------------------	-------------------

CAD/CAE-Data

CAD data

2D/3D Models 289-725	↓
----------------------	-------------------

CAE data

EPLAN Data Portal 289-725	↓
WSCAD Universe 289-725	↓
ZUKEN Portal 289-725	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Cover



Item No.: 709-153

Cover; Type 1; suitable for cover carrier, type 1; 1 m long; transparent

1.1.1.2 Cover carrier



Item No.: 709-167

Cover carrier; Type 1; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.1.2 Marking

1.1.2.1 Marking strip



Item No.: 709-196

Marking strips; for laser printer; translucent



Item No.: 709-177

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.3 Tool

1.1.3.1 Operating tool



Item No.: 210-720


Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



Conductor termination – screwdriver actuation parallel to conductor entry



Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.