


Data Sheet | Item Number: 706-100/310-100

System cable; 10-pole; Pluggable connector per DIN 41651; open-ended; Length: 1 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-100/310-100>

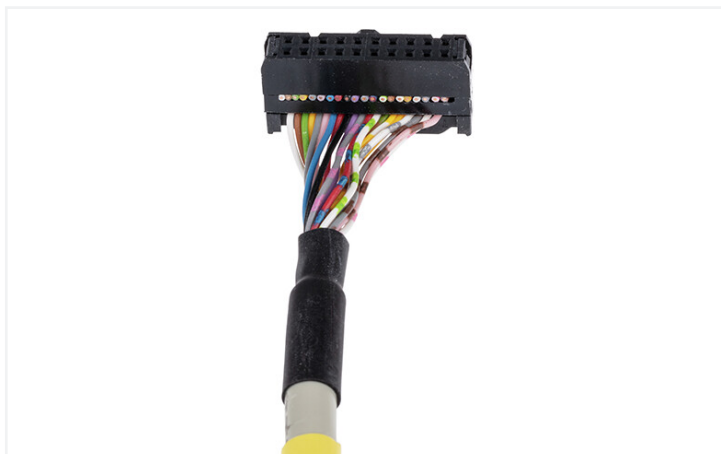

Similar to illustration

Color coding acc. to DIN VDE 47100		10 poles flat connector
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10

Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.
------	---

Electrical data

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Connector	Pluggable connector per DIN 41651; female connector
Pole number 1	10
Connection type 1	System
Wire cross-section	0.14 mm ²

Connection 2

Connector 2	open-ended
Connection type 2	open-ended

Physical data

Cable length	1 m
--------------	-----

Material data

Fire load	0 MJ
Weight	60 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Country of origin	FR
GTIN	4050821777649
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
706-100/310-100

