


Data Sheet | Item Number: 706-100/320-300

Connection cable; 20-pole; Pluggable connector per DIN 41651; open-ended;
Length: 3 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-100/320-300>

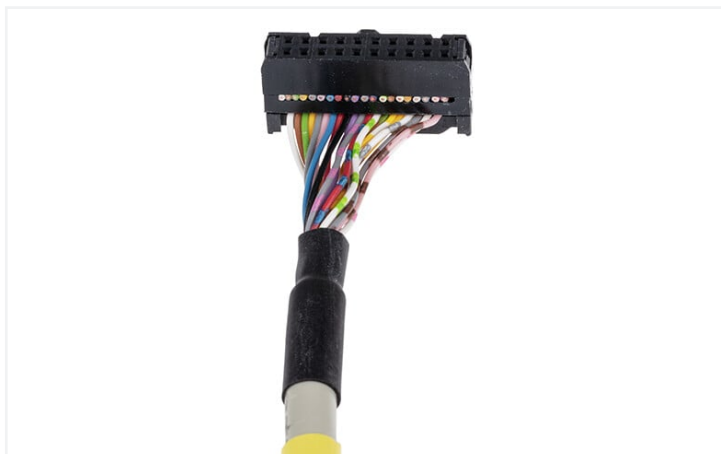

Color coding acc. to DIN VDE 47100	20 poles flat connector	
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
Yellow-Brown		16
White-Grey		17
Grey-Brown		18
White-Pink		19
Pink-Brown		20

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data

Operating voltage \leq AC/DC 35 V
Current per wire (max.) 1 A

Connection data

Cable type LiYY
Color code per DIN VDE 47100

Connection 1

Connector Pluggable connector per DIN 41651; female connector
Pole number 1 20
Connection type 1 System
Wire cross-section 0.14 mm²

Connection 2

Connector 2 open-ended
Connection type 2 open-ended

Physical data

Cable length 3 m

Material data

Fire load	0 MJ
Weight	223 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821835240
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
706-100/320-300

