


Data Sheet | Item Number: 706-100/334-200

Connection cable; 34-pole; Pluggable connector per DIN 41651; open-ended;
Length: 2 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-100/334-200>

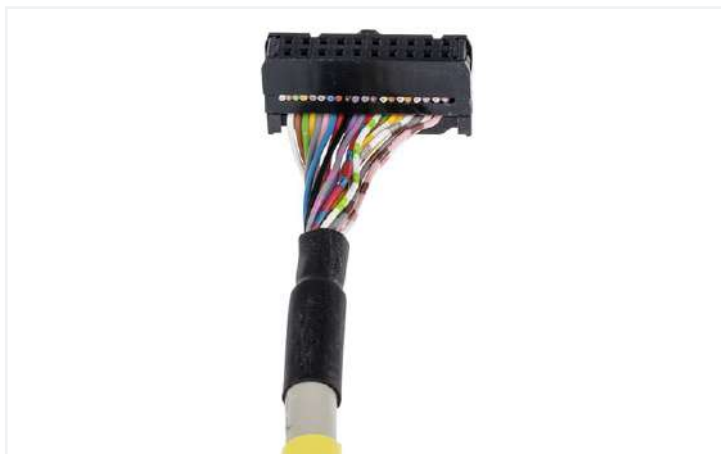

Color coding per VDE 0293 47102	34 poles flat connector
White	1
Brown	2
Green	3
Yellow	4
Grey	5
Pink	6
Blue	7
Red	8
Black	9
White	10
Grey-Black	11
Red-Blue	12
White-Green	13
Brown-Black	14
White-Black	15
Yellow-Black	16
White-Grey	17
Grey-Black	18
White-Black	19
Pink-Black	20
White-Black	21
Brown-Black	22
White-Black	23
Brown-Black	24
White-Black	25
Brown-Black	26
Grey-Black	27
Yellow-Black	28
Pink-Black	29
White-Black	30
Grey-Black	31
White-Black	32
Yellow-Black	33
White-Black	34

Similar to illustration

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Connector	Pluggable connector per DIN 41651; female connector
Pole number 1	34
Connection type 1	System
Wire cross-section	0.14 mm ²

Connection 2

Connector 2	open-ended
Connection type 2	open-ended

Physical data

Cable length	2 m
--------------	-----

Material data

Fire load	0 MJ
Weight	408 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143977005
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
706-100/334-200

