


# Data Sheet | Item Number: 706-100/609-300

Connection cable; 9-pole; with solder pin; Female connector; open-ended; Length: 3 m; Conductor cross-section: 0.25 mm<sup>2</sup>

<https://www.wago.com/706-100/609-300>

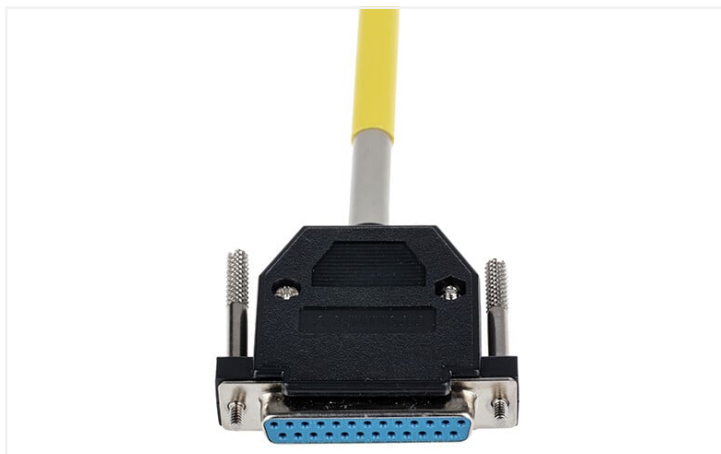

Similar to illustration

Color coding acc. to DIN VDE 47100		9 poles female Sub-D connector	
		Pin number	
White		1	
Brown		2	
Green		3	
Yellow		4	
Grey		5	
Pink		6	
Blue		7	
Red		8	
Black		9	
Shield		Connected to Sub-D	

## Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

## Electrical data

Operating voltage ≤ AC/DC 35 V  
Current per wire (max.) 2 A

## Connection data

Cable type LiYCY  
Color code per DIN VDE 47100

### Connection 1

Connector D-subminiature female connector  
Pole number 1 9  
Connection type 1 System  
Wire cross-section 0.25 mm<sup>2</sup>

### Connection 2

Connector 2 open-ended  
Connection type 2 open-ended

## Physical data

Cable length 3 m

**Material data**

Fire load	0 MJ
Weight	1.1 g

**Environmental requirements**

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

**Commercial data**

ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143491099
Customs tariff number	85444290900

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Downloads**

**Environmental Product Compliance**

**Compliance Search**

Environmental Product Compliance 706-100/609-300	
---	--