


Data Sheet | Item Number: 706-100/615-200

Connection cable; 15-pole; with solder pin; Female connector; open-ended; Length: 2 m; Conductor cross-section: 0.25 mm²

<https://www.wago.com/706-100/615-200>

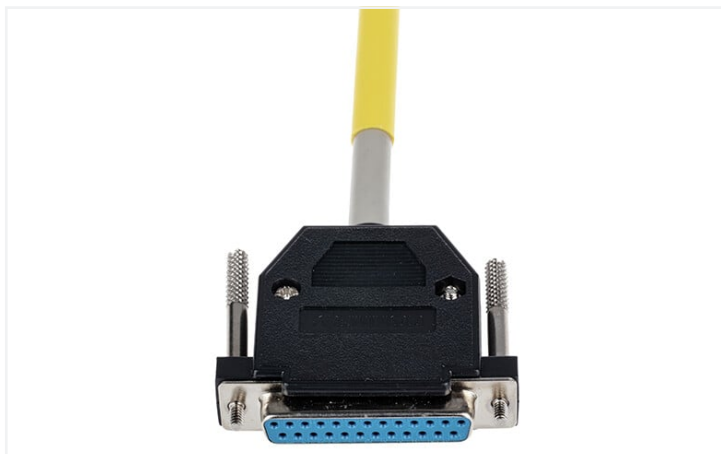

Similar to illustration

Color coding acc. to DIN VDE 47100		15 poles female Sub-D connector	
		Pin number	
White			1
Brown			2
Green			3
Yellow			4
Grey			5
Pink			6
Blue			7
Red			8
Black			9
Violet			10
Grey-Pink			11
Red-Blue			12
White-Green			13
Brown-Green			14
White-Yellow			15
Shield			Connected to Sub-D

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

Operating voltage ≤ AC/DC 35 V
Current per wire (max.) 2 A

Connection data

Cable type LiYCY
Color code per DIN VDE 47100

Connection 1

Connector D-subminiature female connector
Pole number 1 15
Connection type 1 System
Wire cross-section 0.25 mm²

Connection 2

Connector 2 open-ended
Connection type 2 open-ended

Physical data

Cable length 2 m

Material data

Fire load	0 MJ
Weight	1.1 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
GTIN	4050821835622
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-100/615-200	
---	--