


Data Sheet | Item Number: 756-1300/000-1000

System bus cable; 5-pole; Length: 100 m

<https://www.wago.com/756-1300/000-1000>

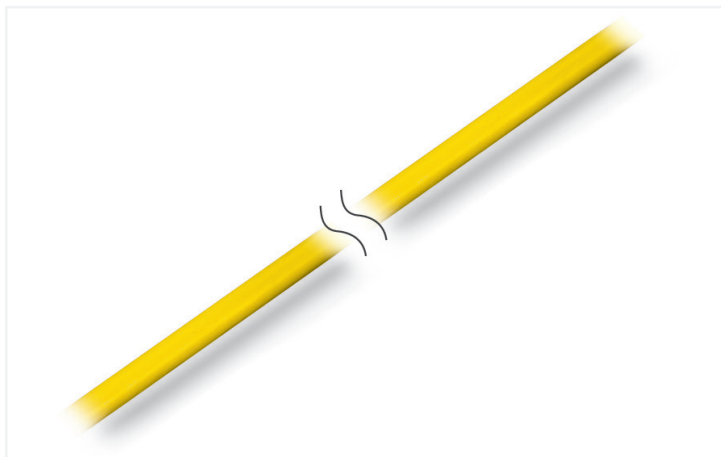

Color: ■ yellow

Short description:

- PUR, halogen-free
- Silicon- and CFC-free
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Technical data

Connection type	free end - free end
Pole number	5
Cable length	100 m
PLC manufacturer	WAGO
Operating voltage	125 V
Operating current	4 A
Rated surge voltage	1.5 kV per IEC 61076-2-101
Contact resistance	10 mΩ
Insulation resistance	5000 MΩ
Conductor resistance	≤ 145 Ω/km

Mechanical data

Bending radius	5 x cable diameter (min.)
Sheathed cable diameter	6 mm
Type code	KS-02YS(ST+C)11Y 4x2xAWG26/7-100 Ω, shielded
Shield	Aluminum-laminated foil and tinned copper braid, optical coverage approx. 65 %
Conductor configuration	Bare copper wire (26/7 AWG)
Conductor insulation	Zell-PE; Core Ø: 1.0 mm (max.)
Wire colors	white-blue, blue, white-orange, orange, white-green, green, white-brown, brown
Material properties of the connections	Hexagon knurled nut: CuZn; Knurled nut surface: nickel-plated; Sealing ring: FPM (Viton)
Weight	10 g
Color	yellow

Environmental requirements

Ambient temperature (operation)	-25 ... +60 °C
Protection type	IP67
Pollution degree	3/2 per IEC 60664-1
Fire load	0 MJ

Commercial data

eCl@ss 10.0	27-06-18-01
eCl@ss 9.0	27-06-18-01
ETIM 8.0	EC003249
ETIM 7.0	EC003249
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454779450
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
756-1300/000-1000



Documentation

System Description

I/O-SYSTEM – SPEED-
WAY, General Product
Information

pdf
1035.20 KB



CAD/CAE-Data

CAE data

WSCAD Universe
756-1300/000-1000

