
Data Sheet | Item Number: 756-3503/050-020


Power cable; M12L plug; straight; 5-pole; Length: 2 m


https://www.wago.com/756-3503/050-020





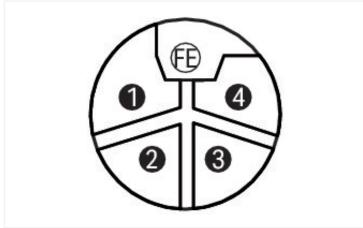

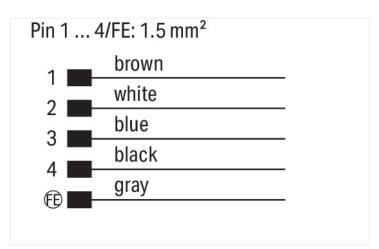

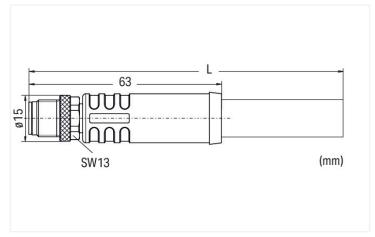

Short description:

These power cables are an accessory for the WAGO I/O System Field.

Use them as flexible, flame-retardant and halogen-free supply cables for industrial mechanical engineering applications – particularly those with high requirements, e.g., for use in cable chains (drag chains) and moving machine parts.

- Strong resistance to microbes and hydrolysis
- Good to very good weather resistance (UV and ozone)
- High resistance against welding sparks
- Excellent chemical and oil resistance
- · Silicon- and PVC-free
- Free from paint-wetting impairment substances
- Flexible at low temperatures

echnical data			
General information		General information	
Operating voltage	63 VDC per IEC 60664-1	Ambient (operating) temperature (dyna-	-30 +90 °C
Operating current	16 A	mic)	
Rated surge voltage	1.5 kV per IEC 61076-2-111		
nsulation resistance	≥10 ⁸ Ω		
Contact resistance	5 mΩ		
onductor resistance	≤ 13.7 Ω/km		
llution degree	3 per IEC 60664-1		
otection type	IP68		
mbient temperature (operation)	-40 +90 °C (UL max. +80 °C)		
mbient (operating) temperature (static)	-40 +90 °C		

Data Sheet | Item Number: 756-3503/050-020 https://www.wago.com/756-3503/050-020



Drag chain compatible	
Bending radius	Fixed: >4xØ; Flexible: >7.5xØ
Bending cycles	10 million

Cable	
Cable length	2 m
Type code	LiF9YH-11Y-0B 5x1.5mm²
Conductor configuration	Bare copper wire (84 x 0.15 mm)
Conductor insulation	PP9Y (halogen-free)
Sheathed cable color	gray
Sheathed cable diameter	9.6 10.2 mm

Connector	
Connection type	M12 plug - free end
Pole number	5
Cable connection direction to mating direction	0°
Connector interface coding (cable/adapter) 1 1	L-coded
Housing material	TPU/TPU, black (~ RAL 9005)
Tightening torque	1 Nm

Commercial data	
ETIM 8.0	EC001855
ETIM 7.0	EC003249
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	DE
GTIN	4055143982122
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 2237	E519600

Data Sheet | Item Number: 756-3503/050-020

https://www.wago.com/756-3503/050-020



Downloads Environmental Product Compliance Compliance Search Environmental Product Compliance 756-3503/050-020

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$