


## Data Sheet | Item Number: 787-1732

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 10 A output current; DC-OK LED

<https://www.wago.com/787-1732>

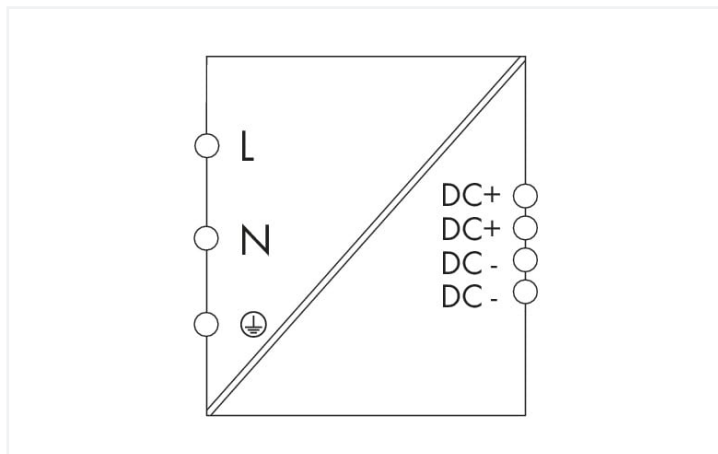

### Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1 and UL 60950-1; PELV per EN 60204
- DIN-35 rail mountable in different positions
- Direct installation on mounting plate via cable grip

### Technical data

Input		Output	
Phases	1	Nominal output voltage $U_{o, nom}$	DC 24 V (SELV)
Nominal input voltage $U_{i, nom}$	1 x AC 100 ... 240 V	Output voltage range	DC 22 ... 26 V (adjustable)
Input voltage range	1 x AC 90 ... 264 V; DC 125 ... 375 V	Default setting	DC 24 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz	Nominal output current $I_{o, nom}$	10 A (24 VDC; 110 ... 240 VAC); 8 A (24 VDC; 100 ... 240 VAC)
Input current $I_i$	$\leq 2$ A (230 VAC); $\leq 4$ A (115 VAC)	Nominal output power	240 W
Discharge current	$\leq 0.05$ mA	Deviation	$\leq 1$ %
Inrush current	$\leq 18$ A	Residual ripple	$\leq 200$ mV (peak-to-peak)
Power factor correction (PFC)	active	Overload behavior	Constant power (in overload range: 1.05 ... 1.4 x $I_{o, nom}$ ); Shutdown and automatic restart in the event of a short circuit
Mains failure hold-up time	$\geq 10$ ms (230 VAC)		

### Signaling and communication

Signaling	1 x LED DC OK (green)
Operation status indicator	Green LED ( $U_o$ )

### Efficiency/power losses

Power loss $P_l$	$\leq 38$ W (230 VAC; 24 VDC; 10 A)
Efficiency (typ.)	91 % (230 VAC; 10 ADC)

### Circuit protection

Internal fuse	F 3.15 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: B6, B10

### Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ DC 30 V
Oversvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes, for 2 devices of the same type
MTBF	> 300,000 h (per IEC 61709)

### Connection data

Connection type 1	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

### Physical data

Width	70 mm / 2.756 inches
Height	165 mm / 6.496 inches
Depth from upper-edge of DIN-rail	99 mm / 3.898 inches

### Mechanical data

Mounting type	DIN-35 rail Screw mount
---------------	----------------------------

### Material data

Fire load	0.129 MJ
Weight	840 g

### Environmental requirements

Ambient temperature (operation)	-20 ... +60 °C
Ambient temperature (storage)	-25 ... +75 °C
Relative humidity	10 ... 95 % (no condensation permissible)
Derating	-4 %/K (> 45 °C)

## Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 62368-1 UL 60950-1 UL 508 SEMI F47

## Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143375221
Customs tariff number	85044083900

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	0a97bf33-131c-407b-acfb-5acb8cc93417
SCIP notification number (Czech Republic)	11509a2d-34b9-4c66-ac52-057fde5e372d

## Approvals / Certificates

### General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02. B.00089_19
UL Underwriters Laboratories Inc.	UL 508	E255817
UL Underwriters Laboratories Inc.	UL 60950-1	E255815

### Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

## Downloads

### Environmental Product Compliance

Compliance Search

Environmental Product  
Compliance 787-1732



Documentation

Bid Text

787-1732      01.10.2019      xml  
6.80 KB     

787-1732      01.10.2019      docx  
20.56 KB     

ausschreiben.de  
787-1732     

Instruction Leaflet

ECO Power Switched-      V 1.4      pdf  
Mode Power Supplies      21.12.2020      264.53 KB     

CAD/CAE-Data

CAD data

2D/3D Models  
787-1732     

CAE data

EPLAN Data Portal  
787-1732     

WSCAD Universe  
787-1732     

ZUKEN Portal  
787-1732     

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



**Item No.: 210-831**

Marking strips; on reel; 2.3 mm wide; plain;  
Self-adhesive; white

**Item No.: 210-832**

Marking strips; on reel; 3 mm wide; plain;  
Self-adhesive; white

1.1.2 Tool

1.1.2.1 Operating tool



**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a  
partially insulated shaft; multicoloured

**Item No.: 210-769**

SCREWDRIVER; green

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](http://www.wago.com)