



Data Sheet | Item Number: 787-2852

Switched-mode power supply; 1-phase; 24 VDC output voltage; 1 A output current

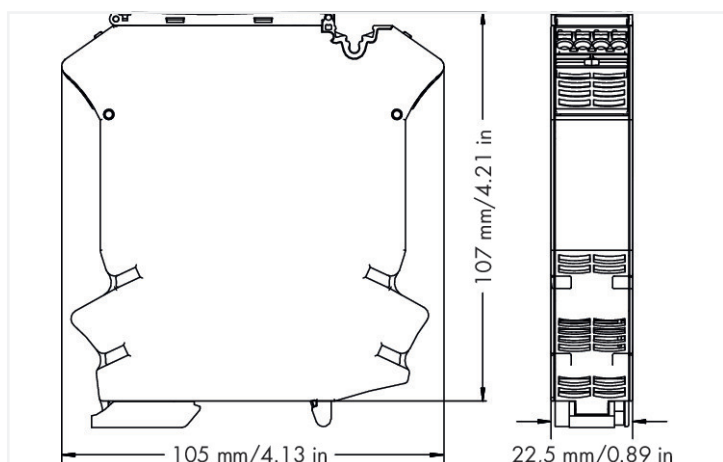

<https://www.wago.com/787-2852>

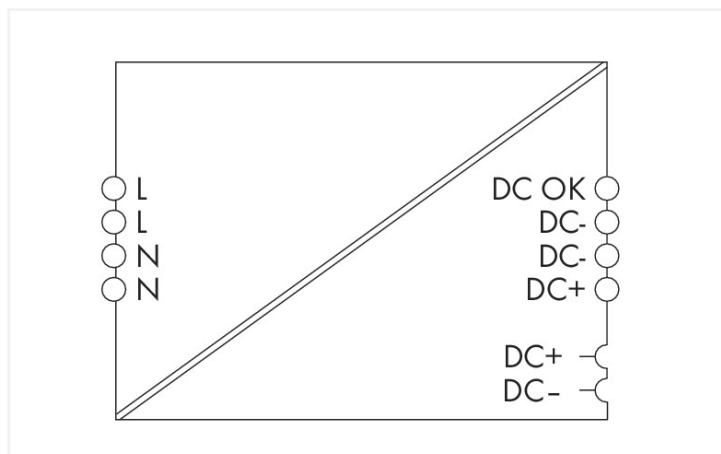

Dimensions in mm

Features:

- Switched-mode power supply in 22.5 mm wide 2857 Series housing; device shares a common profile with the 2857 and 857 Series Signal Conditioners.
- Both 24 VDC and 0 V output voltage can be easily supplied to adjacent modules via 859-4xx Jumpers.
- Pluggable *picoMAX*® Connection Technology
- Natural convection cooling
- DC OK message as active signal output (24 VDC, 20 mA)
- Integrated redundancy diode enables easy fail-safe power supply via parallel connection of two power supplies.
- Approvals for worldwide applications

Technical data

Input	
Phases	1
Nominal input voltage $U_{i\text{nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 85 ... 264 V; DC 120 ... 372 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	≤ 0.28 A (240 VAC; nominal load); ≤ 0.49 A (100 VAC; nominal load)
Discharge current	≤ 1 mA
Inrush current	≤ 30 A
Power factor	≥ 0.6 (230 VAC; Nominal load; per EN 61000-3-2)
Power factor correction (PFC)	none

Input	
Mains failure hold-up time	≥ 20 ms (100 VAC)

Output

Nominal output voltage $U_{o, nom}$	DC 24 V (SELV)
Default setting	DC 24 V
Nominal output current $I_{o, nom}$	1 A
Nominal output power	24 W
Deviation	$\leq 2 \%$
Deviation, dynamic load change 10 ... 90 %	$\leq 1 \%$
Residual ripple	≤ 100 mV (peak-to-peak)
Current limitation	$1.1 \times I_{o, nom}$ (typ.)
Overload behavior	Constant current

Efficiency/power losses

Power loss P_1	≤ 1 W; ≤ 4.3 W (230 VAC; nominal load)
Power loss (max.) $P_{1(max)}$	5 W (100 VAC / 24 VDC; 1 A)
Efficiency (typ.)	86 % (230 VAC; nominal load); 84 % (110 VAC; nominal load)

Signaling and communication

Signaling	1 x LED DC OK (green) 1 x Overload LED (red) 1 x Active signal output DC OK (24 VDC; 20 mA)
Operation status indicator	Green LED ($U_o > 21.5$ V) Red LED (overload)

Circuit protection

Internal fuse	T 2 A / 250 VAC
Backup fusing (recommended)	Circuit breaker: 6 A, 10 A, 16 A; Tripping characteristic: B or C

Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Protection class	II
Protection type	IP20; per EN 60529
Resistance to reverse feed	\leq DC 60 V
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	Internal protective circuit $\leq 29 \dots 31$ VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes, for 2 devices of the same type
Series operation	Yes, for 2 devices of the same type
MTBF	$> 500,000$ h (at 25 °C per IEC 61709)

Connection data

Number of jumper slots	4
Connection type 1	Input/output/signaling
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 5.0
Solid conductor	0.2 ... 2.5 mm ² / 24 ... 10 AWG
Fine-stranded conductor	0.2 ... 2.5 mm ² / 24 ... 10 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	22.5 mm / 0.886 inches
Height from upper-edge of DIN-rail	107 mm / 4.213 inches
Depth	105 mm / 4.122 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	1.417 MJ
Weight	200 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Nominal mounting position; -25 ... +55 °C (in any mounting position))
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-2 %/K (> 60 °C)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61000-6-2 EN 61000-6-3 EN 60950-1 DNV
Standards/specifications (pending)	UL 60950 cULus 508 ANSI/ISA 12.12.01 (Class I Div. 2) ATEX/IEC Ex

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143295529
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02. B.00089_19

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV Germany GmbH	DNV-CG-0339, Aug. 2021	TAA0000154

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 787-2852

Documentation

Bid Text			
787-2852	06.01.2016	xml 6.55 KB	
787-2852	06.01.2016	doc 37.00 KB	

Instruction Leaflet		
Primär getaktete Stromversorgungen	pdf 329.08 KB	

CAD/CAE-Data

CAD data
2D/3D Models 787-2852

CAE data	
EPLAN Data Portal 787-2852	
WSCAD Universe 787-2852	
ZUKEN Portal 787-2852	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Jumper

1.1.1.1 Jumper

Item No.: 281-482 Jumper; 2-way; insulated; gray	Item No.: 859-402/000-006 Jumper; for jumper slot; 2-way; insulated; blue	Item No.: 859-402 Jumper; for jumper slot; 2-way; insulated; light gray	Item No.: 859-402/000-005 Jumper; for jumper slot; 2-way; insulated; red
Item No.: 859-402/000-029 Jumper; for jumper slot; 2-way; insulated; yellow			

1.1.2 Marking

1.1.2.1 Marker



Item No.: 2009-141

Micro-USB-Inline; 2000 pieces on roll; plain; snap-on type; white



Item No.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 793-502

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-566

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-503

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-504

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-505

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-506

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.2.2 Marking strip



Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.3 Terminal blocks

1.1.3.1 Supply module



Item No.: 857-979

Supply and through module

1.1.3.2 Through terminal block



Item No.: 857-979

Supply and through module

1.1.4 Tool

1.1.4.1 Operating tool



Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured