


## Data Sheet | Item Number: 788-120

Accessories for relay modules; Operation status indicator: red; Nominal operating voltage: 24 VDC

<https://www.wago.com/788-120>

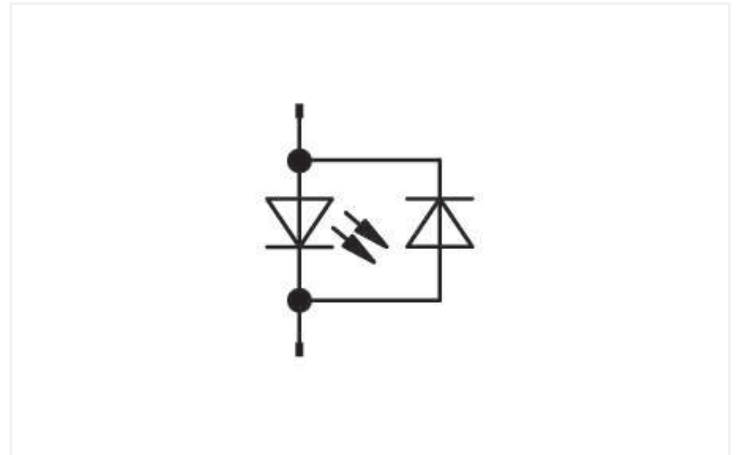

Similar to illustration

### Notes

Note Only required when using relays without integrated status indicator!

### Technical data

#### Operating data

Nominal operating voltage	DC 24 V
Operating voltage	12 ... 24 VDC
Current consumption at $U_N$	2.4 mA

#### Signaling

Status indicator	Red LED
------------------	---------

### Mechanical data

Mounting type	Pluggable module
---------------	------------------

### Material data

Fire load	0.037 MJ
Weight	1.5 g

### Environmental requirements

Ambient temperature (operation at $U_N$ )	-40 ... +70 °C
Ambient temperature UL (operation at $U_N$ )	-40 ... +50 °C
Ambient temperature (storage)	-40 ... +70 °C

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-37-16-92
eCl@ss 9.0	27-37-16-92
ETIM 8.0	EC002586
ETIM 7.0	EC002586
PU (SPU)	50 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454351960
Customs tariff number	85318070000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

### Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 788-120	<a href="#">↓</a>

### Documentation

Bid Text			
788-120	19.02.2019	xml 2.57 KB	<a href="#">↓</a>
788-120	20.02.2019	docx 15.04 KB	<a href="#">↓</a>

### CAD/CAE-Data

CAD data	
2D/3D Models 788-120	<a href="#">↓</a>

CAE data	
EPLAN Data Portal 788-120	<a href="#">↓</a>
WSCAD Universe 788-120	<a href="#">↓</a>
ZUKEN Portal 788-120	<a href="#">↓</a>

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](http://www.wago.com)