

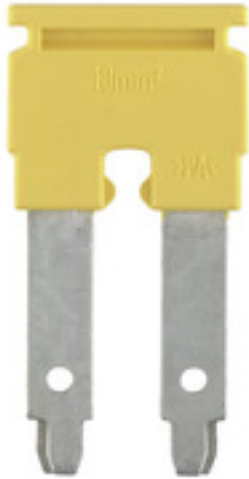
**ZQV 10/2****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

**General ordering data**

Version	Accessories, Cross-connector, 57 A
Order No.	<a href="#">1739680000</a>
Type	ZQV 10/2
GTIN (EAN)	4008190957131
Qty.	25 pc(s).

## ZQV 10/2

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	35.1 mm	Depth (inches)	1.382 inch
Height	17.8 mm	Height (inches)	0.701 inch
Width	4 mm	Width (inches)	0.157 inch
Net weight	5.9 g		

## Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

## Material data

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

## System specifications

Version	For the terminals
---------	-------------------

## Additional technical data

Explosion-tested version	Yes	Installation advice	Direct mounting
Type of fixing	Plugged		

## Cross-connector

Number of cross-connected terminals	2	Rated current, 2-pole	57 A
Type	Cross-connector		

## Dimensions

Pitch in mm (P)	10 mm
-----------------	-------

## General

Installation advice	Direct mounting	Number of poles	2
---------------------	-----------------	-----------------	---

## Rating data

Rated current	57 A
---------------	------

## Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ETIM 9.0	EC000489
ECLASS 9.0	27-14-11-40	ECLASS 9.1	27-14-11-40
ECLASS 10.0	27-14-11-40	ECLASS 11.0	27-14-11-40
ECLASS 12.0	27-14-11-40	ECLASS 13.0	27-25-03-03

## Environmental Product Compliance

REACH SVHC	/
RoHS Compliance Status	Compliant without exemption

## ZQV 10/2

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Important note

Product information Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used

### Approvals

ROHS Conform

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">Confirmation of Standards EN 45545-2_2020-10</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">Zuken E3.S</a>
User Documentation	<a href="#">Operating instructions_ZDU1.5-ZDU35_ZQV.pdf</a> <a href="#">StorageConditionsTerminalBlocks</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	