



direct-on-line starter, 3RM1, 500 V, 0.55 - 3 kW, 1.6 - 7 A, 110-230 V AC, screw/spring-loaded terminals (push-in)

| | |
|---|--|
| product brand name | SIRIUS |
| product category | Motor starter |
| product designation | Direct-on-line starter |
| design of the product | with electronic overload protection |
| product type designation | 3RM1 |
| General technical data | |
| equipment variant according to IEC 60947-4-2 | 3 |
| product function | Direct-on-line starter |
| <ul style="list-style-type: none"> intrinsic device protection | Yes |
| <ul style="list-style-type: none"> for power supply reverse polarity protection | No |
| suitability for operation device connector 3ZY12 | No |
| power loss [W] for rated value of the current | |
| <ul style="list-style-type: none"> at AC in hot operating state per pole | 1.13 W |
| <ul style="list-style-type: none"> without load current share typical | 5.06 W |
| insulation voltage rated value | 500 V |
| overvoltage category | III |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for protective separation | |
| <ul style="list-style-type: none"> between main and auxiliary circuit | 500 V |
| <ul style="list-style-type: none"> between control and auxiliary circuit | 250 V |
| shock resistance | 6g / 11 ms |
| operating frequency maximum | 1 1/s |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 03/01/2017 |
| SVHC substance name | Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 |
| product function | |
| <ul style="list-style-type: none"> direct start | Yes |
| <ul style="list-style-type: none"> reverse starting | No |
| product function short circuit protection | No |
| Electromagnetic compatibility | |
| EMC emitted interference according to IEC 60947-1 | class A |
| EMC immunity according to IEC 60947-1 | Class A |
| conducted interference | |
| <ul style="list-style-type: none"> due to burst according to IEC 61000-4-4 | 3 kV / 5 kHz |
| <ul style="list-style-type: none"> due to conductor-earth surge according to IEC 61000-4-5 | 2 kV |
| <ul style="list-style-type: none"> due to conductor-conductor surge according to IEC 61000-4-5 | 1 kV |
| <ul style="list-style-type: none"> due to high-frequency radiation according to IEC 61000-4-6 | 10 V |

| | |
|--|---|
| field-based interference according to IEC 61000-4-3 | 10 V/m |
| electrostatic discharge according to IEC 61000-4-2 | 4 kV contact discharge / 8 kV air discharge |
| conducted HF interference emissions according to CISPR11 | Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC |
| field-bound HF interference emission according to CISPR11 | Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC |
| Electrical Safety | |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe |
| Main circuit | |
| number of poles for main current circuit | 3 |
| design of the switching contact | Hybrid |
| design of the switching contact as NO contact for signaling function | OUT, electronic, 24 V DC, 15 mA |
| adjustable current response value current of the current-dependent overload release | 1.6 ... 7 A |
| minimum load [%] | 20 %; from set rated current |
| type of the motor protection | solid-state |
| operating voltage rated value | 48 ... 500 V |
| relative symmetrical tolerance of the operating voltage | 10 % |
| operating frequency 1 rated value | 50 Hz |
| operating frequency 2 rated value | 60 Hz |
| relative symmetrical tolerance of the operating frequency | 10 % |
| operational current | |
| • at AC at 400 V rated value | 7 A |
| • at AC-3 at 400 V rated value | 7 A |
| • at AC-53a at 400 V at ambient temperature 40 °C rated value | 7 A |
| ampacity when starting maximum | 56 A |
| operating power for 3-phase motors at 400 V at 50 Hz | 0.55 ... 3 kW |
| derating temperature | 40 °C |
| Inputs/ Outputs | |
| input voltage at digital input | |
| • at DC rated value | 110 V |
| • with signal <0> at DC | 0 ... 40 V |
| • for signal <1> at DC | 79 ... 121 |
| input voltage at digital input | |
| • at AC rated value | 110 V |
| • with signal <0> at AC | 0 ... 40 V |
| • for signal <1> at AC | 93 ... 253 V |
| input current at digital input | |
| • for signal <1> at DC | 1.5 mA |
| • with signal <0> at DC | 0.25 mA |
| input current at digital input with signal <0> at AC | |
| • at 110 V | 0.2 mA |
| • at 230 V | 0.4 mA |
| input current at digital input for signal <1> at AC | |
| • at 110 V | 1.1 mA |
| • at 230 V | 2.3 mA |
| number of CO contacts for auxiliary contacts | 1 |
| operational current of auxiliary contacts at AC-15 at 230 V maximum | 3 A |
| operational current of auxiliary contacts at DC-13 at 24 V maximum | 1 A |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 110 ... 230 V |
| • at 60 Hz rated value | 110 ... 230 V |
| relative negative tolerance of the control supply voltage at AC at 60 Hz | 15 % |
| relative positive tolerance of the control supply voltage at AC at 60 Hz | 10 % |

| | |
|--|---|
| control supply voltage 1 at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 110 ... 230 V 110 ... 230 V |
| control supply voltage frequency | |
| <ul style="list-style-type: none"> • 1 rated value • 2 rated value | 50 Hz 60 Hz |
| relative negative tolerance of the control supply voltage at DC | 15 % |
| relative positive tolerance of the control supply voltage at DC | 10 % |
| control supply voltage 1 at DC rated value | 110 V |
| operating range factor control supply voltage rated value at DC | |
| <ul style="list-style-type: none"> • initial value • full-scale value | 0.85 1.1 |
| operating range factor control supply voltage rated value at AC at 50 Hz | |
| <ul style="list-style-type: none"> • initial value • full-scale value | 0.85 1.1 |
| operating range factor control supply voltage rated value at AC at 60 Hz | |
| <ul style="list-style-type: none"> • initial value • full-scale value | 0.85 1.1 |
| control current at AC | |
| <ul style="list-style-type: none"> • at 110 V in standby mode of operation • at 230 V in standby mode of operation • at 110 V when switching on • at 230 V when switching on • at 110 V during operation • at 230 V during operation | 16 mA 9 mA 55 mA 33 mA 36 mA 22 mA |
| control current at DC | |
| <ul style="list-style-type: none"> • in standby mode of operation • during operation | 6 mA 30 mA |
| inrush current peak | |
| <ul style="list-style-type: none"> • at AC at 110 V • at AC at 230 V • at AC at 110 V at switching on of motor • at AC at 230 V at switching on of motor | 1 200 mA 2 900 mA 1 200 mA 2 900 mA |
| duration of inrush current peak | |
| <ul style="list-style-type: none"> • at AC at 110 V • at AC at 230 V • at AC at 110 V at switching on of motor • at AC at 230 V at switching on of motor | 1 ms 1 ms 1 ms 1 ms |
| power loss [W] in auxiliary and control circuit | |
| <ul style="list-style-type: none"> • in switching state OFF <ul style="list-style-type: none"> — with bypass circuit • in switching state ON <ul style="list-style-type: none"> — with bypass circuit | 2.1 W 5.06 W |
| Response times | |
| ON-delay time | 60 ... 90 ms |
| OFF-delay time | 60 ... 90 ms |
| Power Electronics | |
| operational current | |
| <ul style="list-style-type: none"> • at 40 °C rated value • at 50 °C rated value • at 55 °C rated value • at 60 °C rated value | 7 A 6.1 A 5.2 A 4.6 A |
| Installation/ mounting/ dimensions | |
| mounting position | vertical, horizontal, standing (observe derating) |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail |
| height | 100 mm |
| width | 22.5 mm |

| | |
|---|---|
| depth | 141.6 mm |
| required spacing | |
| <ul style="list-style-type: none"> ● with side-by-side mounting <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 50 mm — downwards 50 mm — at the side 0 mm ● for grounded parts <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 50 mm — at the side 3.5 mm — downwards 50 mm | |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 4 000 m; For derating see manual |
| ambient temperature | |
| <ul style="list-style-type: none"> ● during operation -25 ... +60 °C ● during storage -40 ... +70 °C ● during transport -40 ... +70 °C | |
| environmental category during operation according to IEC 60721 | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| relative humidity during operation | 10 ... 95 % |
| air pressure according to SN 31205 | 900 ... 1 060 hPa |
| Communication/ Protocol | |
| protocol is supported | |
| <ul style="list-style-type: none"> ● PROFINET IO protocol No ● PROIsafe protocol No | |
| product function bus communication | No |
| protocol is supported AS-Interface protocol | No |
| Connections/ Terminals | |
| type of electrical connection | screw-type terminals for main circuit, spring-loaded terminals (push-in) for control circuit |
| <ul style="list-style-type: none"> ● for main current circuit screw-type terminals ● for auxiliary and control circuit spring-loaded terminals (push-in) | |
| wire length for motor unshielded maximum | 100 m |
| type of connectable conductor cross-sections for main contacts | |
| <ul style="list-style-type: none"> ● solid 1x (0,5 ... 4 mm²), 2x (0,5 ... 2,5 mm²) ● finely stranded with core end processing 1x (0,5 ... 4 mm²), 2x (0,5 ... 1,5 mm²) | |
| connectable conductor cross-section for main contacts | |
| <ul style="list-style-type: none"> ● solid or stranded 0.5 ... 4 mm² ● finely stranded with core end processing 0.5 ... 4 mm² | |
| connectable conductor cross-section for auxiliary contacts | |
| <ul style="list-style-type: none"> ● solid or stranded 0.5 ... 1.5 mm² ● finely stranded with core end processing 0.5 ... 1 mm² ● finely stranded without core end processing 0.5 ... 1.5 mm² | |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> ● for auxiliary contacts <ul style="list-style-type: none"> — solid 1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²) — finely stranded with core end processing 1x (0,5 ... 1,0 mm²), 2x (0,5 ... 1,0 mm²) — finely stranded without core end processing 1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²) ● for AWG cables for auxiliary contacts 1x (20 ... 16), 2x (20 ... 16) | |
| AWG number as coded connectable conductor cross section | |
| <ul style="list-style-type: none"> ● for main contacts 20 ... 12 ● for auxiliary contacts 20 ... 16 | |
| UL/CSA ratings | |
| yielded mechanical performance [hp] | |
| <ul style="list-style-type: none"> ● for single-phase AC motor <ul style="list-style-type: none"> — at 110/120 V rated value 0.25 hp — at 230 V rated value 0.5 hp | |

- for 3-phase AC motor
 - at 200/208 V rated value
 - at 220/230 V rated value
 - at 460/480 V rated value

1 hp
1.5 hp
3 hp
6.1 A

operational current at AC at 480 V according to UL 508

Approvals Certificates

General Product Approval



[Confirmation](#)



EMV

other

Environment



[Confirmation](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1007-3AA14>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1007-3AA14>





Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RM1007-3AA14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1007-3AA14&lang=en

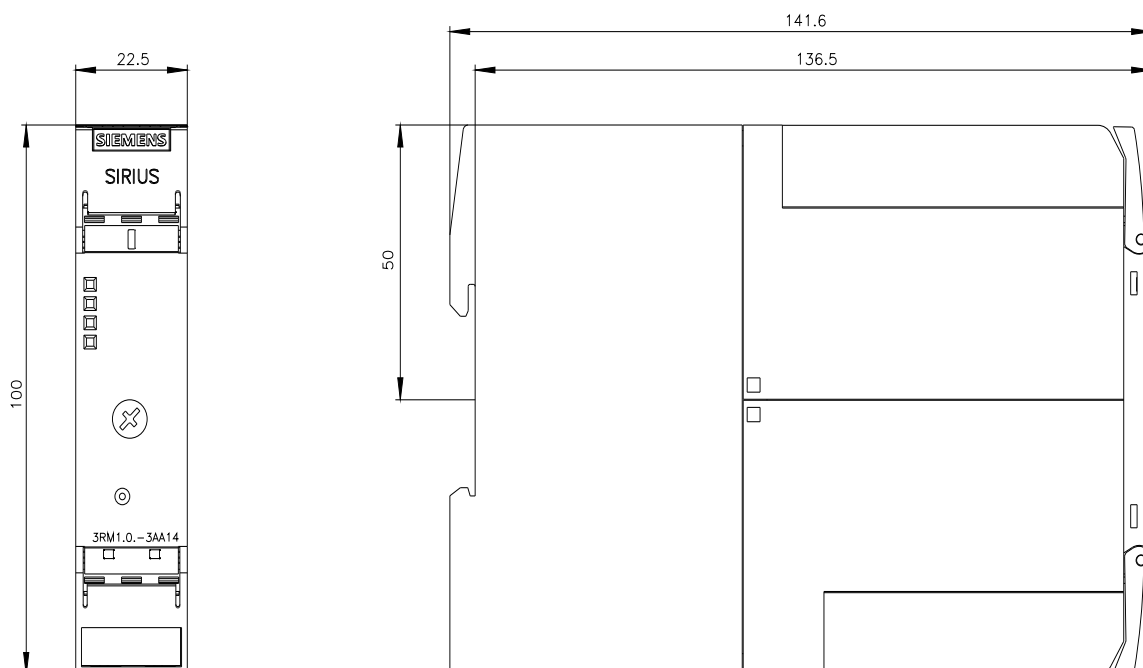

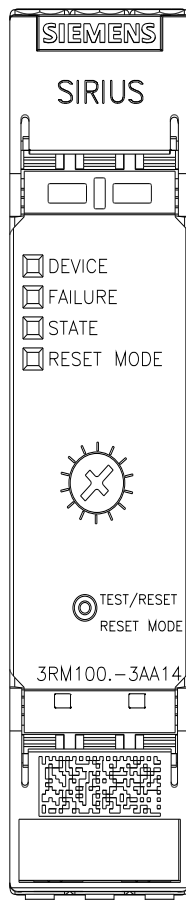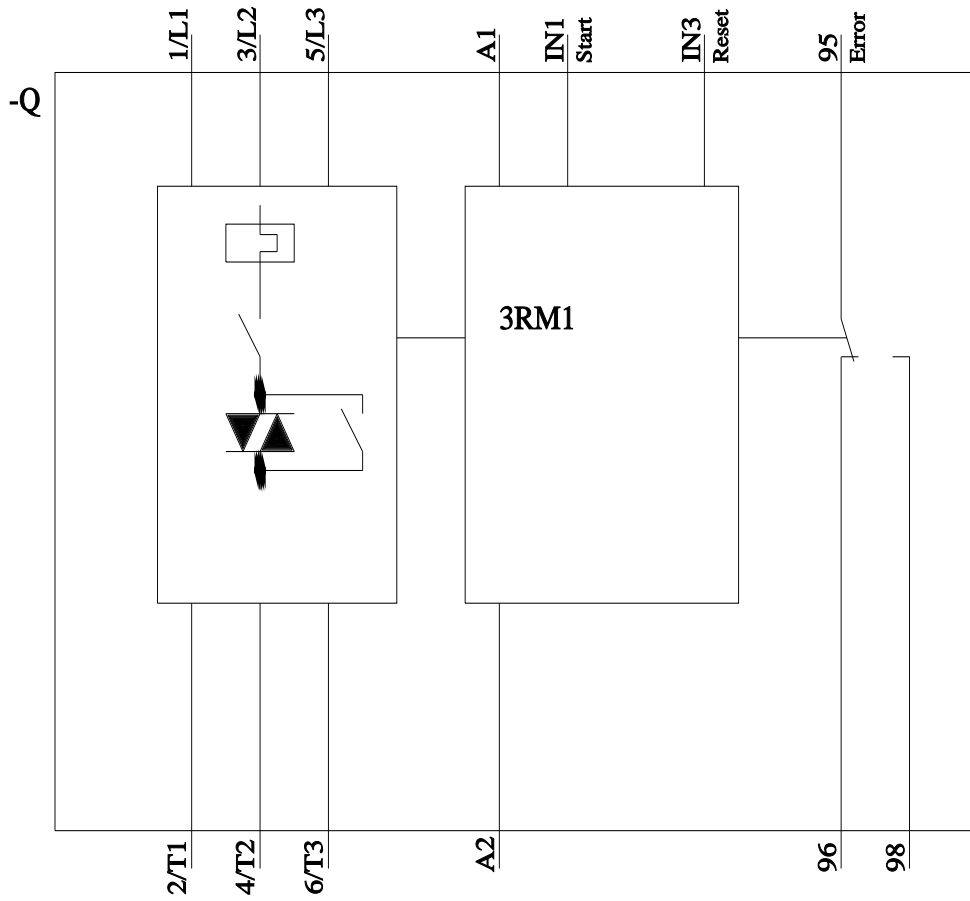

last modified:

3/11/2024