

URTK 6 - Test disconnect terminal block



3026272

<https://www.phoenixcontact.com/in/products/3026272>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Test disconnect terminal block, nom. voltage: 500 V, nominal current: 41 A, connection method: Screw connection, 1 level, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

Your advantages

- The URTK 6 test disconnect terminal block and the UGSK 6 slide-type terminal block were developed specifically for use in current transformer secondary circuits
- Can be fitted on both sides with fixed and switchable bridges as well as test sockets with 4 mm diameter

Commercial Data

Item number	3026272
Packing unit	50 pc
Minimum order quantity	1 pc
Sales Key	BE1
Product Key	BE1233
Catalog Page	Page 523 (C-1-2019)
GTIN	4017918168056
Weight per Piece (including packing)	30.902 g
Weight per Piece (excluding packing)	30.902 g
Customs tariff number	85369010
Country of origin	PL

URTK 6 - Test disconnect terminal block



3026272

<https://www.phoenixcontact.com/in/products/3026272>

Technical Data

Product properties

Product type	Test disconnect terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²
Test socket torque	0.6

1 level

Screw thread	M4
Tightening torque	1.2 ... 1.4 Nm
Stripping length	10 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 6 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 2.5 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	41 A
Maximum load current	57 A (with 10 mm ² conductor cross section)
Nominal voltage	500 V (when using bridge bars, the voltage is reduced to 400 V)
Nominal cross section	6 mm ²

Dimensions

URTK 6 - Test disconnect terminal block



3026272

<https://www.phoenixcontact.com/in/products/3026272>

Width	8.2 mm
End cover width	2 mm
Height NS 35/15	58.5 mm
Height NS 35/7,5	51 mm
Height	2.008 "
Height NS 32	56 mm
Length	91 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature \leq 45 K
Result	Test passed
Short-time withstand current 6 mm ²	0.72 kA
Short-time withstand current 10 mm ²	1.2 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

URTK 6 - Test disconnect terminal block



3026272

<https://www.phoenixcontact.com/in/products/3026272>

Open side panel	Yes
-----------------	-----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	5 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.5 mm ² / 0.3 kg
	6 mm ² / 1.4 kg
	10 mm ² / 2 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32
Screw thread	M3

URTK 6 - Test disconnect terminal block




3026272

<https://www.phoenixcontact.com/in/products/3026272>

Drawings

Circuit diagram

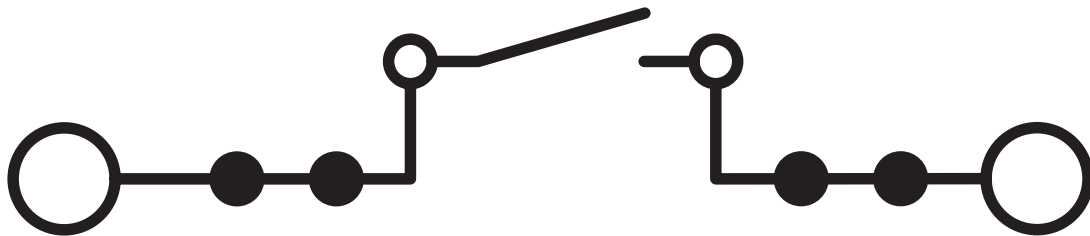


URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

Schematic diagram

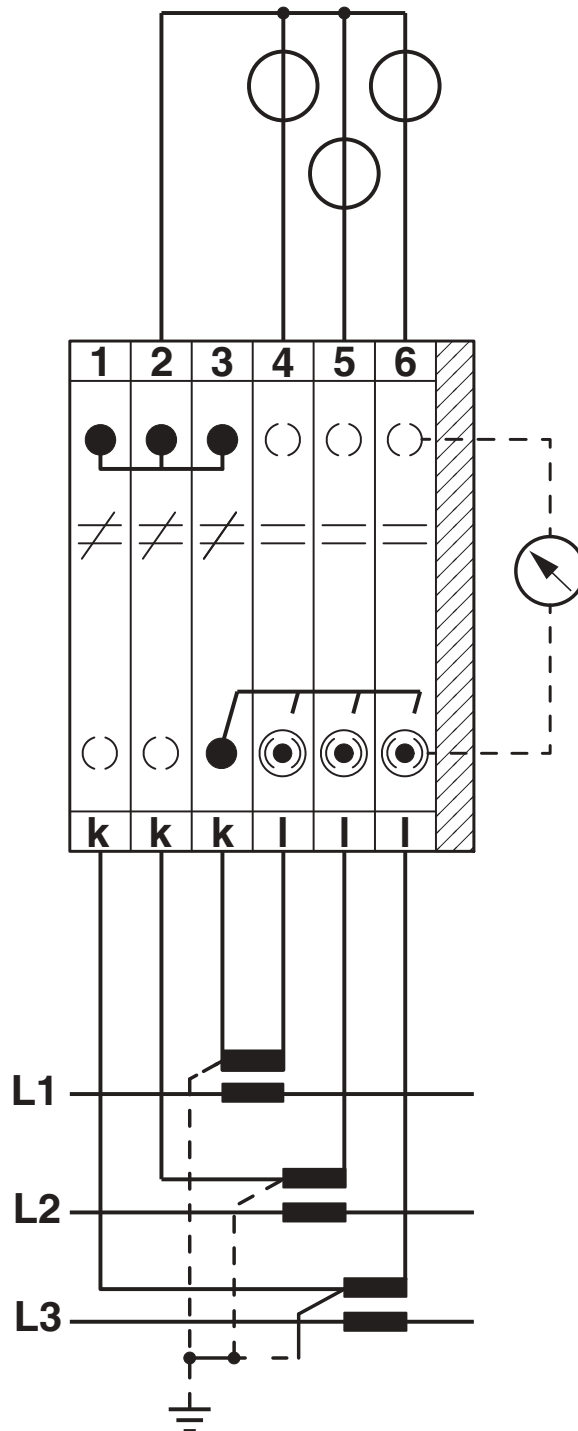

Three-phase linked transducer test set


URTK 6 - Test disconnect terminal block



3026272

<https://www.phoenixcontact.com/in/products/3026272>

Circuit diagram

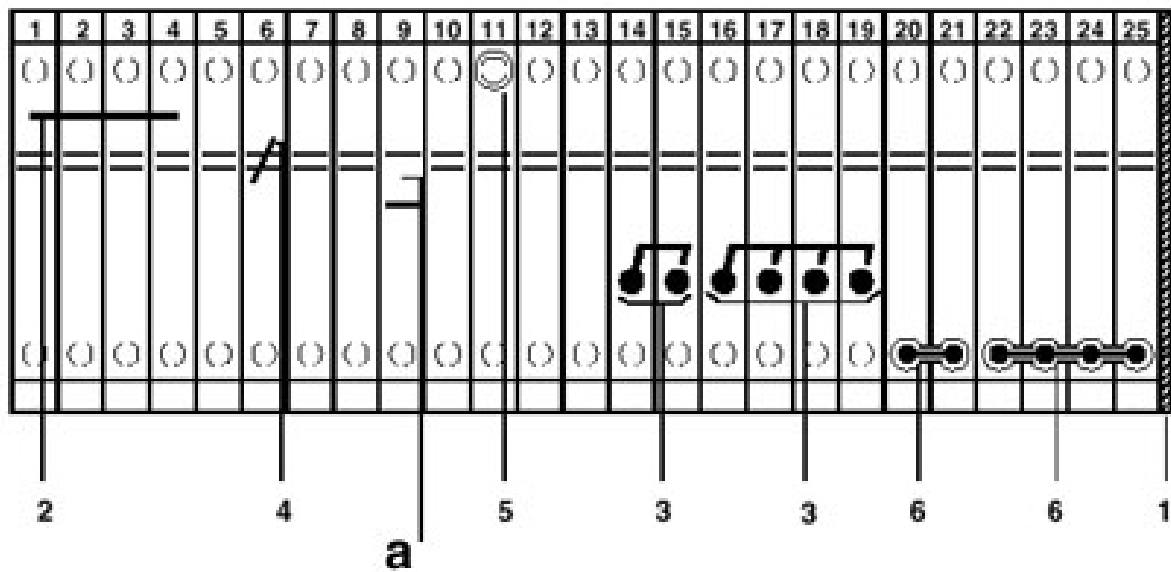


URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>



Schematic diagram

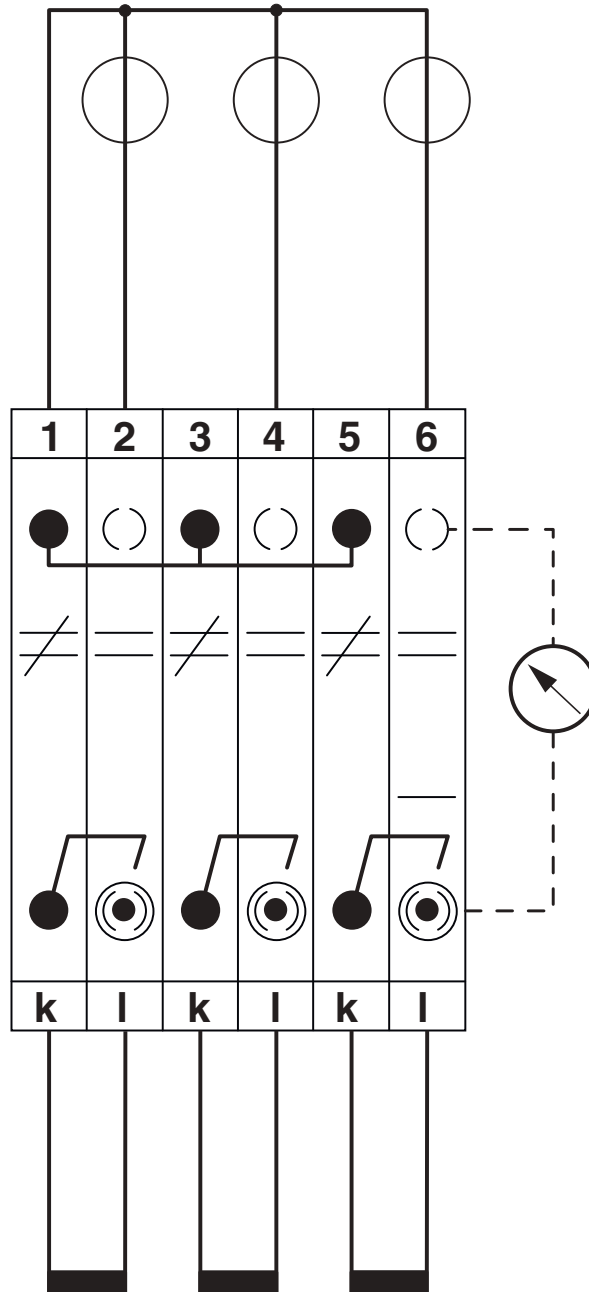

Three-phase transducer test set

URTK 6 - Test disconnect terminal block



3026272

<https://www.phoenixcontact.com/in/products/3026272>

Approvals



EAC

Approval ID: RU C-DE.BL08.B.00534



cULus Recognized

Approval ID: E60425

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B	300 V	50 A	26 - 8	-
Use group C	300 V	50 A	26 - 8	-

URTK 6 - Test disconnect terminal block



3026272

<https://www.phoenixcontact.com/in/products/3026272>

Classifications

ECLASS

ECLASS-11.0	27141126
ECLASS-12.0	27141126

ETIM

ETIM 8.0	EC000902
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

URTK 6 - Test disconnect terminal block



3026272

<https://www.phoenixcontact.com/in/products/3026272>

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

Accessories

 Note: Applying some accessories below might limit this product.


FBRI 10-8 N - Fixed bridge

2772080

<https://www.phoenixcontact.com/in/products/2772080>



Fixed bridge, pitch: 8.2 mm, number of positions: 10, color: silver

 Max. current carrying capacity: 45 A

SB 3-8-T - Switching jumper

3026492

<https://www.phoenixcontact.com/in/products/3026492>



Switching jumper, pitch: 8.2 mm, number of positions: 3, color: orange

 Max. current carrying capacity: 41 A

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

SB 10-8-T SO - Switching jumper

3026395

<https://www.phoenixcontact.com/in/products/3026395>



Switching jumper, pitch: 8.2 mm, number of positions: 10, color: orange

 Max. current carrying capacity: 41 A


SB 10-8-T - Switching jumper

3026382

<https://www.phoenixcontact.com/in/products/3026382>



Switching jumper, pitch: 8.2 mm, number of positions: 10, color: orange

 Max. current carrying capacity: 41 A

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

SB 4-8-T - Switching jumper

3026379

<https://www.phoenixcontact.com/in/products/3026379>



Switching jumper, pitch: 8.2 mm, number of positions: 4, color: orange

 Max. current carrying capacity: 41 A


SB 2-8-T - Switching jumper

3026366

<https://www.phoenixcontact.com/in/products/3026366>



Switching jumper, pitch: 8.2 mm, number of positions: 2, color: orange

 Max. current carrying capacity: 41 A

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>



EB 1/3/5/7-8 - Insertion bridge

3072340

<https://www.phoenixcontact.com/in/products/3072340>



Insertion bridge, pitch: 16.4 mm, number of positions: 4, pin assignment: 1, 3, 5, 7, length: 24 mm, color: gray

 Max. current carrying capacity: 41 A


EB 1/3/5-8 - Insertion bridge

3072341

<https://www.phoenixcontact.com/in/products/3072341>



Insertion bridge, pitch: 16.4 mm, number of positions: 3, pin assignment: 1,3,5, length: 24 mm, color: gray

 Max. current carrying capacity: 41 A

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

D-URTK 6 - End cover

3026340

<https://www.phoenixcontact.com/in/products/3026340>

End cover, length: 91 mm, width: 2 mm, height: 46.5 mm, color: gray



SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/in/products/1205066>

Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip



URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/in/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

SBS 8:UNBEDRUCKT - Marker card

1007235

<https://www.phoenixcontact.com/in/products/1007235>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

KSSI 2-8 - Short-circuit connector

3000722

<https://www.phoenixcontact.com/in/products/3000722>



Short-circuit connector, pitch: 8 mm, number of positions: 2, length: 11 mm, color: black

KSSI 4-8 - Short-circuit connector

3000735

<https://www.phoenixcontact.com/in/products/3000735>



Short-circuit connector, pitch: 8 mm, number of positions: 4, color: black

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

ATP-URTK/SP - Partition plate

0311139

<https://www.phoenixcontact.com/in/products/0311139>

Partition plate, length: 99 mm, width: 2 mm, height: 64 mm, color: gray



S-URTK/SP - Switching lock

0311155

<https://www.phoenixcontact.com/in/products/0311155>

Switching lock, length: 12 mm, width: 8.2 mm, color: white



URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

SL-SB - Switching lock

3035761

<https://www.phoenixcontact.com/in/products/3035761>



Switching lock, for additional locking of short-circuit switching elements in current transformer measuring circuits, length: 16.3 mm, width: 12.5 mm, height: 13.6 mm, color: white

AP-ME

METER - Cover profile

3034361

<https://www.phoenixcontact.com/in/products/3034361>



Cover profile, for covering terminal strips, snapped onto APT-ME cover profile carrier or APH-ME end bracket. A cover profile carrier should be positioned at the ends and at intervals of around 40 cm. Length supplied: 1 m

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

APH-ME - Cover profile carrier

3034374

<https://www.phoenixcontact.com/in/products/3034374>



Cover profile carrier, for mounting on NS 35/7,5 DIN rail, for fixing the AP-ME cover profile, can be sealed as an option

APT-ME - Cover profile carrier

3034358

<https://www.phoenixcontact.com/in/products/3034358>



Cover profile carrier for mounting on NS 35/7.5 DIN rail for attaching the cover profile AP-ME

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

AH-ME - Covering hood

3240265

<https://www.phoenixcontact.com/in/products/3240265>



Cover, for the contact- and dust-protected encapsulation of the components

TS-UT 6-T/SP - Separating plate

3072821

<https://www.phoenixcontact.com/in/products/3072821>



Separating plate, length: 105.2 mm, width: 1 mm, height: 67.5 mm, color: gray

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

SCP 2-8 - Short-circuit connector

3070402

<https://www.phoenixcontact.com/in/products/3070402>



Short-circuit connector, pitch: 8.15 mm, number of positions: 2, color: orange

SCP 3-8 - Short-circuit connector

3070403

<https://www.phoenixcontact.com/in/products/3070403>



Short-circuit connector, pitch: 8.15 mm, number of positions: 3, color: orange

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

SCP 4-8 - Short-circuit connector

3070404

<https://www.phoenixcontact.com/in/products/3070404>



Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange

SCPI 2-8 - Short-circuit connector

3070423

<https://www.phoenixcontact.com/in/products/3070423>



Short-circuit connector, pitch: 8.15 mm, number of positions: 2, color: orange

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

SCPI 4-8 - Short-circuit connector

3070424

<https://www.phoenixcontact.com/in/products/3070424>



Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange

NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/in/products/1201002>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/in/products/1201015>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/in/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/in/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/in/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/in/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/in/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/in/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/in/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/in/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/in/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/in/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/in/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/in/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/in/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/in/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/in/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/in/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/in/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/in/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/in/products/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/in/products/1052002>



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/in/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

URTK 6 - Test disconnect terminal block



3026272

<https://www.phoenixcontact.com/in/products/3026272>

UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/in/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/in/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/in/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/in/products/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/in/products/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/in/products/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/in/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/in/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>



CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/in/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/in/products/0800886>



End clamp, width: 9.5 mm, color: gray

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

E/UK - End clamp

1201442

<https://www.phoenixcontact.com/in/products/1201442>



End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35

E/UK 1 - End clamp

1201413

<https://www.phoenixcontact.com/in/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

PSBJ-URTK 6 FARBLOS - Female test connector

3026450

<https://www.phoenixcontact.com/in/products/3026450>



Female test connector, number of positions: 1, color: transparent

PSBJ-URTK 6 RD - Female test connector

3026719

<https://www.phoenixcontact.com/in/products/3026719>



Female test connector, number of positions: 1, color: red

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

PSBJ-URTK 6 BU - Female test connector

3026434

<https://www.phoenixcontact.com/in/products/3026434>



Female test connector, number of positions: 1, color: blue

PSBJ-URTK 6 YE - Female test connector

3026405

<https://www.phoenixcontact.com/in/products/3026405>



Female test connector, number of positions: 1, color: yellow

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

PSBJ-URTK 6 GN - Female test connector

3026418

<https://www.phoenixcontact.com/in/products/3026418>



Female test connector, number of positions: 1, color: green

PSBJ-URTK 6 VT - Female test connector

3026421

<https://www.phoenixcontact.com/in/products/3026421>



Female test connector, number of positions: 1, color: violet

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>

PSBJ-URTK 6 GY - Female test connector

3026612

<https://www.phoenixcontact.com/in/products/3026612>



Female test connector, number of positions: 1, color: gray

PSBJ-URTK 6 BK - Female test connector

3026447

<https://www.phoenixcontact.com/in/products/3026447>



Female test connector, number of positions: 1, color: black

URTK 6 - Test disconnect terminal block

3026272

<https://www.phoenixcontact.com/in/products/3026272>



PSBJ-URTK 6 BN - Female test connector

3026971

<https://www.phoenixcontact.com/in/products/3026971>



Female test connector, number of positions: 1, color: brown

PSBJ-URTK 6 WH - Female test connector

3026448

<https://www.phoenixcontact.com/in/products/3026448>



Female test connector, number of positions: 1, color: white

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in