

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Protective conductor double-level terminal block, connection method: Push-in connection, 1st and 2nd level, cross section: 0.14 mm² - 1.5 mm², mounting type: NS 35/7,5, NS 35/15, color: green-yellow

Your advantages

- The compact design and front connection enable wiring in a confined space
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors

Commercial data

Item number	3214673
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE2
Product key	BE2224
Catalog page	Page 45 (C-1-2019)
GTIN	4046356616157
Weight per piece (including packing)	10.632 g
Weight per piece (excluding packing)	10.632 g
Customs tariff number	85369010
Country of origin	PL

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

Technical data

Product properties

Product type	Ground terminal block
Number of connections	4
Number of rows	2

Data management status

Article revision	08
------------------	----

Insulation characteristics

Overvoltage category	III
----------------------	-----

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Grounding foot	Yes
Number of connections per level	2
Nominal cross section	1.5 mm ²

1st and 2nd level

Note	Please observe the current carrying capacity of the DIN rails.
Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A1 / B1
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	0.14 mm ² ... 1.5 mm ²
Cross section AWG	26 ... 16 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	26 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 1 mm ² Using the AI-S 1-8 TQ ferrule, Item No. 1200293, is recommended

1st and 2nd level Connection cross sections directly pluggable

Conductor cross section rigid	0.25 mm ² ... 1.5 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.34 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.34 mm ² ... 1 mm ²

Ex data

Rated data (ATEX/IECEx)

Identification	Ⓔ II 2 GD Ex eb IIC Gb
Operating temperature range	-60 °C ... 110 °C

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

Ex-certified accessories	3214576 D-PTS 1,5/S
	1204504 SZF 0-0,4X2,5
	3022276 CLIPFIX 35-5
	3022218 CLIPFIX 35
output	(Permanent)

Ex connection data General

Nominal cross section	1.5 mm ²
Rated cross section AWG	16
Connection capacity rigid	0.14 mm ² ... 1.5 mm ²
Connection capacity AWG	26 ... 16
Connection capacity flexible	0.14 mm ² ... 1.5 mm ²
Connection capacity AWG	26 ... 16

Dimensions

Width	3.5 mm
End cover width	2.2 mm
Height	78.8 mm
Depth on NS 35/7,5	48.2 mm
Depth on NS 35/15	55.7 mm

Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	$6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-2
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15


PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

Drawings

Circuit diagram

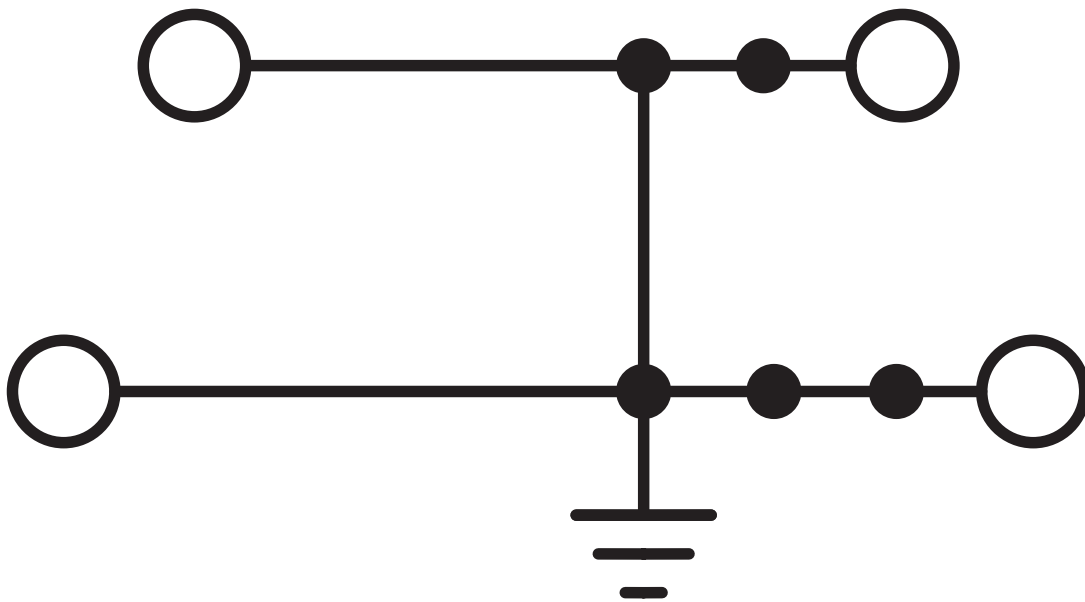

PTTBS 1,5/S-PE - Protective conductor double-level terminal block





3214673


<https://www.phoenixcontact.com/in/products/3214673>


Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/3214673>

 CSA Approval ID: 13631	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	-	-	26 - 14	-

 EAC Approval ID: RU C-DE.BL08.B.00644

 cULus Recognized Approval ID: E60425	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	-	-	26 - 14	-
Use group C	-	-	26 - 14	-
Use group D	-	-	26 - 14	-

 LR Approval ID: LR2371832TA

 ClassNK Approval ID: 14ME0912

 BV Approval ID: 39980/B0 BV

DNV Approval ID: TAE000010T

 IECEx Approval ID: IECEx SEV13.0005U
--

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>



ATEX

Approval ID: SEV13ATEX0159U



CCC

Approval ID: 2020322313000631



UKCA-EX

Approval ID: CML 22UKEX1224U

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

Classifications

ECLASS

ECLASS-11.0	27141141
ECLASS-13.0	27250104

ETIM

ETIM 9.0	EC000901
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

EF3.0 Climate Change

CO2e kg	0.07 kg CO2e
---------	--------------

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

Accessories

 Note: Applying some accessories below might limit this product.

FBS 2-3,5 - Plug-in bridge

3213014

<https://www.phoenixcontact.com/in/products/3213014>



Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: red

FBS 3-3,5 - Plug-in bridge

3213027

<https://www.phoenixcontact.com/in/products/3213027>



Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: red

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

FBS 4-3,5 - Plug-in bridge

3213030

<https://www.phoenixcontact.com/in/products/3213030>



Plug-in bridge, pitch: 3.5 mm, number of positions: 4, color: red

FBS 5-3,5 - Plug-in bridge

3213043

<https://www.phoenixcontact.com/in/products/3213043>



Plug-in bridge, pitch: 3.5 mm, number of positions: 5, color: red

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

FBS 10-3,5 - Plug-in bridge

3213056

<https://www.phoenixcontact.com/in/products/3213056>



Plug-in bridge, pitch: 3.5 mm, number of positions: 10, color: red

FBS 20-3,5 - Plug-in bridge

3213069

<https://www.phoenixcontact.com/in/products/3213069>



Plug-in bridge, pitch: 3.5 mm, number of positions: 20, color: red

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

FBS 2-3,5 BU - Plug-in bridge

3213086

<https://www.phoenixcontact.com/in/products/3213086>



Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: blue

FBS 3-3,5 BU - Plug-in bridge

3213099

<https://www.phoenixcontact.com/in/products/3213099>



Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: blue

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

FBS 4-3,5 BU - Plug-in bridge

3213109

<https://www.phoenixcontact.com/in/products/3213109>



Plug-in bridge, pitch: 3.5 mm, number of positions: 4, color: blue

FBS 5-3,5 BU - Plug-in bridge

3213112

<https://www.phoenixcontact.com/in/products/3213112>



Plug-in bridge, pitch: 3.5 mm, number of positions: 5, color: blue

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

FBS 10-3,5 BU - Plug-in bridge

3213125

<https://www.phoenixcontact.com/in/products/3213125>



Plug-in bridge, pitch: 3.5 mm, number of positions: 10, color: blue

FBS 20-3,5 BU - Plug-in bridge

3213138

<https://www.phoenixcontact.com/in/products/3213138>



Plug-in bridge, pitch: 3.5 mm, number of positions: 20, color: blue

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

FBS 2-3,5 GY - Plug-in bridge

3213153

<https://www.phoenixcontact.com/in/products/3213153>



Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: gray

FBS 3-3,5 GY - Plug-in bridge

3213167

<https://www.phoenixcontact.com/in/products/3213167>



Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: gray

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

FBS 4-3,5 GY - Plug-in bridge

3213180

<https://www.phoenixcontact.com/in/products/3213180>



Plug-in bridge, pitch: 3.5 mm, number of positions: 4, color: gray

FBS 5-3,5 GY - Plug-in bridge

3213183

<https://www.phoenixcontact.com/in/products/3213183>



Plug-in bridge, pitch: 3.5 mm, number of positions: 5, color: gray

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

FBS 10-3,5 GY - Plug-in bridge

3213196

<https://www.phoenixcontact.com/in/products/3213196>



Plug-in bridge, pitch: 3.5 mm, number of positions: 10, color: gray

FBS 20-3,5 GY - Plug-in bridge

3213206

<https://www.phoenixcontact.com/in/products/3213206>



Plug-in bridge, pitch: 3.5 mm, number of positions: 20, color: gray

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>


FBS 50-3,5 - Plug-in bridge

3000706

<https://www.phoenixcontact.com/in/products/3000706>



Plug-in bridge, pitch: 3.5 mm, number of positions: 50, color: red

 Max. current carrying capacity: 17.5 A

FBS 50-3,5 BU - Plug-in bridge

3000708

<https://www.phoenixcontact.com/in/products/3000708>



Plug-in bridge, pitch: 3.5 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 17.5 A

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>


FBS 50-3,5 GY - Plug-in bridge

3000707

<https://www.phoenixcontact.com/in/products/3000707>



Plug-in bridge, pitch: 3.5 mm, number of positions: 50, color: gray

 Max. current carrying capacity: 17.5 A

ATP-STTB 4 - Partition plate

3030747

<https://www.phoenixcontact.com/in/products/3030747>

Partition plate, depth: 53 mm, width: 2 mm, height: 88.7 mm, color: gray



PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

D-PTTBS 1,5/S - End cover

3214699

<https://www.phoenixcontact.com/in/products/3214699>

End cover, depth: 41 mm, width: 2.2 mm, height: 78.6 mm, color: gray



STP 3,5-2 - Marker carriers

0830131

<https://www.phoenixcontact.com/in/products/0830131>



Marker carriers, snaps into the PTTB 1,5/S Push-in double-level terminal block, can be marked with UCT-TM 3,5, UCT-TMF 3,5, ZB 3,5, or ZBF 3,5, gray, unlabeled, mounting type: plug in, lettering field size: 3.5 x 10.5 mm

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

AI-S 1 - 8 TQ - Ferrule

1200293

<https://www.phoenixcontact.com/in/products/1200293>



Ferrule, S-Slimline, sleeve length: 8 mm, color: turquoise

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/in/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/in/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/in/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/in/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/in/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/in/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/in/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/in/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/in/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/in/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/in/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/in/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/in/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/in/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/in/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/in/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/in/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/in/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/in/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

ZB 3,5:UNBEDRUCKT - Zack marker strip

0829414

<https://www.phoenixcontact.com/in/products/0829414>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 3.5 x 10.5 mm, Number of individual labels: 10

ZB 3,5 CUS - Zack marker strip

0829415

<https://www.phoenixcontact.com/in/products/0829415>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 3.5 mm, lettering field size: 3.5 x 10.5 mm, Number of individual labels: 10

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

ZB 3,5,LGS:FORTL.ZAHLEN - Zack marker strip

0801404

<https://www.phoenixcontact.com/in/products/0801404>




Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 3.5 x 10.5 mm, Number of individual labels: 10

ZB 3,5,QR:FORT.ZAHLEN - Zack marker strip

0801405

<https://www.phoenixcontact.com/in/products/0801405>



Zack marker strip, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 3.5 x 10.5 mm, Number of individual labels: 10

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

UCT-TM 3,5 - Marker for terminal blocks

0829484

<https://www.phoenixcontact.com/in/products/0829484>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 2.95 x 10.5 mm, Number of individual labels: 102

UCT-TM 3,5 CUS - Marker for terminal blocks

0829581

<https://www.phoenixcontact.com/in/products/0829581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 3.5 mm, lettering field size: 2.95 x 10.5 mm, Number of individual labels: 102

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

GBS 3,5-25X3,5 - Group marker label for terminal marking

0830290

<https://www.phoenixcontact.com/in/products/0830290>



Group marking label, snaps into terminal center for push-in terminal blocks ...1.
5/S,
Lettering field 25 x 3.5 mm, pitch 3.5 mm, labeled with EML (24 x 3)R

GBS 3,5-25X12 - Group marker label for terminal marking

0830292

<https://www.phoenixcontact.com/in/products/0830292>



Group marking label, snaps into terminal center for push-in terminal blocks ...1.
5/S,
Lettering field 25 x 12 mm, pitch 3.5 mm, labeled with EML (25.4 x 12.7)R

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/in/products/0201744>



Test plug, with solder connection up to 1 mm² conductor cross section, number of positions: 1, color: gray

MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/in/products/0201663>

Insulating sleeve, color: white



PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/in/products/0201676>

Insulating sleeve, color: red



MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/in/products/0201689>

Insulating sleeve, color: blue



PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/in/products/0201692>

Insulating sleeve, color: yellow



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/in/products/0201702>

Insulating sleeve, color: green



PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/in/products/0201728>

Insulating sleeve, color: gray



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/in/products/0201731>

Insulating sleeve, color: black



PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

PS-3,5 - Test plug

3031010

<https://www.phoenixcontact.com/in/products/3031010>



Test plug, Modular test plug, number of positions: 1, color: red

DP PS-3,5 - Spacer plate

3031011

<https://www.phoenixcontact.com/in/products/3031011>



Spacer plate, depth: 33.5 mm, width: 3.5 mm, height: 15.9 mm, number of positions: 1, color: red

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

PS-3,5/E - Test plug

3031012

<https://www.phoenixcontact.com/in/products/3031012>



Test plug, Individual test plug, number of positions: 1, color: red

ZBF 3,5:UNBEDRUCKT - Zack Marker strip, flat

0829392

<https://www.phoenixcontact.com/in/products/0829392>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 3.5 x 5.2 mm, Number of individual labels: 10

PTTBS 1,5/S-PE - Protective conductor double-level terminal block

3214673

<https://www.phoenixcontact.com/in/products/3214673>

ZBF 3,5 CUS - Zack Marker strip, flat

0829394

<https://www.phoenixcontact.com/in/products/0829394>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 3.5 mm, lettering field size: 3.5 x 5.2 mm, Number of individual labels: 10

ZBF 3,5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0801406

<https://www.phoenixcontact.com/in/products/0801406>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 5.15 x 3.5 mm, Number of individual labels: 10

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

ZBF 3,5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0801407

<https://www.phoenixcontact.com/in/products/0801407>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 5.15 x 3.5 mm, Number of individual labels: 10

UCT-TMF 3,5 - Marker for terminal blocks

0829486

<https://www.phoenixcontact.com/in/products/0829486>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 3.5 mm, lettering field size: 2.7 x 4.7 mm, Number of individual labels: 108

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

UCT-TMF 3,5 CUS - Marker for terminal blocks

0829644

<https://www.phoenixcontact.com/in/products/0829644>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 3.5 mm, lettering field size: 2.7 x 4.7 mm, Number of individual labels: 108

SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/in/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

SZF 0-0,4X2,5 - Screwdriver

1204504

<https://www.phoenixcontact.com/in/products/1204504>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

ST-BW 0 - Actuation tool

1200135

<https://www.phoenixcontact.com/in/products/1200135>



Actuation tool, for all 1.5 mm² spring cages from PT 1,5/S and FT 1,5/S

PTTBS 1,5/S-PE - Protective conductor double-level terminal block



3214673

<https://www.phoenixcontact.com/in/products/3214673>

PROJECT COMPLETE - Software

1050453

<https://www.phoenixcontact.com/in/products/1050453>



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in