


Data Sheet | Item Number: 2787-2144

Power supply; Pro 2; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost + PowerBoost; communication capability

<https://www.wago.com/2787-2144>

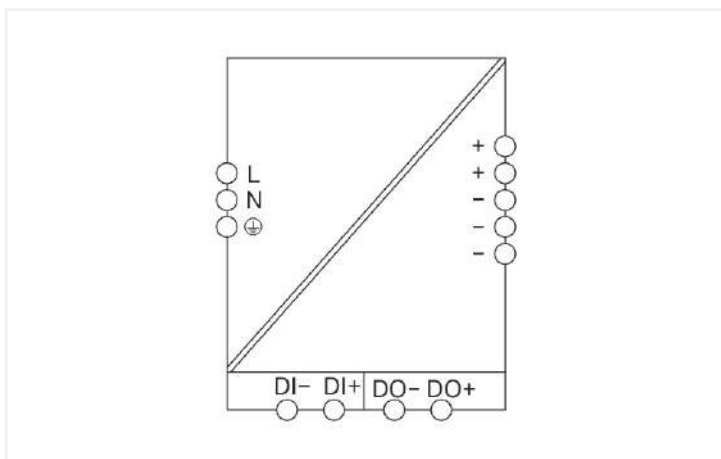

Features:

- Power supply with TopBoost, PowerBoost and configurable overload behavior
- Configurable digital signal input and output, optical status indication, function keys
- Communication interface for configuration and monitoring
- Optional connection to IO-Link, EtherNet/IP™, Modbus TCP or Modbus RTU
- Suitable for both parallel and series operation
- Natural convection cooling when horizontally mounted
- Pluggable connection technology
- Electrically isolated output voltage (SELV/PELV) per EN 61010-2-201/UL 61010-2-201
- Marker slot for WAGO marking cards (WMB) and WAGO marking strips

Technical data

Input

Phases	1
Nominal input voltage $U_{i, \text{nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 90 ... 264 V; DC 130 ... 240 V
Nominal mains frequency range	50 ... 60 Hz
Input current I_i	$\leq 1 \text{ A}$ (240 VAC; nominal load); $\leq 1.8 \text{ A}$ (100 VAC; nominal load)
Inrush current	$\leq 9 \text{ A}$ (after 1 ms)
Power factor correction (PFC)	active
Mains failure hold-up time	$\geq 20 \text{ ms}$ (230 VAC)

Output

Nominal output voltage $U_{o, \text{nom}}$	DC 24 V (SELV)
Output voltage range	DC 24 ... 28 V (adjustable)
Default setting	DC 24 V
Nominal output current $I_{o, \text{nom}}$	5 A (24 VDC)
Nominal output power	120 W
Deviation	$\leq 1 \%$
Residual ripple	$\leq 70 \text{ mV}$ (peak-to-peak)
Current limitation	$1.1 \times I_{o, \text{nom}}$ (typ.)
Overload behavior	TopBoost/PowerBoost/Time-limited constant current mode (other overload behaviors can be set)

Output

PowerBoost	DC 7.5 A (5 s)
TopBoost	Up to 600 %

Signaling and communication

Signaling	Optical status indication (DC OK; load; warning and error states) Digital signal input and output (DI/DO)
Communication	USB (Communication Cable 750-923) Ethernet/IP (Communication Module 2789-9023) IO-Link (Communication Module 2789-9080) Modbus RTU (Communication Module 2789-9015) Modbus TCP (Communication Module 2789-9052)

Efficiency/power losses

Power loss P_1	≤ 1 W (standby); ≤ 2 W (no load); ≤ 10 W (230 VAC; nominal load)
Efficiency (typ.)	93.8 % (230 VAC; 5 A; 25 °C)

Circuit protection

Internal fuse	T 6.3 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	16 A (for USA/Canada: 15 A)

Safety and protection

Isolation voltage (pri.-sec., AC)	3510 V
Isolation voltage (pri.-PE, AC)	2200 V
Isolation voltage (sec.-PE)	DC 0.5 kV
Isolation voltage (sec.-signal)	DC 0.5 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	\leq DC 35 V
Overvoltage category	III (≤ 2000 m a.s.l.); II (> 2000 m a.s.l.)
Pollution degree	2
Transient suppression (primary)	Yes
Overvoltage protection; secondary	Internal protective circuit ≤ 35 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	$> 1,000,000$ h (per IEC 61709)

Connection data

Connection type 1	Input/output/signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 721 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	2.5 ... 1.5 mm ² / 12 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	1.5 ... 0.08 mm ² / 16 ... 28 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	35 mm / 1.378 inches
Height	130 mm / 5.118 inches
Depth from upper-edge of DIN-rail	130 mm / 5.118 inches
Note (dimensions)	Height without connector Height with connector: 166 mm

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	0 MJ
Weight	650 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	See instruction leaflet
Operating altitude (max.)	5000 m

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 61010-1 UL 61010-2-201 SEMI F47

Commercial data

ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143907415
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 61010-2-201	E255817

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for hazardous areas



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	UL 121201	A-E198726

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 2787-2144

Documentation

Manual
Product Manual Power supply; Pro 2; 1-phase; 24 VDC output voltage; 5 A output current V 1.2.2 18.02.2022 pdf 7997.98 KB

Bid Text
2787-2144_EUSA 04.07.2019 docx 23.34 KB
2787-2144_EUSA 04.07.2019 xml 7.90 KB
ausschreiben.de 2787-2144

Instruction Leaflet
WAGO Pro 2 Power Supplies V 1.1.0 26.04.2021 pdf 4445.43 KB

CAD/CAE-Data

CAD data	
2D/3D Models 2787-2144	↓

CAE data	
EPLAN Data Portal 2787-2144	↓
ZUKEN Portal 2787-2144	↓

Engineering-Software

Configuration and Commissioning Software				
WAGO Interface Configuration Software G2 FULL	1.00.10.01 20.01.2022	exe	112213.07 KB	↓
WAGO Interface Configuration Software G2 SMALL	1.00.10.01 20.01.2022	exe	30238.22 KB	↓

Runtime Software

Firmware				
2787-2144, Stromversorgung; Pro 2	V 010513 13.10.2021	zip	1087.50 KB	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Communication cable



Item No.: 750-923/000-001
Configuration cable; USB connector;
Length: 5 m

1.1.2 Communication

1.1.2.1 Communication cable



Item No.: 750-923
Configuration cable; USB connector;
Length: 2.5 m

1.1.2.2 Communication module



Item No.: 2789-9023

Communication module; EtherNet/IP; communication capability

Item No.: 2789-9080

Communication module; IO-Link; communication capability

Item No.: 2789-9015

Communication module; Modbus RTU; RJ45; communication capability

Item No.: 2789-9052

Communication module; Modbus TCP; communication capability

1.1.3 Marking

1.1.3.1 Marker



Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.3.2 Marker carrier



Item No.: 2789-1233

Marker carrier; for WMB or marking strips; Length: 33 mm

1.1.3.3 Marking strip



Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.4 Tool

1.1.4.1 Operating tool



Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Item No.: 210-721

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured