



## Data Sheet | Item Number: 289-544

Interface module; with solder pin; Male connector; 50-pole; for mating connectors with IDC; Vertical mounting; PCB terminal blocks, triple-row; in mounting carrier; 2,50 mm<sup>2</sup>

<https://www.wago.com/289-544>

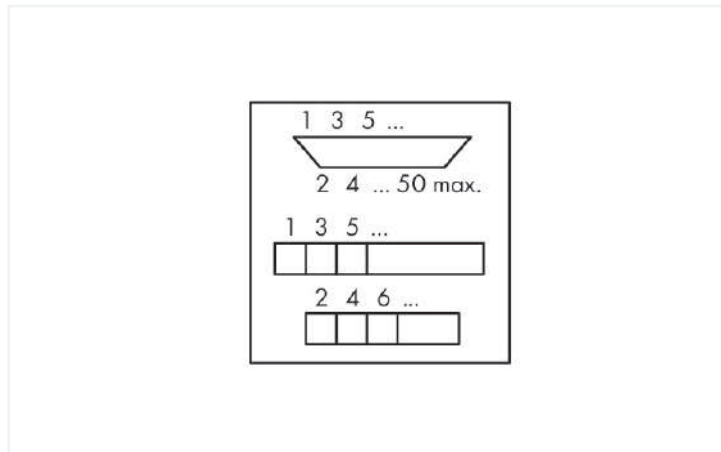

Similar to illustration

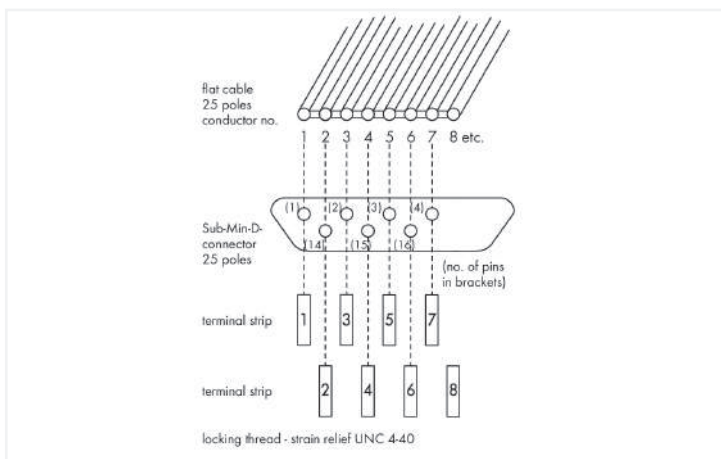

### Electrical data

Operating voltage	≤ AC/DC 125 V
Nominal current	2 A
Contact resistance (max.)	30 mΩ

### Safety and protection

Rated voltage	125 V
Pollution degree	2
Protection type	IP00; <b>Notice!</b> Live parts can be easily touched! Protection against direct contact must be provided by the equipment manufacturer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be observed for each individual application.
Dielectric strength (channel/channel) (AC, 1 min.)	0.75 kVrms
Insulation type	Functional insulation

## Connection data

Performance level	2 / 200 mating cycles
Strain relief	UNC 4-40 stud bolt

## Connection 1

Connector	D-subminiature male connector
Pole number 1	50
Connection type 1	System
Note (conductor cross-section)	12 AWG: THHN, THWN
Mating direction	vertical

## Connection 2

Design 2	PCB terminal blocks (triple-row)
Pole number 2	50
Connection type 2	Field
Connection technology 2	CAGE CLAMP®
WAGO connector 2	WAGO 236 Series
Solid conductor 2	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor 2	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length 2	5 ... 6 mm / 0.2 ... 0.24 inches

## Physical data

Width	94 mm / 3.701 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	34 mm / 1.339 inches

## Mechanical data

Mounting type	DIN-35 rail
Housing design	Mounting carrier

## Material data

Contact material (connector)	Au over Ni
Fire load	1.318 MJ
Weight	126.8 g

## Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
Ambient temperature (storage)	-40 ... +70 °C
Relative humidity	≤ 85% (non-condensing)

## Standards and specifications

Standards/specifications	EN 61010-2-201
--------------------------	----------------

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-14-11-52
eCl@ss 9.0	27-14-11-52
ETIM 8.0	EC002780
ETIM 7.0	EC002780
PU (SPU)	3 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454452216
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	8bebd6e9-0e05-4fdf-811c-c5dba1336061
SCIP notification number (Belgium)	1d5364e5-40a2-42f1-9a8c-0a701b7351f2
SCIP notification number (Bulgaria)	9862e7f8-588b-4846-b592-95fda5f5358b
SCIP notification number (Czech Republic)	5e3085b6-bbc1-4eb0-8b33-6042c5593337
SCIP notification number (Denmark)	657cde4d-0221-47e6-b60f-949a5a95c85d
SCIP notification number (Finland)	5b7ecd8d-9faf-45a2-ad55-a0516bdbc4f5
SCIP notification number (France)	390fd549-2e39-4b57-a047-e1dd392ff083
SCIP notification number (Germany)	ba33c737-df4e-4840-a3ea-7137eef4b5a9
SCIP notification number (Hungary)	c873c66a-91f6-4e54-ace1-fcb04fd21cb2
SCIP notification number (Italy)	962eb620-d19a-4cb7-a302-229d921905a0
SCIP notification number (Netherlands)	d5a3c85f-2626-403c-aa04-35017d70a01d
SCIP notification number (Poland)	55f60432-5532-4bf8-a386-9ff01ec9cbb3
SCIP notification number (Romania)	62c70e42-5127-4358-8741-e26fe3aa7535
SCIP notification number (Sweden)	dac45454-af16-4194-940a-05dec65e861f

### Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
UL	UL 508	E175199 Vol.2 Sec.1	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)			UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 289-544



## Documentation

### Bid Text

289-544

06.02.2015

doc

26.00 KB



### Instruction Leaflet

pdf

1246.19 KB



## CAD/CAE-Data

### CAE data

EPLAN Data Portal 289-544



WSCAD Universe 289-544



## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Marking

##### 1.1.1.1 Marking strip



[Item No.: 709-196](#)

Marking strips; for laser printer; translucent



[Item No.: 709-177](#)

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



[Item No.: 709-178](#)

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

#### 1.1.2 Tool

##### 1.1.2.1 Operating tool



[Item No.: 210-720](#)


Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

## Installation Notes

### Conductor termination



Conductor termination – screwdriver actuation parallel to conductor entry




Conductor termination – screwdriver actuation perpendicular to conductor entry

### Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.