


Data Sheet | Item Number: 706-100/625-300

Connection cable; 25-pole; with solder pin; Female connector; open-ended; Length: 3 m; Conductor cross-section: 0.25 mm²

<https://www.wago.com/706-100/625-300>

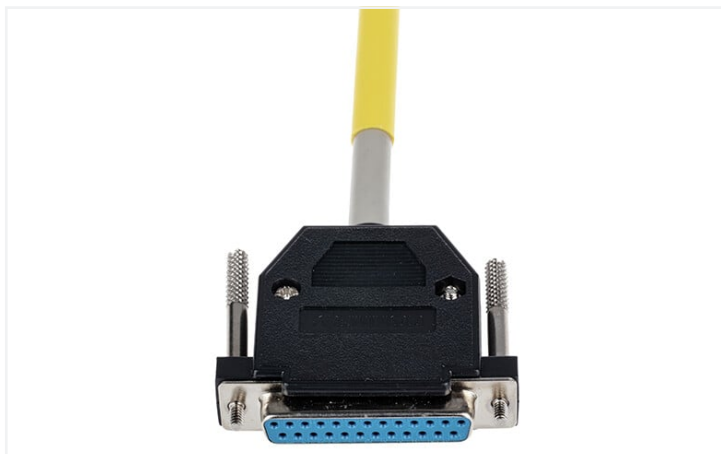

Color coding acc. to DIN VDE 47100	25 poles female Sub-D connector	
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
Yellow-Brown		16
White-Grey		17
Grey-Brown		18
White-Pink		19
Pink-Brown		20
White-Blue		21
Brown-Blue		22
White-Red		23
Brown-Red		24
White-Black		25
Shield		Connected to Sub-D

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

Operating voltage	≤ AC/DC 125 V
Current per wire (max.)	2 A

Connection data

Cable type	LiYCY
Color code	per DIN VDE 47100

Connection 1	
Connector	D-subminiature female connector
Pole number 1	25
Connection type 1	System
Wire cross-section	0.25 mm ²

Connection 2

Connector 2	open-ended
Connection type 2	open-ended

Physical data

Cable length	3 m
--------------	-----

Material data

Fire load	0 MJ
Weight	587 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821835677
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-100/625-300	
---	--