


Data Sheet | Item Number: 787-1711

Switched-mode power supply; Eco; 1-phase; 12 VDC output voltage; 4 A output current; DC-OK LED

<https://www.wago.com/787-1711>

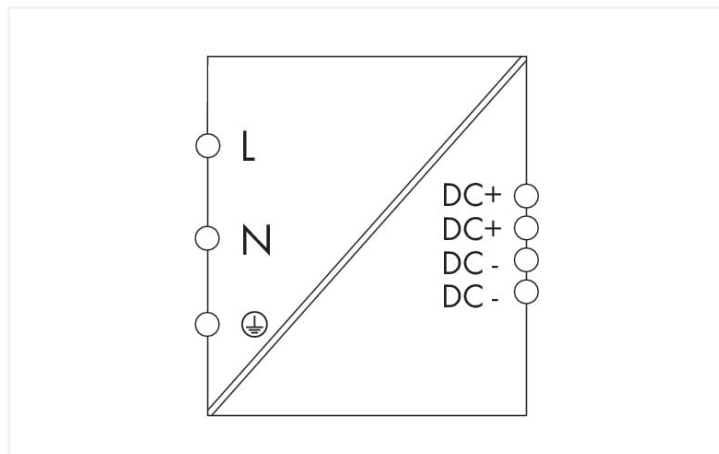

Similar to illustration

Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1; PELV per EN 60204
- DIN-35 rail mountable in different positions
- Direct installation on mounting plate via cable grip

Technical data

Input

Phases	1
Nominal input voltage $U_{i, \text{nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 90 ... 264 V; DC 125 ... 375 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	≤ 1.8 A (100 VAC)
Discharge current	≤ 3.5 mA
Inrush current	≤ 18 A
Power factor correction (PFC)	passive
Mains failure hold-up time	≥ 10 ms (230 VAC)

Output

Nominal output voltage $U_{o, \text{nom}}$	DC 12 V (SELV)
Output voltage range	DC 10 ... 14 V (adjustable)
Default setting	DC 12 V
Nominal output current $I_{o, \text{nom}}$	4 A (12 VDC; 110 ... 240 VAC); 3.2 A (12 VDC; 100 ... 240 VAC)
Nominal output power	48 W
Deviation	≤ 1 %
Residual ripple	≤ 150 mV (peak-to-peak)
Overload behavior	Constant power (in overload range: 1.05 ... 1.4 x $I_{o, \text{nom}}$); Shutdown and automatic restart in the event of a short circuit

Signaling and communication

Signaling	1 x LED DC OK (green)
Operation status indicator	Green LED (U_o)

Efficiency/power losses

Power loss P_i	≤ 9.6 W (230 VAC; 12 VDC; 4 A)
Efficiency (typ.)	80 % (230 VAC; 4 ADC)

Circuit protection

Internal fuse	F 2 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: B6, B10

Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ DC 14 V
Oversvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes, for 2 devices of the same type
MTBF	> 300,000 h (per IEC 61709)

Connection data

Connection type 1	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

Physical data

Width	40 mm / 1.575 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	99 mm / 3.898 inches

Mechanical data

Mounting type	DIN-35 rail Screw mount
---------------	----------------------------

Material data

Fire load	0.129 MJ
Weight	250 g

Environmental requirements

Ambient temperature (operation)	-20 ... +60 °C
Ambient temperature (storage)	-25 ... +75 °C
Relative humidity	10 ... 95 % (no condensation permissible)
Derating	-4 %/K (> 45 °C)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 61558-2-6 EN 62368-1 SEMI F47

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143656030
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	ba9a4dde-70b7-46d5-918c-d2e3694d1c3f
SCIP notification number (Czech Republic)	d82ac068-d9b6-4461-8538-91ca53ecf9ae

Approvals / Certificates

General approvals	Declarations of conformity and manufacturer's declarations
--------------------------	---



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02. B.00089_19

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 787-1711

Documentation

Bid Text			
787-1711	01.10.2019	xml 6.77 KB	
787-1711	25.11.2019	docx 17.40 KB	

Instruction Leaflet			
ECO Power Switched- Mode Power Supplies	V 1.4 21.12.2020	pdf 248.33 KB	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 787-1711	EPLAN Data Portal 787-1711
	ZUKEN Portal 787-1711

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-831
Marking strips; on reel; 2.3 mm wide; plain;
Self-adhesive; white

Item No.: 210-832
Marking strips; on reel; 3 mm wide; plain;
Self-adhesive; white

1.1.2 Tool

1.1.2.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a
partially insulated shaft; multicoloured

Item No.: 210-769
SCREWDRIVER; green