


Data Sheet | Item Number: 787-886

Redundancy Module; 2 x 48 VDC input voltage; 2 x 20 A input current; 48 VDC output voltage; 40 A output current; communication capability; 10,00 mm²



<https://www.wago.com/787-886>

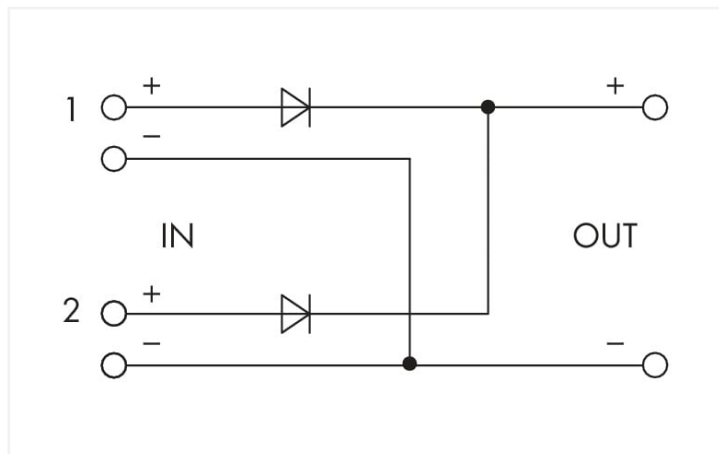

Features:

- Redundancy module with two inputs decouples two power supplies
- For redundant and fail-safe power supply
- With LED and potential-free contact for input voltage monitoring on site and remotely

Technical data

Input		Output	
Nominal input voltage $U_{i, nom}$	2 x DC 48 V	Nominal output voltage $U_{o, nom}$	DC 48 V
Input voltage range	2 x DC 36 ... 54 V	Output voltage range	DC 36 ... 54 V (U_e - voltage drop)
Nominal mains frequency range	0 Hz	Voltage drop	≤ 1 V (Input/output)
Input current I_i	≤ 20 A (per path); ≤ 40 A (in total)	Nominal output current $I_{o, nom}$	20 A (redundancy operation); 40 A (parallel operation)
		Nominal output power	1920 W
		Output power (max.)	≤ 2160 W

Signaling and communication

Signaling	1 x OUT LED (green) 1 x IN1 LED (yellow) 1 x IN2 LED (yellow) 1 x Isolated relay contact (max. 30 VDC; 1 A)
Operation status indicator	Green LED (U_o) 2 x Yellow LED (U_i)

Efficiency/power losses

Power loss P_i	≤ 1.7 W (48 VDC; no load); ≤ 20 W (48 VDC; 20 A); ≤ 40 W (48 VDC; 40 A)
Efficiency (typ.)	96 %

Circuit protection

Internal fuse	No
---------------	----

Safety and protection

Isolation voltage (connectors – housing)	DC 0.5 kV
Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	Yes
Resistance to reverse feed	≤ DC 60 V
Pollution degree	2
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type 1	Input/output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 831 Series
Solid conductor	0.5 ... 10 mm ² / 20 ... 8 AWG
Fine-stranded conductor	0.5 ... 10 mm ² / 20 ... 8 AWG
Strip length	13 ... 15 mm / 0.51 ... 0.59 inches
Connection type 2	Relay
Connection technology 2	CAGE CLAMP®
WAGO connector 2	WAGO 231 Series
Solid conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	40 mm / 1.575 inches
Height	181 mm / 7.126 inches
Depth from upper-edge of DIN-rail	163 mm / 6.417 inches
Note (dimensions)	Height with connector

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	0 MJ
Weight	860 g

Environmental requirements

Ambient temperature (operation)	-10 ... +60 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)

Standards and specifications	
Conformity marking	CE
Standards/specifications	EN 60950 EN 61000-6-2 EN 61000-6-3
Standards/specifications (pending)	UL 60950 UL 508

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821262725
Customs tariff number	85049017000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
			EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
			EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 787-886	↓

Documentation

Bid Text			
787-886	15.07.2019	xml 6.02 KB	
787-886	15.07.2019	docx 22.27 KB	

Instruction Leaflet		
Redundanzmodul	pdf 272.24 KB	

CAD/CAE-Data






CAE data	
EPLAN Data Portal 787-886	
WSCAD Universe 787-886	

1 Compatible Products




1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marker



 Item No.: 2009-145 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	 Item No.: 248-501 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	 Item No.: 793-5501 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white	 Item No.: 793-501 WMB marking card; as card; not stretchable; plain; snap-on type; white
 Item No.: 2009-115 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white			

1.1.1.2 Marking strip

 Item No.: 2009-110 Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white	 Item No.: 210-831 Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white	 Item No.: 210-832 Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white
---	--	---

1.1.2 Mounting adapter

1.1.2.1 DIN-rail adapter

 Item No.: 787-897 Carrier rail adapter made of zinc die-cast; for mounting 787-8xx devices to a DIN 35 rail	 Item No.: 787-896 Carrier rail adapter; for mounting 787-8xx devices to a DIN 35 rail
--	--

1.1.2.2 Wall-mount adapter



Item No.: 787-895

Mounting carrier; for screw fixing of 787-8xx devices on mounting plate or wall without DIN 35 rail

1.1.3 Tool

1.1.3.1 Operating tool



Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item No.: 210-721

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured