

IE-PS-RJ45-FH-BK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



RJ45 plug-in connector (tool-less) according to IEC 60603-7-51 for wire outer diameters up to 1.6 mm

General ordering data

Version	RJ45 IDC plug, Cat.6 _A / Class E _A (ISO/IEC 11801 2010), 8-core, 4-core, EIA/TIA T568 A, EIA/TIA T568 B, PROFINET
Order No.	1963600000
Type	IE-PS-RJ45-FH-BK
GTIN (EAN)	4032248645725
Qty.	10 pc(s).

Creation date July 31, 2024 9:23:25 AM CEST

Catalogue status 13.07.2024 / We reserve the right to make technical changes.

IE-PS-RJ45-FH-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	17.831 g
------------	----------

Temperatures

Operating temperature	-40 °C...70 °C
-----------------------	----------------

General data

Fire load	77 kJ	Halogen	No
Material locking lever	PA UL94-V0	Material strain relief	PA UL94-V0
Connection 1	RJ45	Connection 2	IDC
Configuration	Eight-wire field-assembled RJ45 plug with colour coding on the plug, TIA A/B/ ProfiNet, multiport-ready	Wiring	8-core, 4-core, EIA/TIA T568 A, EIA/TIA T568 B, PROFINET
Housing main material	Zinc diecast	Insulation cross-section, min.	0.85 mm
Insulation cross-section, max.	1.6 mm	Category	Cat.6 _A / Class E _A (ISO/IEC 11801 2010)
Contact material	Phosphorus bronze	Contact surface	Gold over nickel
Connection diameter, solid	0.41...0.64 mm	Conductor connection cross-section, solid (AWG)	AWG 24/1...AWG 22/1
Conductor connection cross-section, solid	0.13...0.32 mm ²	Connection diameter, flexible	0.48...0.76 mm
Conductor connection cross-section, flexible (AWG)	AWG 26/7...AWG 22/7	Wire connection cross section, finely stranded, min.	0.141 mm ²
Conductor connection cross-section, extremely flexible (AWG)	0.14...0.35 mm ² , Approval of the cable by Weidmüller necessary	Conductor connection cross-section, extremely flexible	, Approval of the cable by Weidmüller necessary
MICE classification M	M ₁	Note, very finely stranded line connection	Approval of the cable by Weidmüller necessary
MICE classification C	C ₁	MICE classification I	I ₁
Sheath diameter, min.	5.5 mm	MICE classification E	E ₃
Shielding	360°; all-round enclosure	Sheath diameter, max.	8.5 mm
Insertion force	≤ 30 N	Protection degree	IP20
Material insulator	PA UL94-V0	Plugging cycles	750
		Ability to reconnect	≥ 10 cycles (for the same or larger cross-section)

Electrical properties

Contact resistance	≤ 20 mΩ	Current-carrying capacity at 50 °C	1 A
Dielectric strength, contact / contact	≥ 1000 V AC/DC	Dielectric strength, contact / shield	≥ 1500 V AC/DC
Insulation strength	≥ 500 MΩ	PoE / PoE+	conforming to IEEE 802.3at

General standards

Application-specific communication cable facilities	PROFINET installation instructions	Certificate no. (cULus)	E316369
Connector standard	IEC 60603-7-5 1	IP protection classes	IEC 60529
UL standard for communication accessories	UL 1863		

IE-PS-RJ45-FH-BK

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Classifications

ETIM 6.0	EC001121	ETIM 7.0	EC001121
ETIM 8.0	EC001121	ETIM 9.0	EC001121
ECLASS 9.0	27-44-03-90	ECLASS 9.1	27-44-03-90
ECLASS 10.0	27-44-03-90	ECLASS 11.0	27-44-03-90
ECLASS 12.0	27-44-03-90	ECLASS 13.0	27-44-03-90

Environmental Product Compliance

REACH SVHC	/
RoHS Compliance Status	Compliant without exemption

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E316369

Downloads

Approval/Certificate/Document of Conformity	GOST Approval ISO/IEC EN and TIA/EIA Screened Class EA Category 6A, 4 connector channel DUXR,E316369 CC-Link IE-PS-RJ45-FH-BK PROFINET Manufacturer's Declaration
Engineering Data	CAD data – STEP
Engineering Data	Zuken E3.S
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN Manual
Catalogues	Catalogues in PDF-format
Brochures	MB FREECONTACT EN FL FIELDWIRING EN PI PROFINET CABLING EN PI PROFINET CABLING EN

Data sheet


IE-PS-RJ45-FH-BK

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Printing

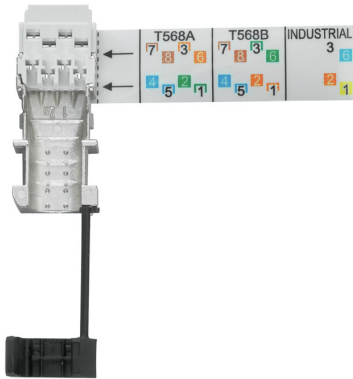

Dimensioned drawing

